


S.C. AVALON TOOLS IMPEX SRL
Bucuresti
Tel/Fax : 021-630.12.42
GSM : 0723-99 11 76 / 0764-22 03 71
e-mail : avalontools@yahoo.com
www.premiertc.ro

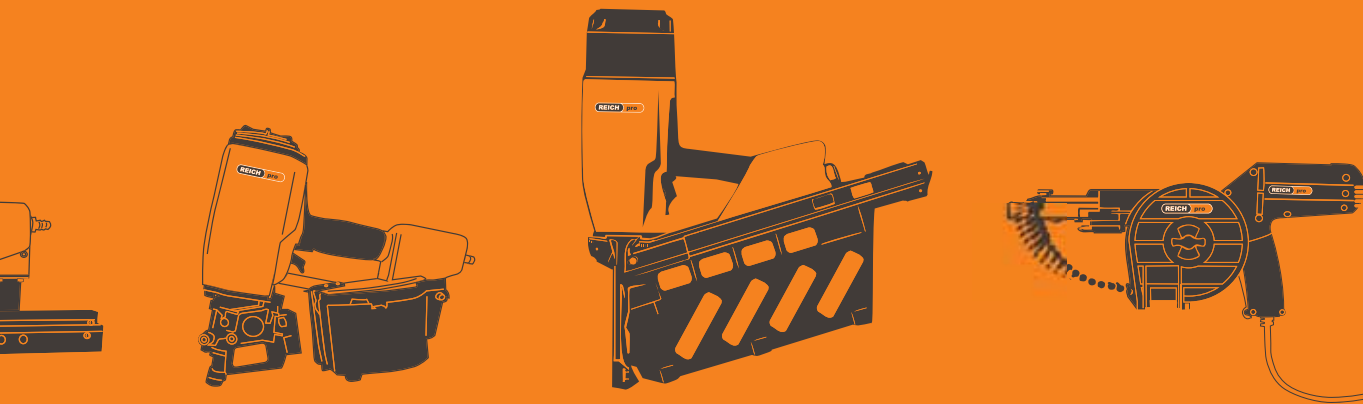

2010

2011

Fastening systems

REICH



Edited with the demo version of
Infix Pro PDF Editor

To remove this notice, visit:
www.iceni.com/unlock.htm

REICH®

In 1914 Karl Matthias Reich, who came from a Black Forest woodcutting and rafting family, founded the company which is now in its 4th generation. REICH by HOLZ-HER is our new trademark for equipment used in fastening technology.

REICH® pro

REICH *pro* equipment in the Premium series. The highest quality and comprehensive service guarantee low maintenance, reliability and long service life. The equipment is characterised by high loading capacity and simple, practical operation.

REICH® eco

REICH *eco* offers small low cost tools for professional requirements.

REICH® wire

REICH *wire* produces high quality fastening elements which are manufactured according to the regulations currently applicable.

Coil magazine nailers plastic collated. REICH pro	4
Coil magazine nailers wire collated. REICH pro	6
Coil magazine nailers Fasteners. REICH wire	8
Strip magazine nailers plastic collated. REICH pro	12
Strip magazine nailers paper collated. REICH pro	13
Strip magazine nailers Fasteners. REICH wire	16
Nailers for corrugated fasteners REICH pro	20
Nailers for corrugated fasteners Fasteners. REICH wire	21
Staplers REICH pro	22
Staplers REICH eco	25
Staplers Fasteners. REICH wire	26
Combination nailers REICH pro	30
Combination nailers REICH eco	31
Pin, brad nailers REICH pro	32
Pin, brad nailers REICH eco	34
Palm nailers. Combi package REICH eco	35
Pin, brad nailers Fasteners. REICH wire	36
Compressors REICH eco	38
Magazine screwdrivers REICH pro	40
Magazine screwdrivers Fasteners. REICH wire	42
Accessories for pneumatic tools	46
Accessories for screwdrivers	47
Service Guarantee	48



Edited with the demo version of
Infix Pro PDF Editor

To remove this notice, visit:
www.iceni.com/unlock.htm

Attractive plastic coil system from REICH pro



Why plastic coils?

- Robust!
No deforming. Wire binding can no longer be worked after it has been deformed e.g. through drop.
- No contact corrosion caused by wire collation of A2 fasteners!
- No more metal sharings or dropping - increased safety
- Clean and trouble-free work.

Board nailer 3538 pro



Accessories	
Support for facing panels	72 7237
Suspension	31 7802




Coil magazine nailer 3528 pro



Special version. Base with a large support plate to avoid pressure marks with visible nailing.



Accessories	
Safety yoke with large support plate	73 0248
Suspension	71 3287




Coil magazine nailer 3557 pro



Accessories	
Safety yoke, adjustable with large support plate	73 5280
Suspension	71 3287



Coil magazine nailer 3590 pro

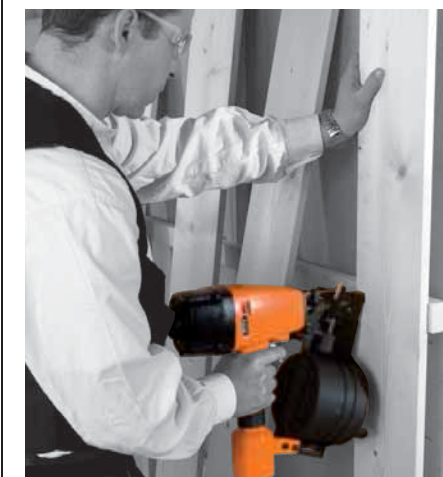

Accessories	
Suspension	request











Coil magazine nailer 3514 pro



Accessories	
Suspension	31 7802



Nail length (mm)	32 - 55	50 - 80
Nail shank Ø (mm)	2.0 - 2.5	2.5 - 3.1
Nail binding	K 20°	K 20°
Smooth-shank nails 	•	•
Ring-shank nails 	•	•
Ring-shank nails, pan head 	•	•
Screw nails 		•
Type	3538	3528
Height/length (mm)	270/280	310/330
Weight (kg) (without fasteners)	2.3	3.3
Air consumption (l/shot)	1.6	2.6
Magazine capacity, no. of fasteners	375	250
Penetration depth setting	•	•
Code	Contact actuation 3538 0000 Single sequential 3538 0010 Special version -	3528 0000 3528 0010 3528 0410

Nail length (mm)	60 - 90	60 - 90	70 - 100
Nail shank Ø (mm)	2.8 - 3.4	2.8 - 3.4	3.1 - 3.8
Nail binding	K 20°	K 20°	K 20°
Smooth-shank nails 	•	•	•
Ring-shank nails 	•	•	•
Ring-shank nails, pan head 	•	•	•
Screw nails 	•	•	•
Type	3557	3590	3514
Height/length (mm)	320/350	320/310	360/350
Weight (kg) (without fasteners)	3.5	3.2	4.3
Air consumption (l/shot)	3.3	2.7	4.8
Magazine capacity, no. of fasteners	250	250	250
Penetration depth setting	• optional	•	
Code	Contact actuation 3557 0000 Single sequential 3557 0410 Singel/contact: switchable -	- 3590 0000	3514 0000 3514 0010 -

Wire collated system



Roofing nailer **3516 pro**



Range of uses:
Bitumen shingles, roofing strips, insulating materials, cardboard, insulation, cardboard to wood, packaging etc.



Coil magazine nailer **3510 pro**



Coil magazine nailer **3508 pro**



Coil magazine nailer **3515 pro**



Accessories
Suspension 71 3287



Coil magazine nailer **3539 pro**











Accessories
Suspension 31 7802




EPAL Coil magazine nailer **3543 pro**



Nail length (mm)	19 - 45	27 - 50	32 - 50
Nail shank Ø (mm)	3.0	1.47 - 2.1	2.1
Head Ø (mm)	10.5	-	-
Nail binding	D 16°	D 16°	D 16°
Roofing nails 	•		
Smooth-shank nails 		•	•
Ring-shank nails 		•	•
Ring-shank nails, pan head 			
Type	3516	3510	3508
Height/length (mm)	270/255	284/258	285/305
Weight (kg) (without fasteners)	2.3	1.5	1.9
Air consumption (l/shot)	1.6	0.73	1.65
Magazine capacity, no. of fasteners	120	200 - 400	200 - 400
Penetration depth setting	•	•	
Code	Contact actuation - Single sequential actuation - Singel/contact: switchable 3516 0000	- - 3510 0000	3508 0000 - -

Nail length (mm)	38 - 70	45 - 90	55 - 100
Nail shank Ø (mm)	2.3 - 3.1	2.5 - 3.4	2.5 - 3.8
Head Ø (mm)	-	-	-
Nail binding	D 16°	D 16°	D 16°
Smooth-shank nails 	•	•	
Ring-shank nails 	•	•	
Ring-shank nails, pan head 	•	•	
EPAL nails 			•
Type	3515	3539	3543
Height/length (mm)	320/330	370/388	340/420
Weight (kg) (without fasteners)	2.9	3.8	5.35
Air consumption (l/shot)	1.6	4.5	5.38
Magazine capacity, no. of fasteners	250 - 300	225 - 275	225 - 300
Penetration depth setting	•	•	
Code	Contact actuation 3515 0000 Single sequential actuation - Singel/contact: switchable -	- - 3539 0001	3543 0000 - -


Smooth-shank nail coils - K 20°

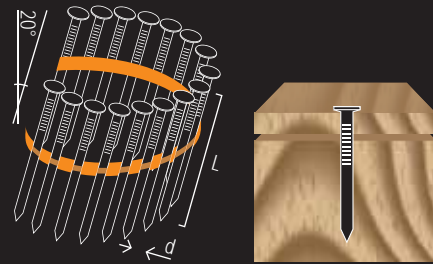

d x L (mm)		3538			Code
2.2 x 32	BK	●		21,000 504,000	64 4803
2.2 x 40	BK	●		18,000 324,000	64 4811
2.2 x 45	H BK	●		15,000 270,000	65 1095
2.2 x 50	H BK	●		15,000 270,000	65 1109
2.2 x 55	H BK	●		12,000 288,000	65 1117
2.5 x 55	H BK	●		12,000 216,000	68 9602
2.2 x 50	H GALV	●		15,000 270,000	62 8727

d x L (mm)		3528	3557	3590	3514	Code
2.5 x 50	H BK	●				10,000 180,000 63 9591
2.5 x 55	H BK	●				8,000 192,000 63 9230
2.5 x 60	H BK	●				8,000 192,000 63 9249
2.5 x 65	H BK	●				8,000 144,000 62 6309
2.5 x 70	H BK	●				8,000 144,000 65 0447
2.8 x 60	H BK	●	●	●		8,000 192,000 72 5269
2.8 x 65	H BK	●	●	●		6,000 144,000 65 0463
2.8 x 70	H BK	●	●	●		6,000 144,000 63 9621
2.8 x 75	H BK	●	●	●		6,000 144,000 63 9257
2.8 x 80	H BK	●	●	●		6,000 144,000 63 9265
3.1 x 65	H BK	●	●	●		6,000 144,000 61 9213
3.1 x 70	H BK	●	●	●	●	6,000 144,000 63 9273
3.1 x 80	H BK	●	●	●	●	4,000 120,000 65 0471
3.1 x 90	H BK		●	●	●	3,200 96,000 69 5033
3.4 x 90	H BK		●	●	●	3,200 96,000 69 5068
3.4 x 100	H BK			●	●	3,200 76,800 70 9492
3.8 x 100	H BK			●	●	3,200 76,800 70 9344
2.5 x 55	H GALV	●				8,000 192,000 63 9370
2.8 x 65	H GALV	●	●	●		6,000 144,000 63 9389
2.8 x 70	H GALV	●	●	●		6,000 144,000 62 4802
2.8 x 80	H GALV	●	●	●		6,000 144,000 61 9663
3.1 x 70	H GALV	●	●	●	●	6,000 144,000 61 9345
3.1 x 80	H GALV	●	●	●	●	4,000 120,000 61 9388
3.1 x 90	H GALV		●	●	●	3,200 96,000 71 2086
3.4 x 90	H GALV		●	●	●	3,200 96,000 69 9454

Screw nail coils - K 20°, TX

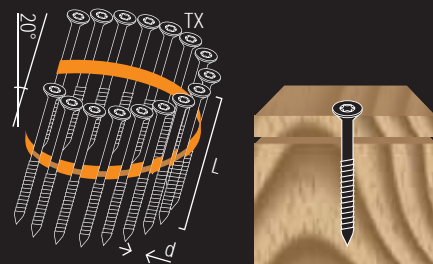

d x L (mm)		3528	3557	3590	3514	Code
2.8/3.1 x 60	H BK	●	●	●		8,000 192,000 73 3028
2.8/3.1 x 50	H GALV	●				10,000 180,000 73 1089
2.8/3.1 x 60	H GALV	●	●	●		8,000 192,000 73 1070
2.8/3.1 x 70	H GALV	●	●	●	●	6,000 144,000 73 1092
3.1/3.4 x 80	H GALV		●	●	●	4,000 120,000 73 1094
2.8/3.1 x 50	H A 2	●				2,000 180,000 73 3010
2.8/3.1 x 65	H A 2	●	●	●		2,000 144,000 73 3013
3.1/3.4 x 80	H A 2		●	●	●	1,000 50,000 73 3016

Screw nails are detachable nailed joints. They are shot into the elements to be joined by means of a nailer, and can be removed from the joint again with a cordless or manual screwdriver. Machine driving saves time spent on manual screwing. Applications are formwork, packaging materials or scenery construction.

d x L (mm)		3538			Code
2.0/2.2 x 35	BK	●		21,000 504,000	64 4501
2.2/2.5 x 32	H BK	●		21,000 504,000	73 0960
2.2/2.5 x 40	BK	●		18,000 324,000	64 4609
2.2/2.5 x 45	H BK	●		15,000 270,000	64 4617
2.2/2.5 x 50	H BK	●		15,000 270,000	64 4552
2.2/2.5 x 45	H GALV	●		15,000 270,000	65 2288
2.2/2.5 x 40	A 2	●		3,000 150,000	69 7060
2.2/2.5 x 45	A 2	●		3,000 150,000	72 6168
2.2/2.5 x 50	H A 2	●		3,000 150,000	71 3503

d x L (mm)		3528	3557	3590	3514	Code
2.5/2.8 x 50	H BK	●				10,000 180,000 63 9362
2.5/2.8 x 60	H BK	●	●	●		8,000 192,000 63 9354
2.5/2.8 x 65	H BK	●	●	●		8,000 144,000 63 9737
2.8/3.1 x 65	H BK	●	●	●		6,000 144,000 62 0351
2.8/3.1 x 75	H BK	●	●	●	●	6,000 144,000 61 9418
2.8/3.1 x 80	H BK	●	●	●	●	6,000 144,000 69 5084
3.1/3.4 x 80	H BK		●	●	●	4,000 120,000 64 4404
3.1/3.4 x 90	H BK		●	●	●	3,200 96,000 71 3465
2.8/3.1 x 60	H GALV	●	●	●		8,000 192,000 70 3338
2.8/3.1 x 70	H GALV	●	●	●	●	6,000 144,000 68 3752
3.1/3.4 x 90	H GALV		●	●	●	3,200 96,000 73 0242
2.8/3.1 x 65	H A 2	●	●	●		6,000 144,000 73 0877
2.8/3.1 x 70	H A 2	●	●	●	●	6,000 144,000 71 6359
2.8/3.1 x 80	H A 2	●	●	●	●	6,000 144,000 73 0881

Ring-shank nails are special nails according to DIN 1052 Part 2, load carrying class III. Classification certificate available on request. They have a high extraction value because of the grooved shank and they are therefore ideal for use in structural timberwork.


d x L (mm)		3538	3528	3557	3590	3514	Code
2.2/2.5 x 50	H A 2 E	●					3,000 150,000 73 1087
2.8/3.1 x 65	H A 2 E		●	●	●		6,000 144,000 73 1583
2.8/3.1 x 80	H A 2 E		●	●	●	●	6,000 144,000 73 1585
3.1/3.4 x 90	H A 2 E			●	●	●	3,200 96,000 73 4252

Ring-shank nails are special nails according to DIN 1052 Part 2, load carrying class III. Classification certificate available on request. They have a high extraction value because of the grooved shank and they are therefore ideal for use in structural timberwork.


d x L (mm)		3538			Code
2.2/2.5 x 32	GV	●		21,000 378,000	70 4962
2.2/2.5 x 40	GV	●		18,000 324,000	70 4970
2.2/2.5 x 45	GV	●		18,000 324,000	70 4989

Plasterboard nails, for plasterboard panels according to DIN 18 182 part 4.


Ring-shank nail coils - K 20°

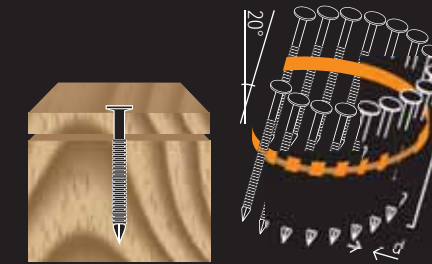


Ring-shank nail coils - K 20° with pan head

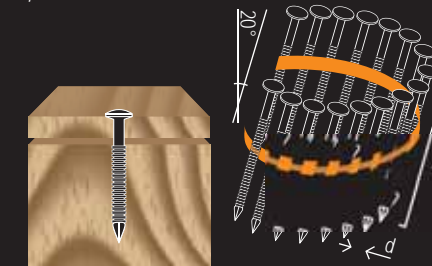

Plasterboard nail coils, ring-shank - K 20°

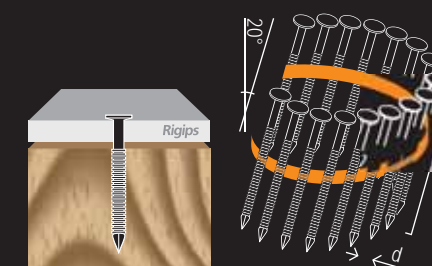


Ring-shank nail coils for facing panels - K 20°, stove-enamelled



d x L (mm)				3538			Code
2.2/2.4 x 37	BK	A2	▲	●	4,500	225,000	70 9522
2.2/2.4 x 37	black	A2	▲	●	4,500	225,000	70 9638
2.2/2.4 x 37	brown	A2	▲	●	4,500	225,000	70 9557

Stainless (VA) ring-shank nails for facing panels with colour coating (black, brown). The cladding sheet nails are manufactured from high quality stainless steel and are lacquered in various colours. This ensures that the nails are extremely weather resistant and can be used for cladding sheets according to colour. The shank of these nails is roughened, which increases the extraction resistance and therefore guarantees secure fixing of the cladding sheets.



Ring-shank nail coils - D 16° with pan head



d x L (mm)				3515	3539		Code
2.8/3.1 x 70	H	A 2	▲	●		6,000	180,000 73 4528
2.8/3.1 x 80	H	A 2	▲	●	●	4,500	135,000 73 4529

Ring-shank nails are special nails according to DIN 1052 Part 2, load carrying class III. Classification certificate available on request. They have a high extraction value because of the grooved shank and they are therefore ideal for use in structural timberwork.

Ring-shank nail coils - D 16°



d x L (mm)				3510	3508		Code
2.1/2.3 x 27		BK	E	●	●	21,600	648,000 73 4513
2.1/2.3 x 32	H	BK	E	●	●	19,200	579,000 73 4965
2.1/2.3 x 35	H	BK	E	●	●	16,800	504,000 73 4907
2.1/2.3 x 40	H	BK	E	●	●	16,800	504,000 73 5513
2.1/2.3 x 45	H	BK	E	●	●	14,000	445,500 73 4908

d x L (mm)				3515	3539		Code
2.3/2.5 x 45	H	BK	E	●	●	10,800	324,000 73 3573
2.3/2.5 x 50	H	BK	E	●	●	9,000	270,000 73 3574
2.3/2.5 x 55	H	BK	E	●	●	9,000	270,000 73 3575
2.3/2.5 x 60	H	BK	E	●	●	7,200	216,000 73 3576
2.3/2.5 x 65	H	BK	E	●	●	7,200	216,000 73 3577
2.5/2.8 x 60	H	BK	E	●	●	7,200	216,000 73 3578
2.5/2.8 x 65	H	BK	E	●	●	7,200	216,000 73 3579
2.5/2.8 x 70	H	BK	E	●	●	7,200	216,000 73 3580
2.8/3.1 x 60	H	BK	E	●	●	6,000	180,000 73 3835
2.8/3.1 x 70	H	BK	E	●	●	6,000	180,000 73 3648
2.8/3.1 x 80	H	BK	E		●	4,500	135,000 73 3649
3.1/3.4 x 90	H	BK	E		●	4,000	120,000 73 3888
2.5/2.8 x 60	H	GALV	E	●	●	7,200	216,000 73 3676
2.5/2.8 x 65	H	GALV	E	●	●	7,200	216,000 73 5300
2.8/3.1 x 80	H	GALV	E		●	4,500	135,000 73 5301

Ring-shank nails are special nails according to DIN 1052 Part 2, load carrying class III. Classification certificate available on request. They have a high extraction value because of the grooved shank and they are therefore ideal for use in structural timberwork.


d x L (mm)				3510	3508		Code
2.1 x 40	H	BK		●	●	16,800	504,000 73 4909
2.1 x 45	H	BK		●	●	14,400	432,000 73 5057
2.1 x 50	H	BK		●	●	12,000	360,000 73 4910

d x L (mm)				3515	3539		Code
2.3 x 45	H	BK		●		10,800	324,000 73 3559
2.3 x 50	H	BK		●		9,000	270,000 73 3560
2.3 x 55	H	BK		●		9,000	270,000 73 3561
2.3 x 60	H	BK		●		7,200	216,000 73 3562
2.5 x 50	H	BK		●	●	9,000	270,000 73 3565
2.5 x 55	H	BK		●	●	9,000	270,000 73 3566
2.5 x 60	H	BK		●	●	7,200	216,000 73 3567
2.5 x 65	H	BK		●	●	7,200	216,000 73 3568
2.5 x 70	H	BK		●	●	7,200	216,000 73 3569
2.8 x 65	H	BK		●	●	6,000	180,000 73 3571
2.8 x 70	H	BK		●	●	6,000	180,000 73 3643
2.8 x 80	H	BK		●	●	4,500	135,000 73 3644
3.1 x 80	H	BK			●	4,000	120,000 73 4512
3.1 x 90	H	BK			●	4,000	120,000 73 3645
2.3 x 45	H	GALV		●		10,800	324,000 73 3563
2.8 x 65	H	GALV		●	●	6,000	180,000 73 3572
2.8 x 70	H	GALV		●	●	6,000	180,000 73 3646
3.1 x 80	H	GALV			●	4,000	120,000 73 4900
3.1 x 90	H	GALV			●	4,000	120,000 73 3647


d x L (mm)				3516			Code
3.0 x 19		GALV		●		7,200	345,600 66 7250
3.0 x 22		GALV		●		7,200	345,600 66 7242
3.0 x 25		GALV		●		7,200	345,600 66 6653
3.0 x 28		GALV		●		7,200	345,600 66 5347
3.0 x 32		GALV		●		7,200	345,600 66 5355
3.0 x 38		GALV		●		7,200	345,600 66 5363
3.0 x 45		GALV		●		7,200	345,600 66 5371
3.0 x 19		FEUV	▲	●		7,200	345,600 66 5312
3.0 x 22		FEUV	▲	●		7,200	345,600 66 5320
3.0 x 25		FEUV	▲	●		7,200	345,600 66 5339
3.0 x 19		A 2	▲	●		7,200	345,600 66 7668
3.0 x 22		A 2	▲	●		7,200	345,600 66 7676
3.0 x 25		A 2	▲	●		7,200	345,600 66 7684

Roofing nails are manufactured with an extremely large head. They are used for nailing slate slabs, roofing felt, plastic materials and in wooden packaging materials, etc. The large head prevents the nail being pulled through.

Smooth-shank nail coils - D 16°

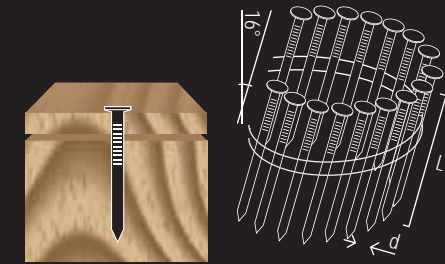

Roofing nail coils - D 16°

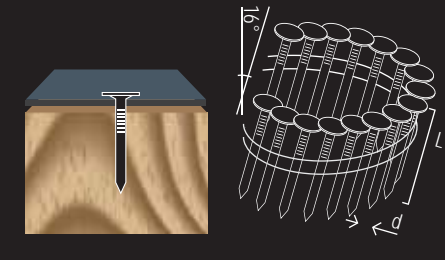

Strip binding system



When to strip bind?

Strip magazine nailers are handy to use and are of low weight even in the case of large nail dimensions.

Anchoring nailer 3522 pro



The projecting head of the anchoring nails makes it easier to meet the holes in the perforated plates.



Accessories	
Suspension	71 3287




Strip magazine nailer 3548 pro



Accessories: Base with a large support plate to avoid pressure marks with visible nailing.



Accessories		
Safety yoke with a large support plate	73 5059	
Suspension	71 3287	



Strip magazine nailer 3534 pro



Special version. Strip magazine nailer with adjustable safety yoke and large support plate to avoid pressure marks with visible nailing.



Accessories		
Safety yoke, adjustable with large support plate	73 4547	
Suspension	73 4894	




Strip magazine nailer 3541 pro



Strip magazine nailer 3533 pro



For 34° paper collated nail strips

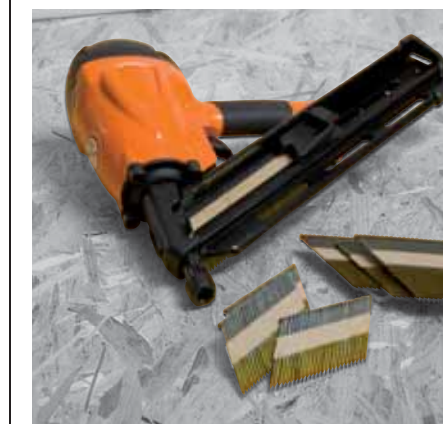

Nail length (mm)	40 - 60	45 - 80
Nail shank Ø (mm)	4.0	2.5 - 3.1
Nail binding	K 25°	K 20°
Anchoring nails	•	
Smooth-shank nails		•
Ring-shank nails		•
Screw-shank nails		•
Drill nails		•
Type	3522	3548
Dimensions: height/length (mm)	345/525	330/520
Weight (kg) (without fasteners)	4.1	3.4
Air consumption (l/shot)	2.8	2.6
Magazine capacity, no. of fasteners	50	70
Penetration depth setting		•
Code	Contact actuation Single sequential actuation Special version	3548 0000 3548 0010 -

Nail length (mm)	65 - 100	65 - 100	64 - 100
Nail shank Ø (mm)	2.8 - 3.8	2.8 - 3.4	2.8 - 3.4
Nail binding	K 20°	K 20°	P 34°
Smooth-shank nails	•	•	•
Ring-shank nails	•	•	
Screw-shank nails	•	•	
Drill nails	•	•	
Type	3534	3541	3533
Dimensions: height/length (mm)	385/530	370/540	363/353
Weight (kg) (without fasteners)	4.4	3.7	3.7
Air consumption (l/shot)	5.0	2.9	2.9
Magazine capacity, no. of fasteners	56 - 70	56 - 70	56 - 70
Penetration depth setting	• option	•	•
Code	Contact actuation Single sequential actuation Special version	3534 0000 changeable 3534 0410	3541 0000 changeable -

Strip magazine nailer 3535 pro



Accessories
Suspension 73 3841



Strip magazine nailer 3536 pro



Accessories
Suspension 73 3841



Strip magazine nailer 3545 pro



Accessories
Suspension 73 3841



Anchoring nailer 3722 eco



Strip magazine nailer 3735 eco




Accessories
Suspension 31 7802



Nail length (mm)	80 - 130	100 - 160	145 - 220
Nail shank Ø (mm)	3.1 - 4.2	3.8 - 5.0	4.6 - 5.0
Nail binding	K 20°	K 20°	K 20°
Anchoring nails			
Smooth-shank nails	•	•	•
Ring-shank nails	•	•	•
Screw-shank nails	•	•	
Drill nails	•		
Type	3535	3536	3545
Dimensions: height/length (mm)	410/540	480/540	550/600
Weight (kg) (without fasteners)	6.4	7.2	8.45
Air consumption (l/shot)	6.2	7.1	8.1
Magazine capacity, no. of fasteners	56 - 75	44 - 56	44 - 56
Penetration depth setting			
Code	Contact actuation Single sequential actuation Special version	- 3536 0010 -	- 3545 0010 -

Nail length (mm)	40 - 50	80 - 130	
Nail shank Ø (mm)	4.0	3.1 - 4.2	
Nail binding	K 25°	K 20°	
Anchoring nails	•		
Smooth-shank nails		•	
Ring-shank nails		•	
Screw-shank nails		•	
Drill nails		•	
Type	7522	3735	
Dimensions: height/length (mm)	366/352	502/620	
Weight (kg) (without fasteners)	2.55	5.2	
Air consumption (l/shot)	1.73	9.6	
Magazine capacity, no. of fasteners	25	56 - 70	
Penetration depth setting		•	
Code	Contact actuation Single sequential actuation Special version	- 3722 0010 -	- 3735 0010 -

Smooth-shank nail strips - K 20°

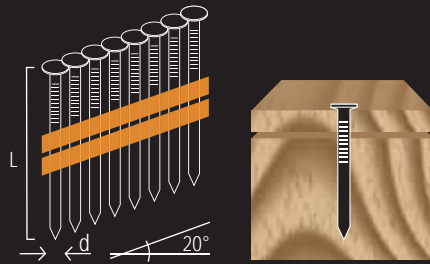

d x L (mm)		3554			Code
2.2 x 40	BK	●	6,000	288,000	31 9767
2.2 x 45	BK	●	6,000	288,000	31 9775
2.2 x 50	BK	●	6,000	288,000	51 3954

d x L (mm)		3548	3534	3541	3735	3535	3536	3545	3735	Code
2.5 x 45	BK	●								6,000 240,000 25 6633
2.5 x 50	BK	●								6,000 288,000 25 6641
2.5 x 55	BK	●								6,000 288,000 25 6668
2.5 x 60	H BK	●								6,000 240,000 25 6676
2.5 x 65	H BK	●								4,000 288,000 31 9864
2.8 x 60	H BK	●								5,000 240,000 25 6706
2.8 x 65	H BK	●	●	●						4,000 192,000 25 6714
2.8 x 70	H BK	●	●	●						4,000 192,000 25 6722
2.8 x 75	H BK	●	●	●						4,000 192,000 25 6730
2.8 x 80	H BK	●	●	●						4,000 144,000 25 6749
3.1 x 65	H BK	●	●	●						4,000 192,000 25 6757
3.1 x 70	H BK	●	●	●						4,000 192,000 25 6765
3.1 x 80	H BK	●	●	●	●	●			●	4,000 192,000 25 6781
3.1 x 90	H BK		●	●	●	●			●	4,000 192,000 25 6803
3.4 x 90	H BK		●	●	●	●			●	3,000 144,000 25 6811
3.4 x 100	H BK		●	●	●	●			●	3,000 144,000 50 5595
3.8 x 100	H BK		●		●	●	●		●	2,000 96,000 50 5617
3.8 x 110	H BK				●	●	●		●	1,400 67,200 51 8700
3.8 x 120	H BK				●	●	●		●	1,400 67,200 51 8719
3.8 x 130	H BK				●	●	●		●	1,400 67,200 51 8735
4.2 x 120	H BK					●	●		●	1,400 67,200 51 8727
4.2 x 130	H BK					●	●		●	1,400 67,200 51 8743
4.2 x 145	H BK						●			1,000 60,000 62 3849
4.6 x 145	H BK						●	●		500 30,000 38 8343
4.6 x 160	H BK						●	●		500 30,000 39 4734
5.0 x 160	H BK						●	●		500 30,000 38 8092
5.0 x 180	H BK							●		550 19,800 73 7642
5.0 x 200	H BK							●		550 19,800 73 7644
4.6 x 220	H BK							●		73 7942
2.8 x 55	H GALV	●								6,000 288,000 25 7133
2.8 x 65	H GALV	●	●	●						4,000 192,000 18 3245
2.8 x 70	H GALV	●	●	●						4,000 192,000 25 7168
3.1 x 70	H GALV	●	●	●						4,000 192,000 18 3253
3.1 x 80	H GALV	●	●	●	●	●			●	4,000 192,000 25 3405
3.1 x 90	H GALV		●	●	●	●			●	4,000 144,000 72 6001
3.4 x 90	H GALV		●	●	●	●			●	3,000 144,000 25 7222
3.4 x 100	H GALV		●	●	●	●			●	3,000 144,000 73 3818
3.8 x 100	H GALV		●		●	●	●		●	2,000 96,000 50 6362
3.8 x 110	H GALV				●	●	●		●	1,400 67,200 52 7297
3.8 x 120	H GALV				●	●	●		●	1,400 67,200 52 7300
3.8 x 130	H GALV				●	●	●		●	1,400 67,200 52 7319
4.2 x 130	H GALV				●	●	●		●	1,400 67,200 52 7335
4.6 x 160	H GALV					●	●			500 30,000 62 9030
5.0 x 160	H GALV					●	●			500 30,000 61 5234
2.5 x 65	H A2	●								4,000 192,000 73 0024
2.8 x 65	H A2	●	●	●						3,000 192,000 67 4648
3.1 x 90	H A2		●	●	●	●			●	3,000 144,000 68 7162
3.4 x 90	H A2		●	●	●	●			●	2,000 120,000 68 7138

d x L (mm)		3554			Code
2.2/2.5 x 35	BK E	●	6,000	288,000	50 6621
2.2/2.5 x 45	BK E	●	6,000	288,000	50 6699
2.5/2.8 x 50	BK E	●	7,000	288,000	51 3962

d x L (mm)		3548	3534	3541	3735	3535	3536	Code
2.8/3.1 x 65	H BK E	●	●	●				4,000 192,000 51 5183
2.8/3.1 x 70	H BK E	●	●	●				4,000 192,000 51 5191
2.8/3.1 x 75	H BK E	●	●	●				4,000 144,000 61 1662
2.8/3.1 x 80	H BK E	●	●	●				4,000 192,000 68 7227
3.1/3.4 x 70	H BK E		●	●				4,000 192,000 51 5205
3.1/3.4 x 80	H BK E		●	●	●	●		4,000 192,000 51 5213
3.1/3.4 x 90	H BK E		●	●	●	●		4,000 192,000 68 7251
3.8/4.2 x 120	H BK E				●	●	●	1,400 67,200 73 3795
3.8/4.2 x 130	H BK E				●	●	●	1,400 67,200 38 7525
2.8/3.1 x 65	H GALV E	●	●	●				4,000 192,000 71 6278
3.1/3.4 x 70	H GALV E		●	●				4,000 192,000 70 7031

Ring-shank nails are special nails according to **DIN 1052 Part 2**, load carrying class III. Classification certificate available on request. They have a high extraction value because of the grooved shank and they are therefore ideal for use in structural timberwork.


d x L (mm)		3548	3534	3541	3735	3535		Code
2.8/3.1 x 65	H A2	●	●	●			3,000 192,000	73 4823
2.8/3.1 x 80	H A2	●	●	●			4,000 144,000	73 4824
3.1/3.4 x 90	H A2		●	●	●	●	3,000 180,000	73 4825

Ring-shank nails are special nails according to **DIN 1052 Part 2**, load carrying class III. Classification certificate available on request. They have a high extraction value because of the grooved shank and they are therefore ideal for use in structural timberwork.


d x L (mm)		3535	3536		Code
3.4/3.7 x 90	H BK	●	●	3,000 144,000	71 6324

EPAL ring-shaft nails are licensed pallet nails.


Ring-shank nail strips - K 20°

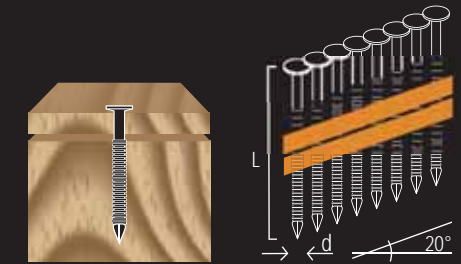


Ring-shank nail strips - K 20° with pan head

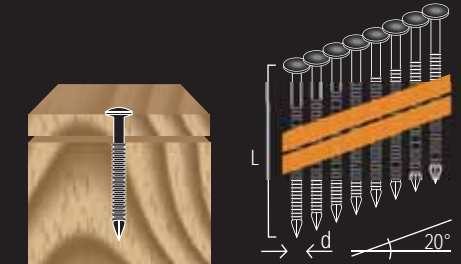

Ring-shank nail strips EPAL - K 20°




Anchoring nails - K 25°

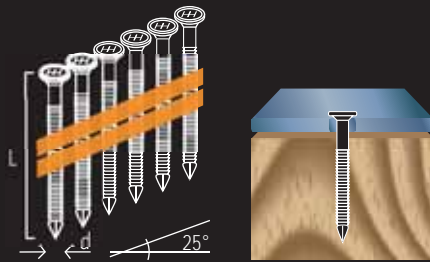

d x L (mm)			3522	3722			Code
4.0 x 40	GALV	E	●	●	1,000	144,000	38 8149
4.0 x 50	GALV	E	●	●	1,000	144,000	38 8157
4.0 x 60	GALV	E	●	●	1,000	144,000	38 8165
4.0 x 50	A 2	E	●	●	1,000	90,000	71 3384

Anchoring nails are used primarily for the secure fixing of steel plates and steel plate mouldings (beam joiners) with wood in supporting structures. They guarantee a high degree of static safety. A classification certificate is available on request according to the classification of the official Materials Testing Institute for Building.


Screw-shank nail strips - K 20°

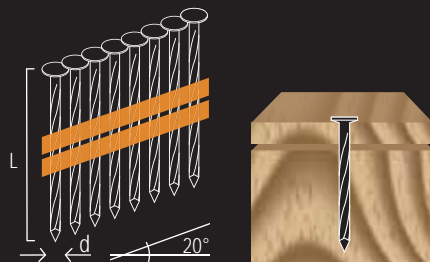

d x L (mm)			3548	3534	3541	3735	3535	3536			Code
3.1/3.5 x 45	BK		●						5,000	240,000	53 9511
3.1/3.5 x 50	BK		●						5,000	200,000	21 3071
3.1/3.5 x 65	H BK		●	●	●				4,000	192,000	21 3098
3.1/3.5 x 80	H BK			●	●	●	●		4,000	192,000	25 6366
3.1/3.5 x 90	H BK			●	●	●	●		4,000	192,000	68 7197
3.6/4.2 x 90	H BK					●	●		3,000	72,000	52 6444
3.8/4.2 x 120	H BK						●	●	1,400	67,200	73 6287
3.1/3.5 x 90	H GALV			●	●	●	●		3,000	144,000	73 6074
3.8/4.2 x 110	H GALV						●	●	1,400	67,200	73 8223
3.8/4.2 x 120	H GALV						●	●	1,400	67,200	73 8220

Because of the screw shank they have a high extraction value and are therefore ideal for use in structural timberwork.

Drill nail strip, Ardox - K 20°

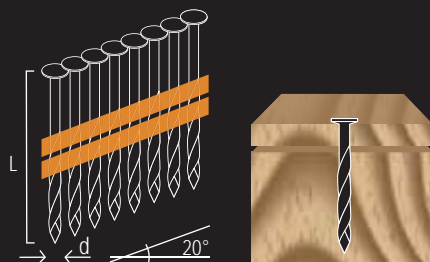

d x L (mm)			3548	3534	3541	3735	3535			Code
3.2 x 70	H BK		●	●	●			4,000	228,000	31 9961
3.2 x 80	H BK		●	●	●	●	●	4,000	180,000	31 9988
3.2 x 90	H BK		●	●	●	●	●	4,000	192,000	31 9996


The drill nail has a rectangular cross-section which turns in on itself, i.e. it is twisted. Twisting gives rise to an increased extraction value relative to smooth-shank nails.

d x L (mm)			3533			Code
2.8 x 64	H BK		●	3,000	324,000	73 5181
2.8 x 70	H BK		●	3,000	324,000	73 5182
2.8 x 75	H BK		●	2,000	216,000	73 5183
2.8 x 80	H BK		●	2,000	225,000	73 5184
3.1 x 80	H BK		●	2,000	180,000	73 5185
3.1 x 90	H BK		●	2,000	216,000	73 5186
3.4 x 100	H BK		●	2,000	216,000	73 5321
2.8 x 64	H GALV		●	2,500	225,000	73 5187
2.8 x 70	H GALV		●	2,500	225,000	73 5188
2.8 x 75	H GALV		●	2,500	225,000	73 5189
2.8 x 80	H GALV		●	2,500	216,000	73 5190
3.1 x 90	H GALV		●	2,000	216,000	73 6274


d x L (mm)			3533			Code
2.8/3.1 x 64	H BK		●	3,000	324,000	73 5191
2.8/3.1 x 75	H BK		●	2,000	216,000	73 5192
2.8/3.1 x 80	H BK		●	2,000	216,000	73 5193
2.8/3.1 x 64	H GALV		●	3,000	324,000	73 5194
2.8/3.1 x 75	H GALV		●	2,000	216,000	73 5195
2.8/3.1 x 80	H GALV		●	2,000	216,000	73 5196

Ring-shank nails are special nails according to DIN 1052 Part 2, load carrying class III. Classification certificate available on request. They have a high extraction value because of the grooved shank and they are therefore ideal for use in structural timberwork.

Smooth-shank nail strips - 34°
D-Kopf

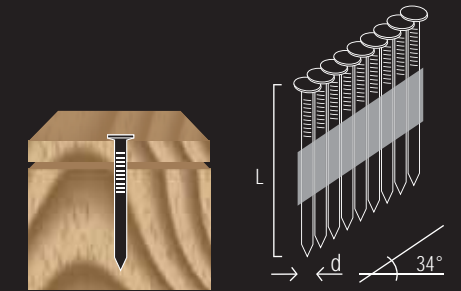

Ring-shank nail strips - 34° D-Kopf

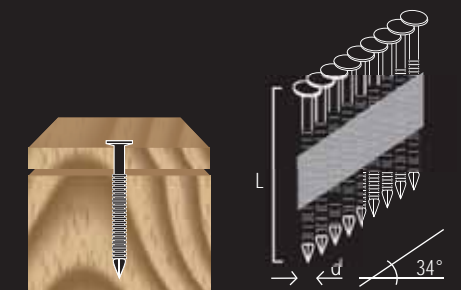

Nailer for corrugated fasteners
3445 pro



With short driver.



Accessories	
Suspension	31 7802

Nailer for corrugated fasteners
3446 pro



With longer driver to completely embed the corrugated fasteners in the corner.




Accessories	
Suspension	31 7802

Nailer for corrugated fasteners
3447 pro




Accessories	
Suspension	71 3287

L (mm)	B (mm)	3445	3446	3447			Code
9	25	•	•		1.000	6.000	70 9395
12	25	•	•		1.000	6.000	70 9409
15	25	•	•		1.000	6.000	70 9417
25	35			•	1.920	163.200	73 2954


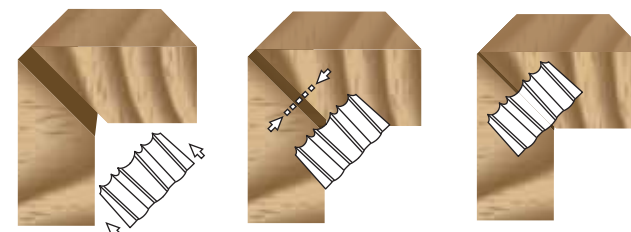


For butted connections. For fixing corner connections and butt-jointed wooden connections. Possible to drive into corners - not completely countersunk; extremely high retention force.

Corrugated fasteners




Length of corrug. fastener (mm)	9/12/15	9/12/15	25
Height of corrug. fastener (mm)	2,5	2,5	3,0
Width of corrug. fastener (mm)	25	25	35
Type	3445	3446	3447
Dimensions: height/length (mm)	265/320	265/320	315/415
Weight (kg) (without fasteners)	2,1	2,1	3,2
Air consumption (l/shot)	1,6	1,6	2,6
Magazine capacity, no. of fasteners	95	95	80
Penetration depth setting			
Code	-	-	-
Contact actuation	3445 0010	3446 0010	3447 0010
Single sequential actuation			

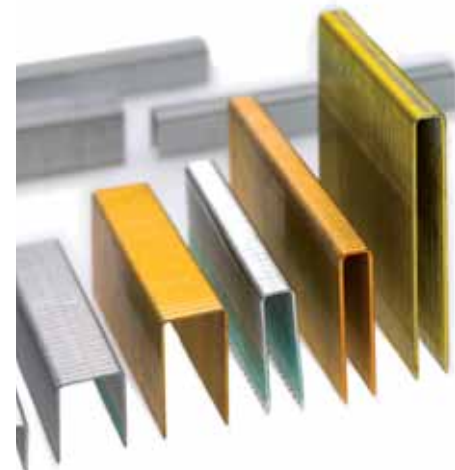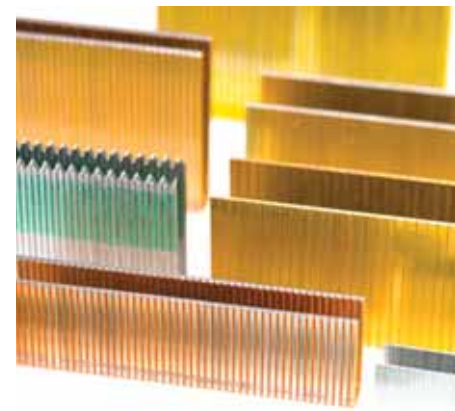

Stapler 3408 pro



Stapler 3404 Pro

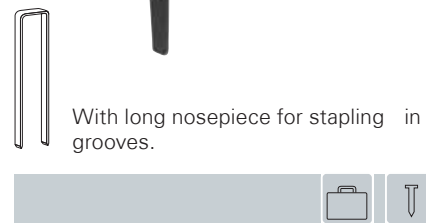

Stapler 3407 pro



Stapler 3417 Pro



Stapler 3482 pro



Stapler 3481 pro



Stapler 3425 pro



Accessories
Suspension 31 7802



Flat-wire stapler 3430 pro




Accessories
Suspension 31 7802




Staple type and length (mm)	M 4 - 16	A 6 - 16	K 6 - 16	K 10 - 25
Wire thickness (mm)	0,85 x 0,75	0,5 x 1,27	0,65 x 0,95	0,65 x 0,95
Width (mm)	9,1	12,5	12,85	12,85
Staple with chisel tip	•	•	•	•
Staple with saw tip				
Staple w. special tip (e.g. Fermacell panels)				
Type	3408	3407	3404	3417
Dimensions: height/length (mm)	155/225	145/215	200/240	174/250
Weight (kg) (without fasteners)	0,7	1,0	1,0	1,2
Air consumption (l/shot)	0,27	0,25	0,25	0,8
Magazine capacity, no. of fasteners	100	130	100	100
Penetration depth setting				•
Code	-	-	-	3417 0000
Contact actuation	3408 0010	3407 0010	3404 0010	-
Single sequential actuation	-	-	-	-
Singel/contact: switchable	-	-	-	-

Staple type and length (mm)	K 6 - 16	C 13 - 40	G 16 - 41	F 12 - 41
Wire thickness (mm)	0,65 x 0,95	1,05 x 1,27	1,4 x 1,65	1,0 x 2,5
Width (mm)	12,85	5,85	11,7	20,5
Staple with chisel tip	•	•	•	•
Staple with saw tip			•	
Staple w. special tip (e.g. Fermacell panels)			•	
Type	3482	3481	3425	3430
Dimensions: height/length (mm)	160/217	243/231	265/265	250/400
Weight (kg) (without fasteners)	0,9	1,2	2,0	2,3
Air consumption (l/shot)	0,34	0,75	1,6	1,6
Magazine capacity, no. of fasteners	120	100	150	120
Penetration depth setting		•	•	•
Code	-	-	3425 0000	3430 0000
Contact actuation	3482 0010	-	3425 0010	3430 0010
Single sequential actuation	-	3481 0000	-	-
Singel/contact: switchable	-	-	-	-

Stapler 3426 pro



Stapler 3475 pro



Ideal for fastening of rigid heat insulation made from natural wood fibre. For example Gutex® Thermowal, Gutex® Multiplex-top, Steico® Universal



Accessories
Suspension 73 4894


Staple type and length (mm)	G 25 - 50	BS 65 - 150
Wire thickness (mm)	1,4 x 1,65	2,0
Width (mm)	11,7	27,0
Staple with chisel tip	•	•
Staple with saw tip	•	
Staple w. special tip (e.g. Fermacell panels)	•	
Type	3426	3475
Dimensions: height/length (mm)	280/345	450/380
Weight (kg) (without fasteners)	2,2	6,48
Air consumption (l/shot)	2,7	4,3
Magazine capacity, no. of fasteners	140	102
Penetration depth setting	•	•
Code	Contact actuation Single sequential actuation Singel/contact: switchable	- 3475 0010 -

Stapler 3727 eco



Staple type and length (mm)	Q 32 - 65	C 12 - 41	L 6 - 10	L 8 - 14
Wire thickness (mm)	1,7 x 1,9	1,05 x 1,27	0,5 x 1,25	0,5 x 1,25
Width (mm)	11,1	5,85	10,6	10,6
Plastic cap Ø (mm)		25		
Staple with chisel tip	•	•	•	•
Staple with saw tip				
Staple w. special tip (e.g. Fermacell panels)				
Type	3727	3710	HT-K	HT-G
Dimensions: height/length (mm)	238/365	285/260	55/300	85/300
Weight (kg) (without fasteners)	2,52	5,0	0,87	1,04
Air consumption (l/shot)	1,9	0,85	-	-
Magazine capacity, no. of fasteners	130	100	160	160
Penetration depth setting	•	•		
Code	Contact actuation Single sequential actuation Singel/contact: switchable	- 3710 0000 -	- 73 5347 -	- 73 5322 -

Cap stapler 3710 eco



Ideal for fastening foils, insulation material of all kinds, cartons, cardboard etc. to wood.



Accessories
Grey plastic caps, pack of 3.000 pcs. 73 5633
Transparent plastic caps, pack of 3.000 pcs. 73 5634

Hammer stapler HT-K eco




Hammer stapler HT-G eco



Staple type and length (mm)	Q 32 - 65	C 12 - 41	L 6 - 10	L 8 - 14
Wire thickness (mm)	1,7 x 1,9	1,05 x 1,27	0,5 x 1,25	0,5 x 1,25
Width (mm)	11,1	5,85	10,6	10,6
Plastic cap Ø (mm)		25		
Staple with chisel tip	•	•	•	•
Staple with saw tip				
Staple w. special tip (e.g. Fermacell panels)				
Type	3727	3710	HT-K	HT-G
Dimensions: height/length (mm)	238/365	285/260	55/300	85/300
Weight (kg) (without fasteners)	2,52	5,0	0,87	1,04
Air consumption (l/shot)	1,9	0,85	-	-
Magazine capacity, no. of fasteners	130	100	160	160
Penetration depth setting	•	•		
Code	Contact actuation Single sequential actuation Singel/contact: switchable	- 3710 0000 -	- 73 5347 -	- 73 5322 -


Staples M - chisel tip

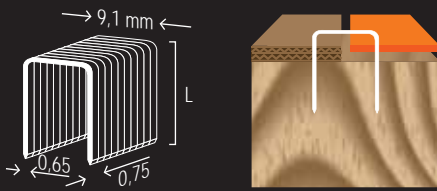

Ideal for fastening upholstery, cloth and wall coverings.

L (mm)	3408					Code
4	CP	GALV	•	10.000	200.000	73 7120
5	CP	GALV	•	10.000	200.000	73 7121
6	CP	GALV	•	10.000	200.000	73 7122
8	CP	GALV	•	10.000	200.000	73 7123
10	CP	GALV	•	10.000	200.000	73 7124
12	CP	GALV	•	10.000	200.000	73 7125
14	CP	GALV	•	10.000	200.000	73 7126
16	CP	GALV	•	10.000	200.000	73 7127
4	CP	A2	▲	10.000	200.000	73 7128
5	CP	A2	▲	10.000	200.000	73 7129
6	CP	A2	▲	10.000	200.000	73 7130
8	CP	A2	▲	10.000	200.000	73 7131
10	CP	A2	▲	10.000	200.000	73 7132
12	CP	A2	▲	10.000	200.000	73 7133
14	CP	A2	▲	10.000	200.000	73 7134
16	CP	A2	▲	10.000	200.000	73 7135


Staples A - chisel tip

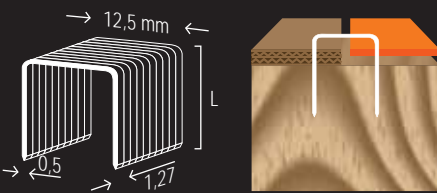

Ideal for fastening cardboard, insulation foil, upholstery, cloth and wall coverings.

L (mm)	3407					Code
6	CP	GALV	•	5.000	100.000	66 1082
8	CP	GALV	•	5.000	100.000	66 1090
10	CP	GALV	•	5.000	100.000	66 1104
12	CP	GALV	•	5.000	100.000	66 1112
14	CP	GALV	•	5.000	100.000	66 1120
16	CP	GALV	•	5.000	80.000	66 1139

Staples K - chisel tip

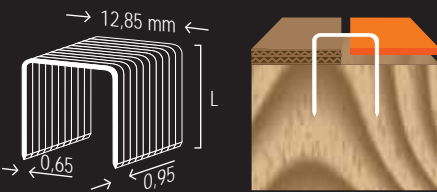

Ideal for fastening cardboard, insulation foil, upholstery, cloth and wall coverings.


L (mm)	3482			3404		3417				Code
6	CP	GALV	•	•	•	10.000	100.000	73 3032		
8	CP	GALV	•	•	•	10.000	100.000	73 3033		
10	CP	GALV	•	•	•	10.000	100.000	73 3034		
12	CP	GALV	•	•	•	10.000	100.000	73 3035		
14	CP	GALV	•	•	•	10.000	100.000	73 3036		
16	CP	GALV	•	•	•	10.000	100.000	73 3037		
18	CP	GALV	•	•	•	5.000	50.000	73 6710		
20	CP	GALV	•	•	•	5.000	50.000	73 6711		
22	CP	GALV	•	•	•	5.000	50.000	73 6712		
25	CP	GALV	•	•	•	5.000	50.000	73 6713		
10	CP	A2	▲	•	•	10.000	240.000	73 3055		
12	CP	A2	▲	•	•	10.000	100.000	73 3056		
14	CP	A2	▲	•	•	10.000	180.000	73 3040		
16	CP	A2	▲	•	•	10.000	160.000	73 3041		

L (mm)	3481				3710		3489		3739				Code
12	CP	GALV	•	•	•	•	5.000	60.000	51 3989				
16	CP	GALV	•	•	•	•	5.000	50.000	21 0773				
19	CP	GALV	•	•	•	•	5.000	50.000	21 0781				
22	CP	GALV	•	•	•	•	5.000	40.000	21 0803				
25	CP	GALV	•	•	•	•	5.000	40.000	21 0811				
29	CP	GALV	•	•	•	•	5.000	20.000	21 0838				
32	CP	H GALV	•	•	•	•	5.000	20.000	21 0846				
38	CP	H GALV	•	•	•	•	5.000	20.000	21 0854				
41	CP	H GALV	•	•	•	•	5.000	20.000	21 0862				
22	CP	A2	▲	•	•	•	5.000	40.000	70 3028				
32	CP	H A2	▲	•	•	•	5.000	20.000	73 1563				
41	CP	H A2	▲	•	•	•	5.000	20.000	73 1564				

L (mm)	3727			3718				Code
45	CP	GALV	Z	•	•	5.000	625.000	73 6718
50	CP	GALV	Z	•	•	5.000	600.000	73 6719
55	CP	GALV	Z	•	•	5.000	475.000	73 6720
63	CP	GALV	Z	•	•	2.500	380.000	73 6721
50	CP	A2	▲ Z	•	•	5.000	600.000	73 6722
63	CP	A2	▲ Z	•	•	2.500	475.000	73 6723


L (mm)	3430					Code
12	CP	GALV	•	8.100		55 8052
16	CP	GALV	•	6.000		55 8060
19	CP	GALV	•	5.100		55 8079
22	CP	GALV	•	4.200		55 8087
25	CP	GALV	•	3.900		55 8095
32	CP	H GALV	•	3.000		55 8117
38	CP	H GALV	•	2.400		55 8133
41	CP	H GALV	•	2.400		55 8141

Staples C - chisel tip

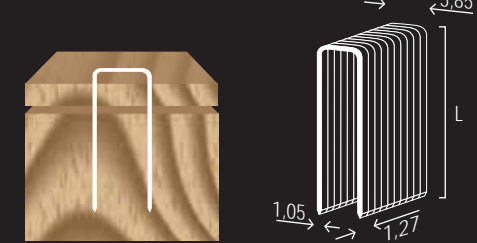


REICH C staples (29 + 32 mm) are in accordance with the requirements of DIN 18 182 part 3. These staples can be used for fastening plasterboard and plasterboard fibre boards.

Staples Q - chisel tip

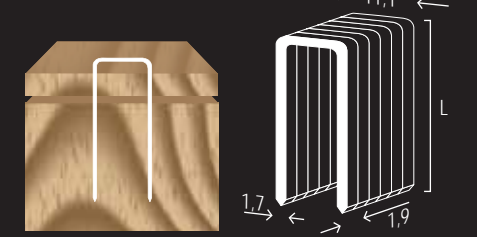


For fixings which are subject to long-term extraction load. According to DIN 1052 Part 2, staples which are german building supervision licensed. Certificate is available on request.


Flat wire staples F - chisel tip

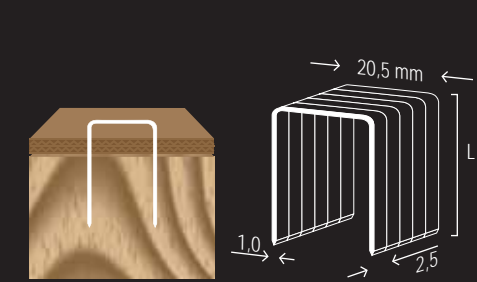


Ideal for the fixing of cardboard boxes to pallets, cardboard box processing. Where mainly thin, easily torn materials are to be fixed.

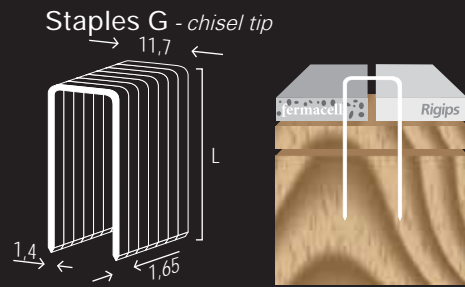

For fixings which are subject to long-term extraction load we supply staples from 32 mm according to DIN 1052 Part 2, german building supervision licensed. Certificate is available on request. According to DIN 18 182 Part 2 suitable for fixing plasterboard panels.

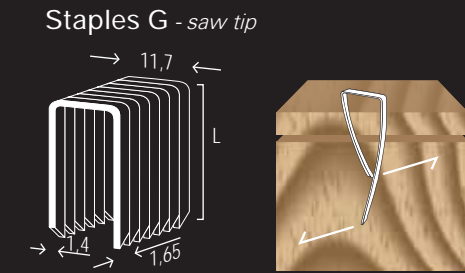

How the staple with saw tip works: Increased extraction values by running off-centre.

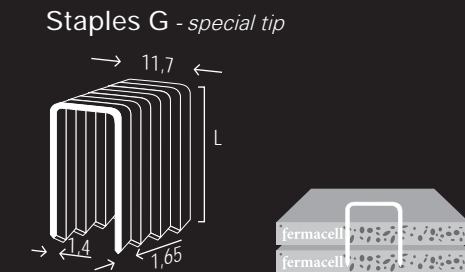

Special tip for fixing Fermacell to Fermacell panels, for example.

L (mm)				3426	3418	3718			Code
16	CP	GALV					5.000		73 3093
25	CP	GALV		•			5.000	900.000	21 0617
29	CP	GALV		•			5.000	750.000	21 0625
32	CP	H GALV	Z	•	•	•	5.000	750.000	71 9633
35	CP	H GALV	Z	•	•	•	5.000	750.000	71 9641
38	CP	H GALV	Z	•	•	•	5.000	750.000	71 9668
41	CP	H GALV	Z	•	•	•	5.000	625.000	71 9676
45	CP	H GALV	Z	•	•	•	5.000	625.000	71 9595
50	CP	H GALV	Z	•	•	•	5.000	600.000	71 9609
57	CP	H GALV	Z	•	•	•	5.000	500.000	71 9617
64	CP	H GALV	Z	•	•	•	5.000	500.000	71 9625
45	CP	H A2	Z	•	•	•	5.000	625.000	39 5595
50	CP	H A2	Z	•	•	•	5.000	600.000	73 4981
64	CP	H A2	Z	•	•	•	5.000	500.000	71 6804


L (mm)				3426	3418	3718			Code
29	DP	GALV		•			5.000		69 6110
32	DP	H GALV		•	•	•	5.000		40 6961
35	DP	H GALV		•	•	•	5.000		39 5110
38	DP	H GALV		•	•	•	5.000		38 6375
41	DP	H GALV		•	•	•	5.000		38 6383
44	DP	H GALV		•	•	•	5.000		38 6391
51	DP	H GALV		•	•	•	5.000		38 6405

L (mm)				3426	3418	3718			Code
25	FP	H GALV		•			5.000		70 9662
32	FP	H GALV		•	•	•	5.000		70 5004
38	FP	H GALV		•	•	•	5.000		70 5012


L (mm)					3418			Code
45	CP	H GALV	Z	•		5.000	625.000	50 6427
50	CP	H GALV	Z	•		5.000	600.000	50 6451
57	CP	H GALV	Z	•		5.000	500.000	50 6494
64	CP	H GALV	Z	•		5.000	500.000	50 6524
45	CP	H A4	Z	•		5.000	625.000	71 7339
50	CP	H A4	Z	•		5.000	600.000	71 5808
57	CP	H A4	Z	•		5.000	500.000	71 5816
64	CP	H A4	Z	•		5.000	500.000	71 5824

L (mm)					3475			Code
75	CP	H GALV		•		2.160	103.680	73 5312
80	CP	H GALV		•		1.920	92.000	73 7110
100	CP	H GALV		•		1.600	76.800	73 5313
110	CP	H GALV		•		1.600	76.800	73 7111
130	CP	H GALV		•		1.280	61.440	73 5314
150	CP	H GALV		•		960	46.080	73 5315
75	CP	H A2		•		2.160	103.680	73 5316
100	CP	H A2		•		1.600	76.800	73 5317
110	CP	H A2		•		1.600	76.800	73 5318
130	CP	H A2		•		1.280	61.440	73 5319
150	CP	H A2		•		960	46.080	73 5320


L (mm)				HT-K	HT-G			Code
6	CP	GALV		•		5.000	100.000	73 5348
8	CP	GALV		•	•	5.000	100.000	73 5337
10	CP	GALV		•	•	5.000	100.000	73 5338
12	CP	GALV		•	•	5.000	100.000	73 5339
14	CP	GALV		•	•	5.000	100.000	73 5340

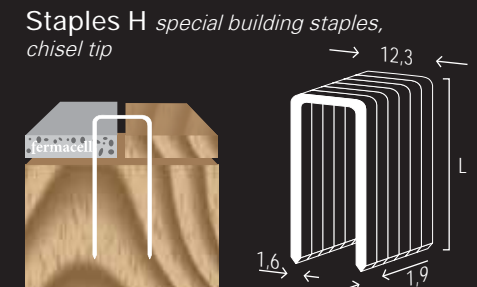

For fixings which are subject to long-term extraction load. According to DIN 1052 Part 2, staples which are german building supervision licensed. Certificate is available on request.

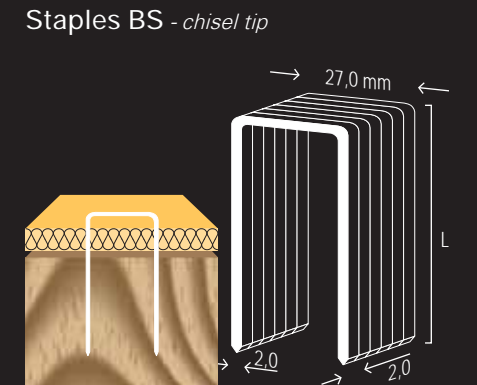


For professional fastening of rigid heat insulation made from natural wood fibre and multilayer composite panels. For example Gutex® Thermowal, Gutex® Multiplex-top, Steico® Universal.

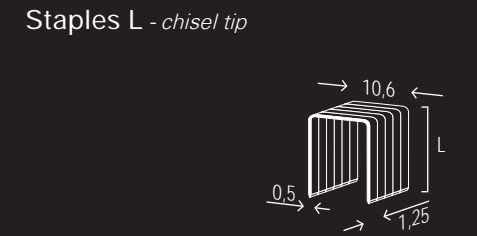

Staples L - chisel tip

Combination nailer 3489 pro




Combination tool for staples and mini brads.



Fasteners	
Staples, see page	27
Mini brads, see page	36



Combination nailer 3418 pro



A real combination tool for staples, T-nails and finishing nails.



Accessories	
Piston for finishing nails	73 0137
Base for weather boarding	73 3023
Suspension	71 3287



Base for weather boarding 3418



The staple is driven into the tongue at an angle so that it within the solid wood. The penetration spot is covered by the face of the next groove. Code no. 73 3023.



Fasteners	
Staples, see page	28-29
T-nails, finishing nails, see page	37



Combination nailer 3739 eco




Thanks to the kerfed safety yoke, particularly suitable for tongue and groove boards, Früh and Bierbach claws.




Fasteners	
Staples, see page	27
Mini brads, see page	36



Combination nailer 3718 eco





Fasteners	
Staples, see page	27-28
T-nails, see page	37

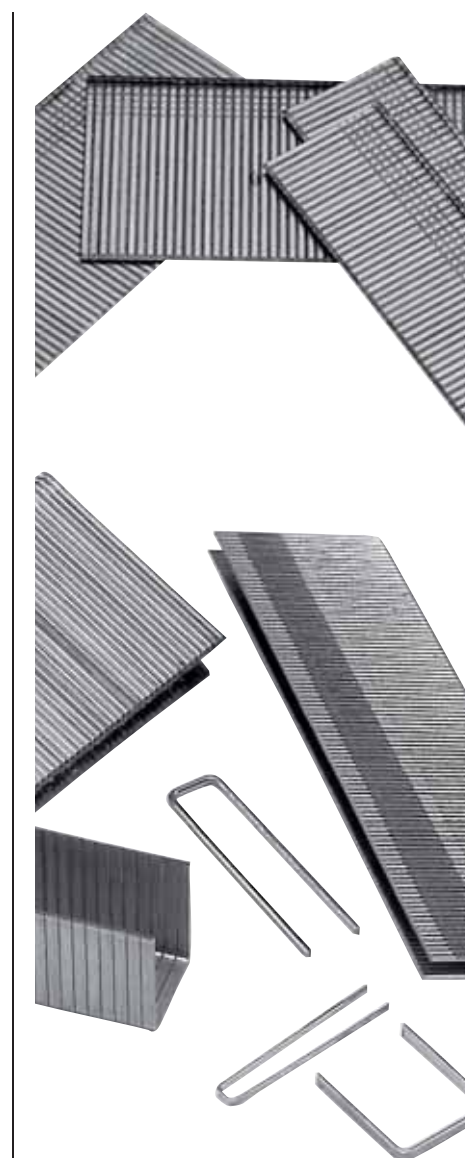

Brad nail length (mm)	16 - 50	-
T-nail length (mm)	-	32 - 65
Finishing nail length (mm)	-	32 - 60
Wire thickness - nail (mm)	1,0 x 1,25	2,2
Staple type and length (mm)	C 12 - 41	G 32 - 64 / H 44 - 64
Wire thickness - staple (mm)	1,05 x 1,27	G 1,6 / H 1,8
Staple width (mm)	5,85	G 11,7 / H 12,3
Staple with chisel tip	•	•
Staple with saw tip		•
Staple with special tip for Fermacell panels		•
Type	3489	3418
Dimensions: height/length (mm)	256/282	320/320
Weight (kg) (without fasteners)	1,2	3,3
Air consumption (l/shot)	0,85	2,6
Magazine capacity, no. of fasteners	100	2 x 45
Penetration depth setting	•	•
Code	Contact actuation Single sequential actuation Singel/contact: switchable	3418 0001 3418 0011 -

Brad nail length (mm)	16 - 50	-
T-nail length (mm)	-	32 - 65
Wire thickness - nail (mm)	1,0 x 1,25	2,2
Staple type and length (mm)	C 12 - 41	Q / G 32 - 64
Wire thickness - staple (mm)	1,05 x 1,27	Q 2,2 / G 1,4 x 1,65
Staple width (mm)	5,85	Q 11,1 / G 11,7
Staple with chisel tip	•	•
Staple with saw tip		•
Staple with special tip for Fermacell panels		•
Type	3739	3718
Dimensions: height/length (mm)	235/250	330/375
Weight (kg) (without fasteners)	1,4	2,95
Air consumption (l/shot)	0,5	1,6
Magazine capacity, no. of fasteners	100	100 /150
Penetration depth setting	•	•
Code	Contact actuation Single sequential actuation Singel/contact: switchable	3739 0000 3739 0010 -

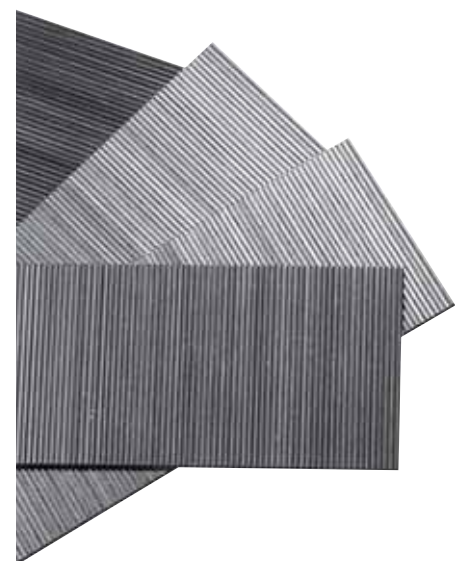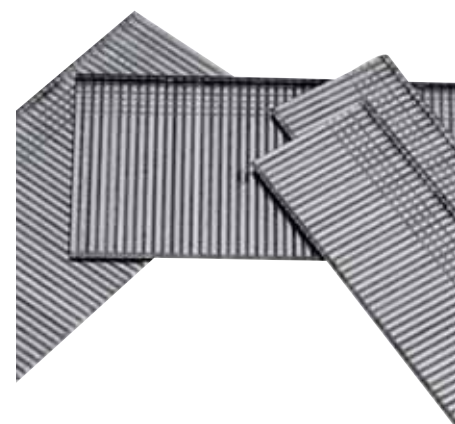

Pin nailer 3438 pro



Pin nailer 3485 pro




Mini brad nailer 3486 pro




Mini brad nailer 3483 pro



Brad nailer 3487 pro

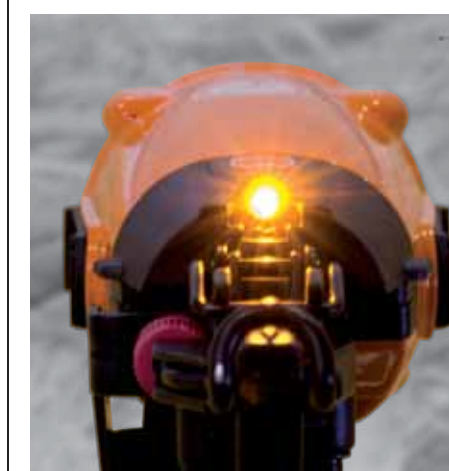

DA Brad nailer 3484 pro

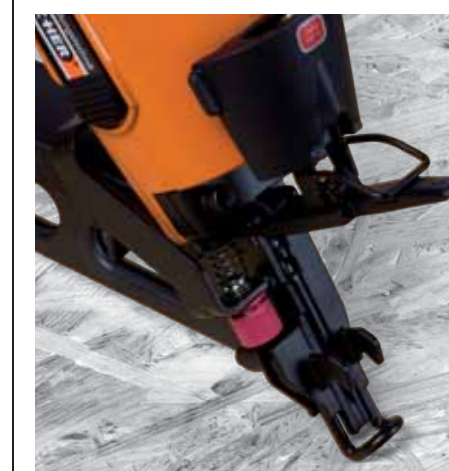

Brads length (mm)	12- 25	25- 50	15 - 35
Wire thickness (mm)	0,65	0,65	1,0 x 1,25
Pins	•	•	
Mini brads			•
Brads			
DA Brads			
Type	3438	3485	3486
Dimensions: height/length (mm)	150/240	243/256	222/240
Weight (kg) (without fasteners)	0,9	1,2	1,0
Air consumption (l/shot)	0,3	0,76	0,70
Magazine capacity, no. of fasteners	100	115	100
Penetration depth setting			•
Code	Contact actuation 3438 0010 Single sequential actuation -	- 3485 0010 -	- 3486 0000 -

Brads length (mm)	15 - 55	19 - 64	25 - 64
Wire thickness (mm)	1,0 x 1,25	1,6	1,8
Pins			
Mini brads	•		
Brads		•	
DA Brads			•
Type	3483	3487	3484
Dimensions: height/length (mm)	255/244	297/274	308/322
Weight (kg) (without fasteners)	1,2	1,7	1,83
Air consumption (l/shot)	0,85	0,88	1,4
Magazine capacity, no. of fasteners	105		110
Penetration depth setting	•	•	•
Code	Contact actuation 3483 0000 Single sequential actuation -	- 3487 0000 -	- 3484 0000 -

Pin nailer 3716 eco



Brad nailer 3704 eco



Window framing nailer 3719 eco



Ideal for manufacturing windows and doors. Especially for the direct and invisible fixing of sloped and straight glass strips into the sealing rebate.

Micro brad nailer 3712 eco



DA Brad nailer 3737 eco



Accessories
Suspension 31 7802



Palm nailer 3711 eco



Ideal for loose standard nails and rod dowels up to a head diameter of 22 (mm). Ideal for nailing perforated plates and girder shoes; for spots that are difficult to reach, e.g. corners. Simple handling thanks to magnetic nail holding.



Accessories
Large sleeve for anchoring nails 73 5668
Large guide sleeve for nails up to head Ø 22 mm 73 5299



Combi-package... to get going immediately !



Package
Mini-brad nailer 3704 for 1.2 (mm) brads from 15 to 50 (mm).
code no. 3704 0000.


Compressor REICH C 180 M .
code no. 73 5095.

10 m hose with coupling.
code no. 73 5096.

Brads length (mm)	12 - 30	15 - 30	15 - 50	25 - 40	32 - 64
Wire thickness (mm)	0,65	0,8	1,0 x 1,25	1,0 x 1,25	1,8
Pins	•				
Micro brads		•			
Brads			•	•	
DA Brads					•
Type	3716	3712	3704	3719	3737
Dimensions: height/length (mm)	190/250	189/181	228/243	230/300	315/345
Weight (kg) (without fasteners)	0,9	1,69	2,3	1,28	2,7
Air consumption (l/shot)	0,4	0,8	1,02	0,34	1,4
Magazine capacity, no. of fasteners	120	120	100	100	120
Penetration depth setting				•	•
Code	Contact actuation 3716 0010 Single sequential actuation - Singel/contact: switchable	- 3712 0010 -	- - 3704 0000	- 3719 0010 -	3737 0000 3737 0010 -

Nails length (mm)	all lengths
Head Ø (mm)	up to 22
Type	3711
Dimensions, height/length (mm)	130/120
Weight (kg) (without fasteners)	2,5
Magazine capacity, No. of fasteners	-
Penetration depth setting	
Code	3711 0000


Pins, 23 Gauge




L (mm)		3438	3485	3716			Code
12	BR	•		•	20.000	540.000	73 3042
15	BR	•		•	20.000	540.000	73 3043
18	BR	•		•	20.000	540.000	73 3044
20	BR	•		•	10.000	270.000	73 3045
22	BR	•		•	10.000	270.000	73 3058
25	BR	•	•	•	10.000	270.000	73 3046
30	BR		•	•	10.000	270.000	73 6078

L (mm)		3484	3737			Code
25	GALV	•	•	4.000	16.000	73 5116
32	GALV	•	•	4.000	16.000	71 7576
38	GALV	•	•	4.000	16.000	71 7584
44	GALV	•	•	4.000	16.000	71 7592
50	GALV	•	•	4.000	16.000	71 7606
56	GALV	•	•	4.000	16.000	71 7614
64	GALV	•	•	4.000	16.000	71 7622
38	A2	•	•	4.000	16.000	71 9684
50	A2	•	•	4.000	16.000	71 9692
56	A2	•	•	4.000	16.000	71 9706
64	A2	•	•	4.000	16.000	71 9714

DA Brads, 15 Gauge




Micro brads, 21 Gauge




L (mm)		3712			Code
15	BR	•	18.000		73 5162
20	BR	•	18.000		73 5163
25	BR	•	18.000		73 5164
30	BR	•	9.000		73 5165

L (mm)		3418			Code
32	ALU	•	10.000		47 3650
38	ALU	•	10.000		47 3669
50	ALU	•	10.000		47 3685
60	ALU	•	10.000		51 4411

Finishing nails




Mini brads, 18 Gauge




L (mm)		3486	3483	3704	3719	3489	3739			Code
16	GALV	•	•	•		•	•	5.000	100.000	66 1481
19	GALV	•	•	•		•	•	5.000	100.000	66 1503
25	GALV	•	•	•	•	•	•	5.000	100.000	66 1511
30	GALV	•	•	•	•	•	•	5.000	100.000	66 1538
32	GALV	•	•	•	•	•	•	5.000	60.000	66 1546
35	GALV	•	•	•	•	•	•	5.000	60.000	66 1554
38	GALV	•	•	•	•	•	•	5.000	60.000	66 1562
40	GALV	•	•	•	•	•	•	5.000	60.000	66 1570
45	GALV	•	•	•		•	•	5.000	60.000	73 3063
50	GALV	•	•	•		•	•	5.000	60.000	73 3064
25	A2	•	•	•	•	•	•	5.000	100.000	73 3065
32	A2	•	•	•	•	•	•	5.000	60.000	63 1191
40	A2	•	•	•	•	•	•	5.000	60.000	63 1205
50	A2	•	•	•		•	•	5.000	60.000	73 3066

L (mm)		3418	3718			Code
32	GALV	•	•	20.000		21 1184
38	GALV	•	•	10.000		21 1192
45	GALV	•	•	10.000		21 1206
50	GALV	•	•	10.000		21 1214
55	GALV	•	•	10.000		21 1222
65	GALV	•	•	10.000		21 1230

T-nails



Brads, 16 Gauge



L (mm)		3487			Code
19	GALV	•	5.000	60.000	73 5097
25	GALV	•	5.000	60.000	73 5098
32	GALV	•	2.500	30.000	73 5099
38	GALV	•	2.500	30.000	73 5136
40	GALV	•	2.500	30.000	73 5100
50	GALV	•	2.500	30.000	73 5101
57	GALV	•	2.500	30.000	73 5102
64	GALV	•	2.500	20.000	73 5103
40	A2	•	2.500	30.000	73 5104
50	A2	•	2.500	20.000	73 5105
64	A2	•	2.500	20.000	73 5106

Compressor C 180 M *eco*



Lightweight handy compressor, suitable for a wide range of uses and easy to transport. Oil-free, with rubber bases, infinitely adjustable pressure control.



Compressor C 285 P *eco*



Designed specifically for mobile use on building sites and in interior extensions. Stable, powerful construction. User-friendly controls.




Compressor C 402 P *eco*



Compressor C 265 S *eco*




Motor	230V, 1,1 kW	230V, 1,5 kW	230V, 1,8 kW	230V, 2,2 kW
Power consumption (W)	1100	1500	1800	2200
Speed (U/min)	2850/min.	2850/min.	2850/min.	2850/min.
Intake volume (l/min.)	179	217	246	400
Output volume (l/min.)	55	130	150	220
Max. pressure (bar)	8	10	10	10
Container (l)	6	3	20	20
Type	C 180 M	C 265 S	C 285 P	C 402 P
Dimensions (cm)	34 x 26 x 52	53 x 30 x 37	42 x 40 x 76	45 x 42 x 80
Weight (kg)	14	21	30	42
Code no.	73 5095	73 6288	73 6290	73 6291

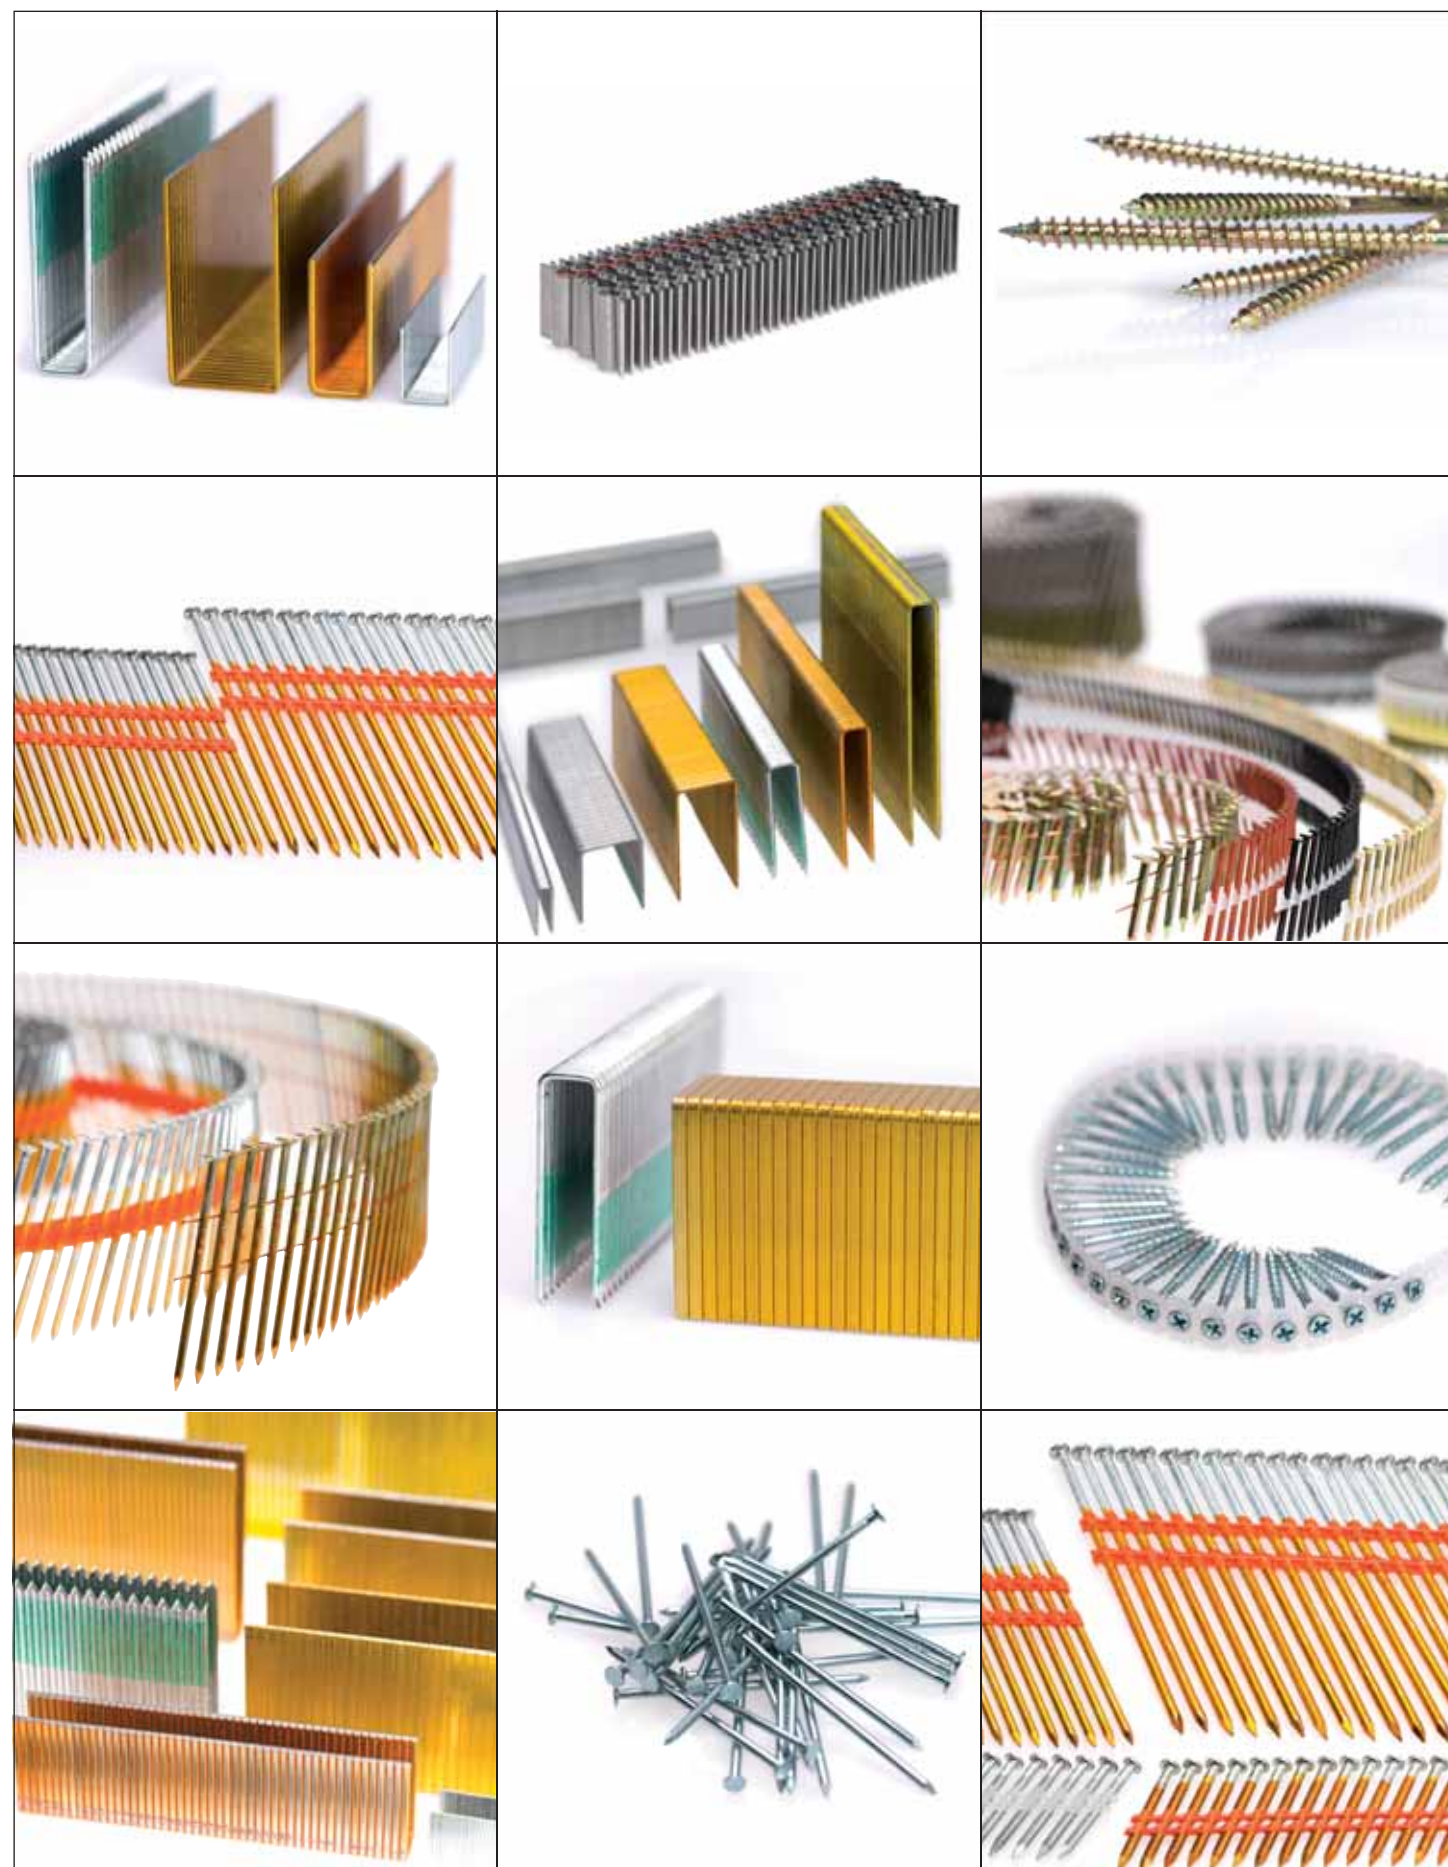

Coil magazine screwdriver
3350 pro



All the tools required are attached safely to the housing.

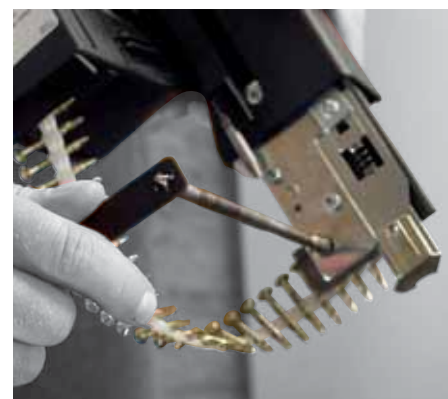


Accessories	
Extension	73 1696
Nosepiece, rubber coated	55 8656



Coil magazine screwdriver
3352/3362 pro



Large floor areas can be screwed comfortably using the extension. (Suitable for all coil magazine screwdriver types).

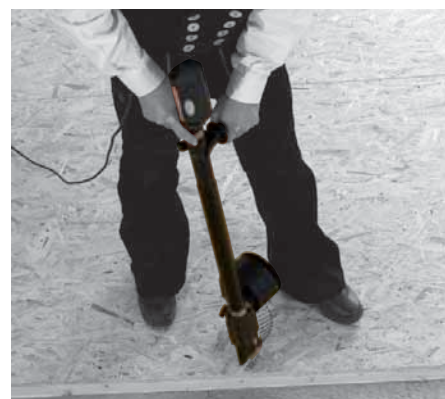

Accessories	
Extension	73 1696
Nosepiece, rubber coated	55 8656



Coil magazine screwdriver
3338 pro



Accessories	
Extension	73 1696
Conversion kit for screws Ø 3.5 - 4.2 / 35 - 80 mm	73 1714



Screw length (mm)	16 - 30	25 - 50	25 - 50
Screw Ø (mm)	3,5	3,5 - 4,2	3,5 - 4,2
Rated input (W)	750	750	750
No-load speed (rpm)	0 - 2850	0 - 2850	0 - 4000
Chipboard screw	•	•	
Drywall screws		•	•
Fermacell screw		•	•
Drywall screw - drill point		•	•
Wood screw - Hi-lo		•	•
Wing Teks screw		•	•
Type	3350	3352	3362
Weight (kg)	2,2	2,2	2,2
Length of cable (m)	4	4	4
Magazine capacity, no. of screws	167	167	167
Penetration depth setting	•	•	•
Code	3350 0001	3352 0001	3362 0001

Strip screwdriver 3354/3364 pro



High speed for strip collated Drywall screws.




Screw length (mm)	40 - 80	25 - 55	25 - 55
Screw Ø (mm)	4,5 - 5	3,5 - 3,9	3,5 - 3,9
Rated input (W)	750	750	750
No-load speed (rpm)	0 - 2850	0 - 2850	0 - 4000
Chipboard screw	•		
Drywall screws	•	•	•
Fermacell screw	•	•	•
Drywall screw - drill point	•		
Wood screw - Hi-lo	•		
Wing Teks screw	•		
Type	3338	3354	3364
Weight (kg)	2,9	2,2	2,2
Length of cable (m)	4	4	4
Magazine capacity, no. of screws	125	50	50
Penetration depth setting	•	•	•
Code	3338 0001	3354 0000	3364 0000

	3333/50	3352	3362	3338	3354/64	3357	Code
Mandrel							
M5						○	73 3609
M5	○	○					69 9667
M5			○				73 0113
M5				◆			73 1695
M5					○		73 6080
M6				○			64 1685
Bits, in packs of 5, with thread							
M5 Pozidrive - 2	○	○	●	●*			50 7319
M5 Pozidrive - 2					●		73 6265
M6 Pozidrive - 2				○			64 1732
M6 Pozidrive - 3				●			65 9437
M5 Phillips - 2	●	●	○				51 8329
M5 Phillips - 2					○		73 5523
M6 Phillips - 2				●			64 1759
M5 TX 10						○	73 5054
M5 TX 15	●	●					68 0355
M5 TX 20	●	○		●*			68 0347
M5 TX 25				●*			68 0339
M6 TX 20				○			68 1149
M6 TX 25				○			68 0312
M6 TX 30				●			68 0304

○ Supplied as standard ● Accessories ◆ Supplied as conversion kit (Ø 3.5/4.2 mm)
* Can be used with conversion kit (M5) mandrel


Drywall screws - fine thread

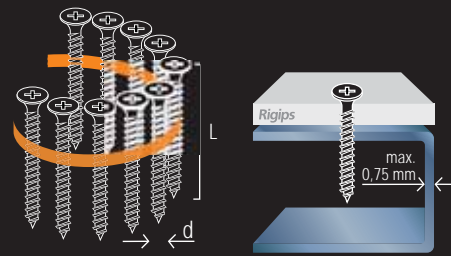

d x L (mm)	3318	3352	3362	3338			Code
PH 2 3,5 x 30 PHO	●	●	●		3.000	270.000	71 6073
PH 2 3,5 x 35 PHO	●	●	●	◦	2.000	200.000	71 6081
PH 2 3,5 x 45 PHO	●	●	●	◦	2.000	135.000	71 6103
PH 2 3,5 x 55 PHO			●	◦	3.000	135.000	71 6111
PH 2 4,0 x 30 PHO	●	●	●	◦	3.000	270.000	52 5324
PH 2 4,0 x 35 PHO	●	●	●	◦	2.000	200.000	51 1080
PH 2 4,0 x 45 PHO	●	●	●	◦	2.000	108.000	51 1099
PH 2 4,0 x 55 PHO				◦	1.000	90.000	53 3270

◦ for 3338 only with conversion kit 73 1714.
According to DIN 18 182 suitable for fixing plasterboard panels.


Drywall self-drilling screw - fine thread, drill point

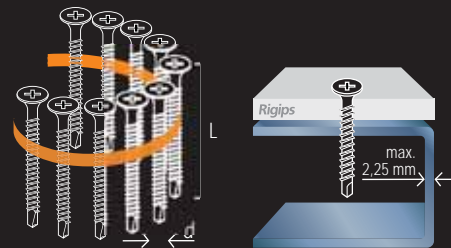

d x L (mm)	3318	3352	3362	3338			Code
PH 2 3,5 x 30 PHO BS	●	●	●		3.000	108.000	52 5340
PH 2 3,5 x 35 PHO BS	●	●	●	◦	2.000	108.000	51 1110
PH 2 3,5 x 45 PHO BS	●	●	●	◦	2.000	108.000	51 1129

◦ for 3338 only with conversion kit 73 1714.
According to DIN 18 182 suitable for fixing plasterboard panels.


Drywall screws - coarse thread

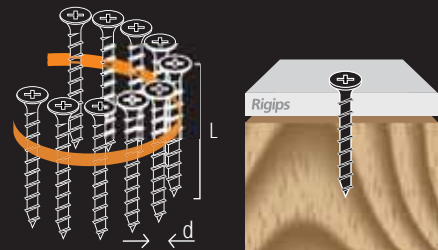

d x L (mm)	3362			Code
PH 2 4,0 x 30 PHO	●	3.000	270.000	73 5053

According to DIN 18 182 suitable for fixing plasterboard panels.


Drywall screws - fine thread

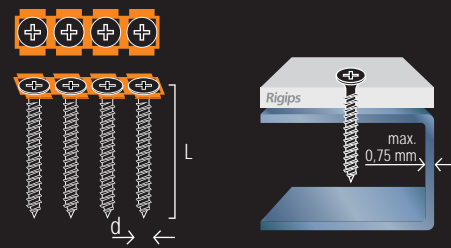

d x L (mm)	3354	3364			Code
PH 2 3,9 x 25 PHO	●	●	1.000	180.000	73 5614
PH 2 3,9 x 30 PHO	●	●	1.000	180.000	73 5504
PH 2 3,9 x 35 PHO	●	●	1.000	180.000	73 5505
PH 2 3,9 x 45 PHO	●	●	1.000	180.000	73 6741
PH 2 3,9 x 55 PHO	●	●	1.000	120.000	73 6742
PH 2 4,0 x 35 PHO	●	●	2.000	200.000	51 1080
PH 2 4,0 x 45 PHO	●	●	2.000	108.000	51 1099

According to DIN 18 182 suitable for fixing plasterboard panels.

Drywall screws - coarse thread

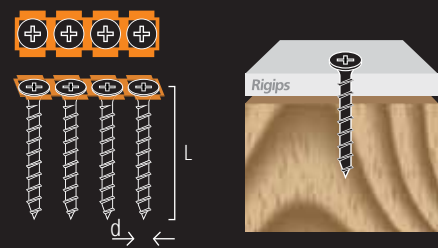

d x L (mm)	3354	3364			Code
PH 2 3,9 x 30 PHO	●	●	1.000	180.000	73 5506
PH 2 3,9 x 35 PHO	●	●	1.000	180.000	73 5507
PH 2 3,9 x 45 PHO	●	●	1.000	180.000	73 5508
PH 2 3,9 x 55 PHO	●	●	1.000	120.000	73 6743
PH 2 3,9 x 55 PHO	●	●	1.000	120.000	73 6742

According to DIN 18 182 suitable for fixing plasterboard panels.

d x L (mm)	3354	3364			Code
PH 2 3,9 x 30 PHO	●	●	1.000	180.000	73 5509
PH 2 3,9 x 35 PHO	●	●	1.000	180.000	73 5510

d x L (mm)	3318	3352	3362	3338			Code
PH 2 3,9 x 30 PHO	●	●	●		3.000	270.000	68 0419
PH 2 3,9 x 35 PHO	●	●	●	◦	2.000	200.000	73 3660
PH 2 3,9 x 40 PHO	●	●	●	◦	2.000	200.000	73 0052
PH 2 3,9 x 45 PHO	●	●	●	◦	1.000	108.000	39 5749


d x L (mm)	3318	3352	3338			Code
PH 2 4,2 x 32 GV BS	●	●		1.200	64.800	39 3673
PH 2 4,2 x 38 GV BS	●	●	◦	800	64.000	57 2543

Ideal for drilling through timber and then into metal (up to 6mm thick steel). The wings make an expansion hole in the wood. When the screw hits the metal profile, the wings break off. The metal thread „eats“ its way into the substructure and tensions the workpiece.


d x L (mm)	3333			Code
PH 2 4,2 x 13 GV BS	●	2.000	216.000	57 5941
PH 2 4,2 x 16 GV BS	●	2.000	216.000	57 5968

d x L (mm)	3357			Code
TX 10 3,5 x 45 GV BS	●	800	80.000	73 5011
TX 10 3,5 x 55 GV BS	●	800	64.000	73 5147


Fermacell screws (gypsum-fibresboard screws)

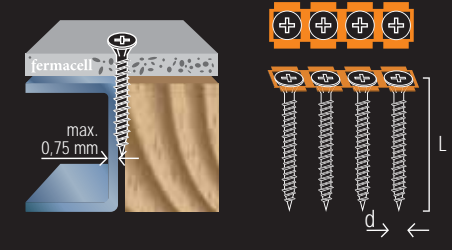


Fermacell screws (gypsum-fibresboard screws)

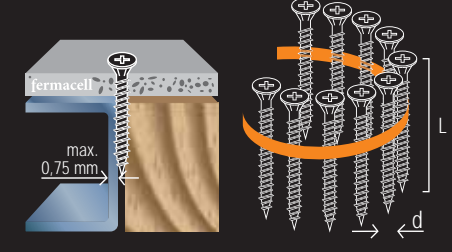


Self-drilling wing tecks screws drill point

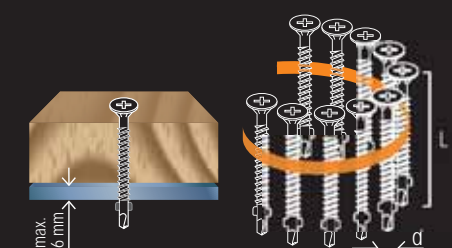


Self-tapping screws - pan head, drill point

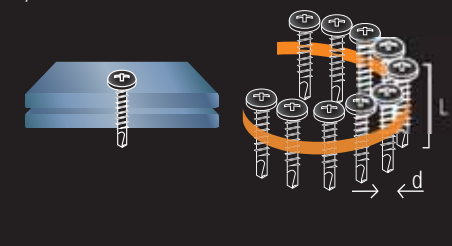

Flooring screw - drill point

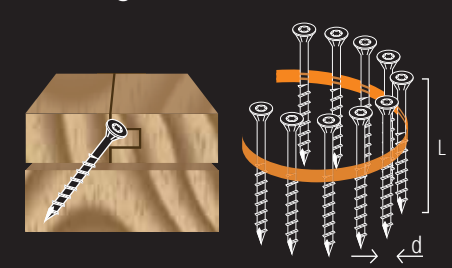


Chipboard screws

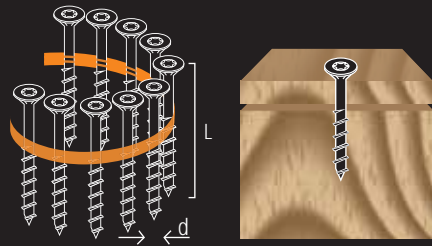


d x L (mm)	3318	3352	3338			Code
TX 20 4,0 x 25 GV Z	●	●		1.200	136.000	51 1021
TX 20 4,0 x 30 GV Z	●	●		1.200	96.000	51 1137
TX 20 4,0 x 35 GV Z	●	●	●°	1.200	96.000	51 1048
TX 20 4,0 x 40 GV Z	●	●	●°	800	64.000	51 1056
TX 20 4,0 x 45 GV Z	●	●	●°	800	64.000	51 1064
TX 20 4,0 x 50 GV Z	●	●	●°	800	64.000	72 3479
TX 20 4,0 x 60 GV Z			●°	800	64.000	71 3449
TX 20 4,0 x 65 GV Z			●°	500	62.000	73 4952
TX 20 4,5 x 50 GV Z			●	500	40.000	53 3165
TX 20 4,5 x 55 GV Z			●	500	40.000	53 3173
TX 20 5,0 x 60 GV Z			●	500	40.000	53 3246
TX 20 5,0 x 65 GV Z			●	500	31.000	53 3254
TX 20 5,0 x 70 GV Z			●	500	40.000	62 3385
TX 20 5,0 x 80 GV Z			●	500	40.000	39 5196
TX 20 4,0 x 30 A 2 Z	●	●		1.200	96.000	39 4785
TX 20 4,0 x 35 A 2 Z	●	●	●°	1.200	96.000	62 4152
TX 20 4,0 x 45 A 2 Z	●	●	●°	800	64.000	39 5374
TX 20 4,0 x 45 A 4 Z	●	●	●°	1.000	80.000	71 3414
TX 20 4,5 x 55 A 2 Z			●	500	40.000	39 5323
TX 20 5,0 x 60 A 2 Z			●	500	31.000	68 6042
TX 20 5,0 x 70 A 2 Z			●	500	31.000	62 8697
TX 20 5,0 x 80 A 2 Z			●	500	31.000	73 3651

d x L (mm)	3350			Code
PZ 2 3,5 x 16 GV Z	●	2.000	136.000	57 5923
PZ 2 3,5 x 20 GV Z	●	1.000	136.000	57 5925
PZ 2 3,5 x 25 GV Z	●	1.200	96.000	57 5933

Chipboard screws

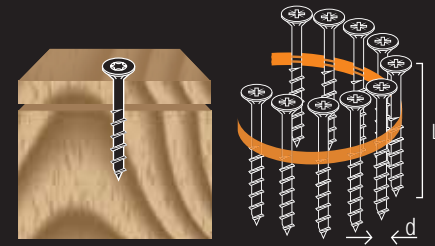


Chipboard screws

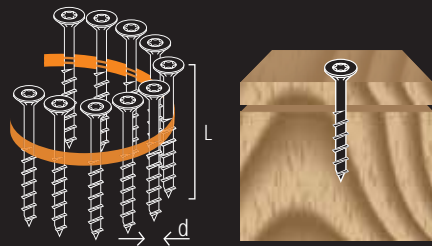


d x L (mm)	3318	3352	3338			Code
TX 20 4,0 x 30 GV	●	●		3.000	270.000	73 4670
TX 20 4,0 x 35 GV	●	●	●°	2.000	180.000	73 3584
TX 20 4,0 x 40 GV	●	●	●°	2.000	200.000	73 3585
TX 20 4,0 x 45 GV	●	●	●°	2.000	180.000	73 3586
TX 20 4,5 x 50 GV			●	1.500	135.000	73 3587
TX 20 4,5 x 55 GV			●	1.500	105.000	73 3588
TX 25 5,0 x 60 GV			●	1.250	125.000	73 3589
TX 25 5,0 x 65 GV			●	1.250	75.000	73 3590
TX 25 5,0 x 70 GV			●	625	62.500	73 4671
TX 25 5,0 x 80 GV			●	625	62.500	73 4672

d x L (mm)	3318	3352	3338			Code
PZ 2 4,2 x 25 GV	●	●		1.000	108.000	54 0439
PZ 2 4,2 x 35 GV	●	●	●°	2.000	108.000	68 8894
PZ 2 4,2 x 45 GV	●	●	●°	1.000	108.000	68 8908

Wood screws, Hi-lo double thread

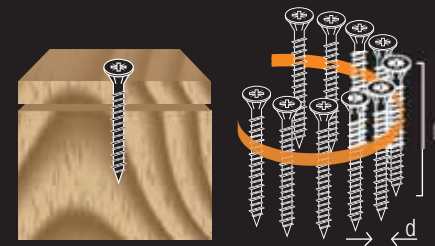

Chipboard screws - cut point

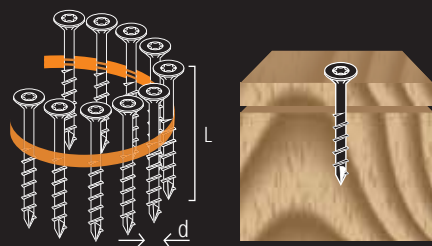


d x L (mm)	3318	3352	3338			Code
TX 20 4,0 x 45 A 2 CS	●	●	●°	800	64.000	73 4998
TX 20 4,5 x 50 A 2 CS			●	500	80.000	73 3054
TX 25 5,0 x 65 A 2 CS			●	500	40.000	73 3127
TX 25 5,0 x 80 A 2 CS			●	500	31.000	73 3128


For splinter-free screwing without pre-drilling.

d x L (mm)	3318	3352	3338			Code
PZ 2 4,2 x 35 GV NS	●	●	●°	1.000	108.000	53 0964
PZ 2 4,2 x 45 GV NS	●	●	●°	2.000	180.000	53 0980
PZ 2 4,2 x 55 GV NS			●°	1.000	90.000	53 0999

Wood screws, Hi-lo double thread, nail point

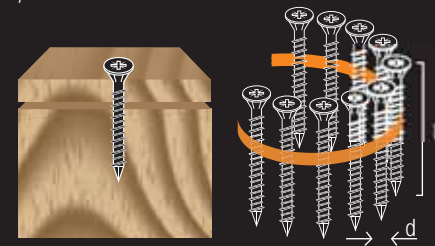



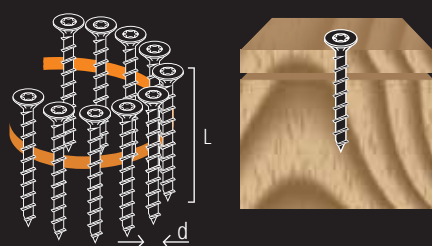


Chipboard screws - full thread



d x L (mm)	3318	3352	3338			Code
TX 20 4,0 x 40 GV	●	●		2.000	200.000	73 4681
TX 20 4,0 x 45 GV	●	●		2.000	180.000	73 4682
TX 20 4,5 x 50 GV			●°	1.500	72.000	73 4683
TX 25 5,0 x 60 GV			●°	1.250	75.000	73 4684

	Code 09 1286 73 4489	Line lubricator R 3/8" Line lubricator R 1/4"
	09 4420 68 3868 73 4949	Special tool oil (1 litre) 250 cm ³ special grease Special tool oil (200 ml)
	73 4875	Reducing nipple, brass, from 1/4" outer thread to 3/8" inner thread
	28 6524	Plug-in nipple, steel with R 1/4" outer thread
	28 6532	Plug-in nipple, steel with R 3/8" outer thread
	73 6072	Plug-in nipple, steel with R 1/4" outer thread , swivelling
	28 6486	Quick release coupling with R 1/4" outer thread
	28 6494	Quick release coupling with R 3/8" inner thread
	28 6508	Quick release coupling with hose connection 9 mm
	28 6516	Plug-in nipple, steel for 9 mm hose connection
	28 6540	Helically coiled hose, 9 mm, expanded 7 m, complete with quick release coupling and plug-in nipple
	68 0745	Strengthened PVC hose, 9 mm, 5 m long, complete with quick release coupling and plug-in nipple
	28 2871	Strengthened PVC hose, 9 mm, per metre
	21 0250	Hose clamp
	31 7802	Suspension for nailers with cover thread M 8 ring screw M- 8 x 13
	73 3841	Suspension for types 3535/3536
	73 4894	Suspension for types 3534
	71 3287	Suspension for types 3418, 3433, 3434, 3435, 3447, 3528, 3529, 3530, 3522, 3548
	40 3393	Spring balancers: 10 - 20 N, 1.6 m cable travel
	40 3407	Spring balancers: 20 - 30 N, 2.0 m cable travel
	28 6478	Spring balancers: 30 - 55 N, 2.0 m cable travel
	73 0715	Spring balancers: 60 - 80 N, 2.0 m cable travel
	73 5327	Air hose reel 25 m. Diameter 9 mm. Can be rotated about 360° on the stand plate. Connection of hose to compressor and nailer by means of a rotating joint, which means it can be rolled out without having to be disconnected.













Carrying case for 3350 / 3352 / 3362 / 3357	Code 73 1591	
Carrying case for 3338	73 1592	
Special spanner for changing bits	69 9527	
Rubber nosepiece for 3301/ 3305 / 3340 / 3341/ 3342 / 3348	55 8656	
Allen screwdriver 3 DIN 911	04 5462	
Adapter for screwdriver attachments types 3301/3302/3303 in connection with screwdrivers 2715/2716/2796/2797/2798	70 9670	
Extension suitable for all models	73 1696	

When? Where? Exhibitions

We are on our way worldwide – but we are still here for you!
You will find an overview of all the important exhibitions on our home page www.kmreich.com

Why not drop by? We look forward to seeing you!



-  Single sequential actuation
-  Contact actuation
-  Single sequential and contact actuation: switchable
-  Plastic collated
-  Wire collated
-  Paper collated
-  Toolless opening of the front plate
-  With penetration depth setting
-  In a practical carrying case
-  Fixing point light
-  VS Electronic, constant speed under load
-  Right / left direction of rotation



Reich products are in accordance with national, EU and international standards. A detailed operating manual containing information about safety features, use and maintenance of the tools, the requisite assembly tools, CE declaration of conformity are included with every product.






The compatibility of the fasteners with the technical regulations of **DIN 1052 part 2** is documented by the compatibility mark (U-mark). The compatibility mark is usually printed on the delivery note, the packaging or the list of contents.

We accept no liability for errors, misprints and any modifications to technical data required. The illustrations are non-binding. Subject to change.


24 months guarantee

The warranty refers exclusively to material and production faults.

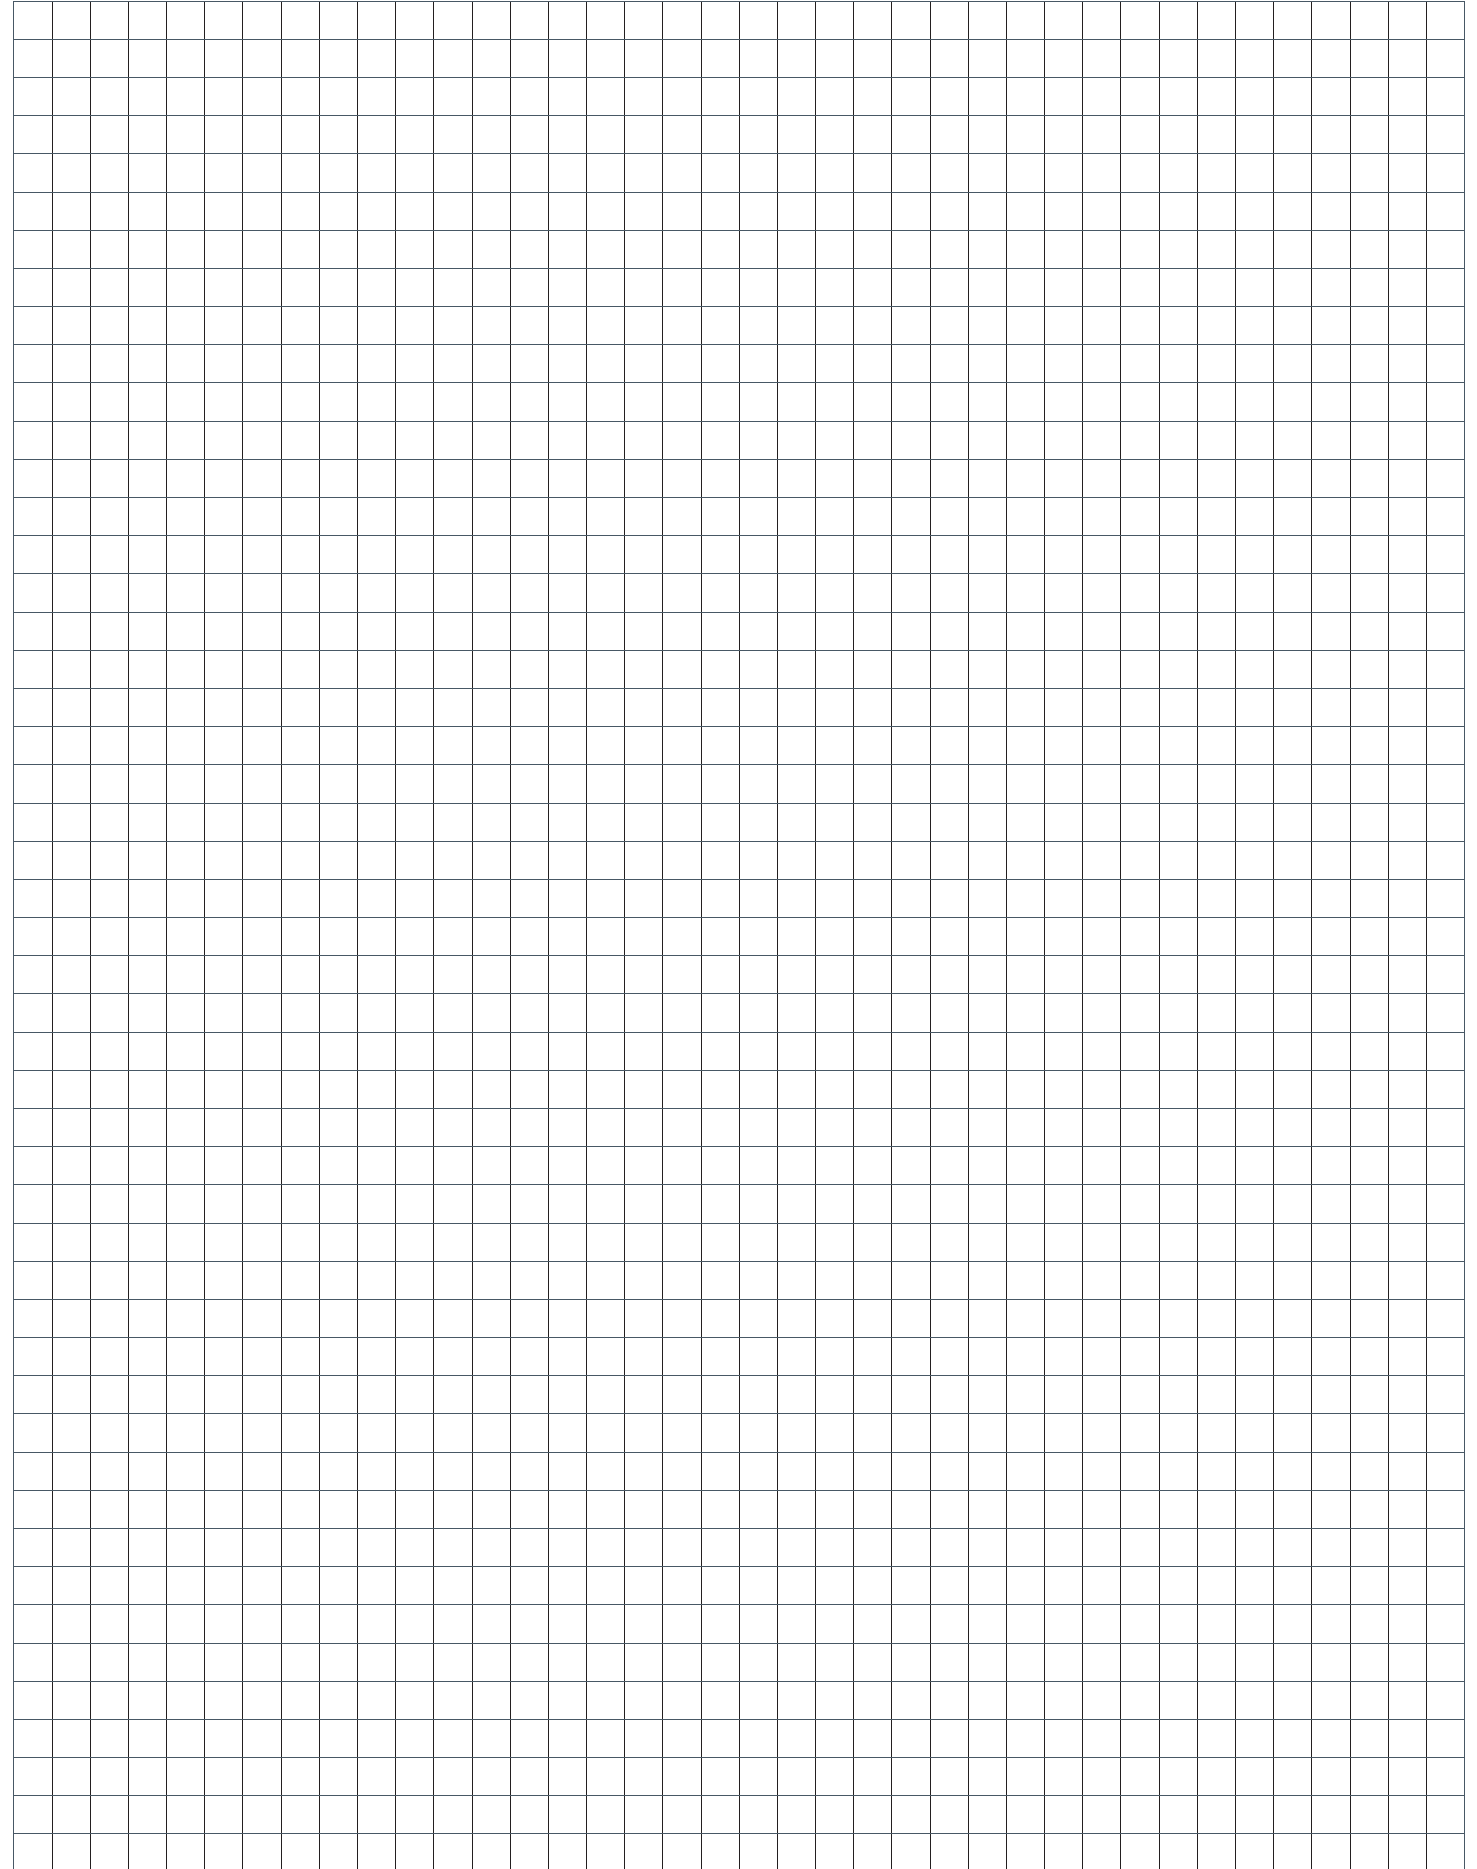

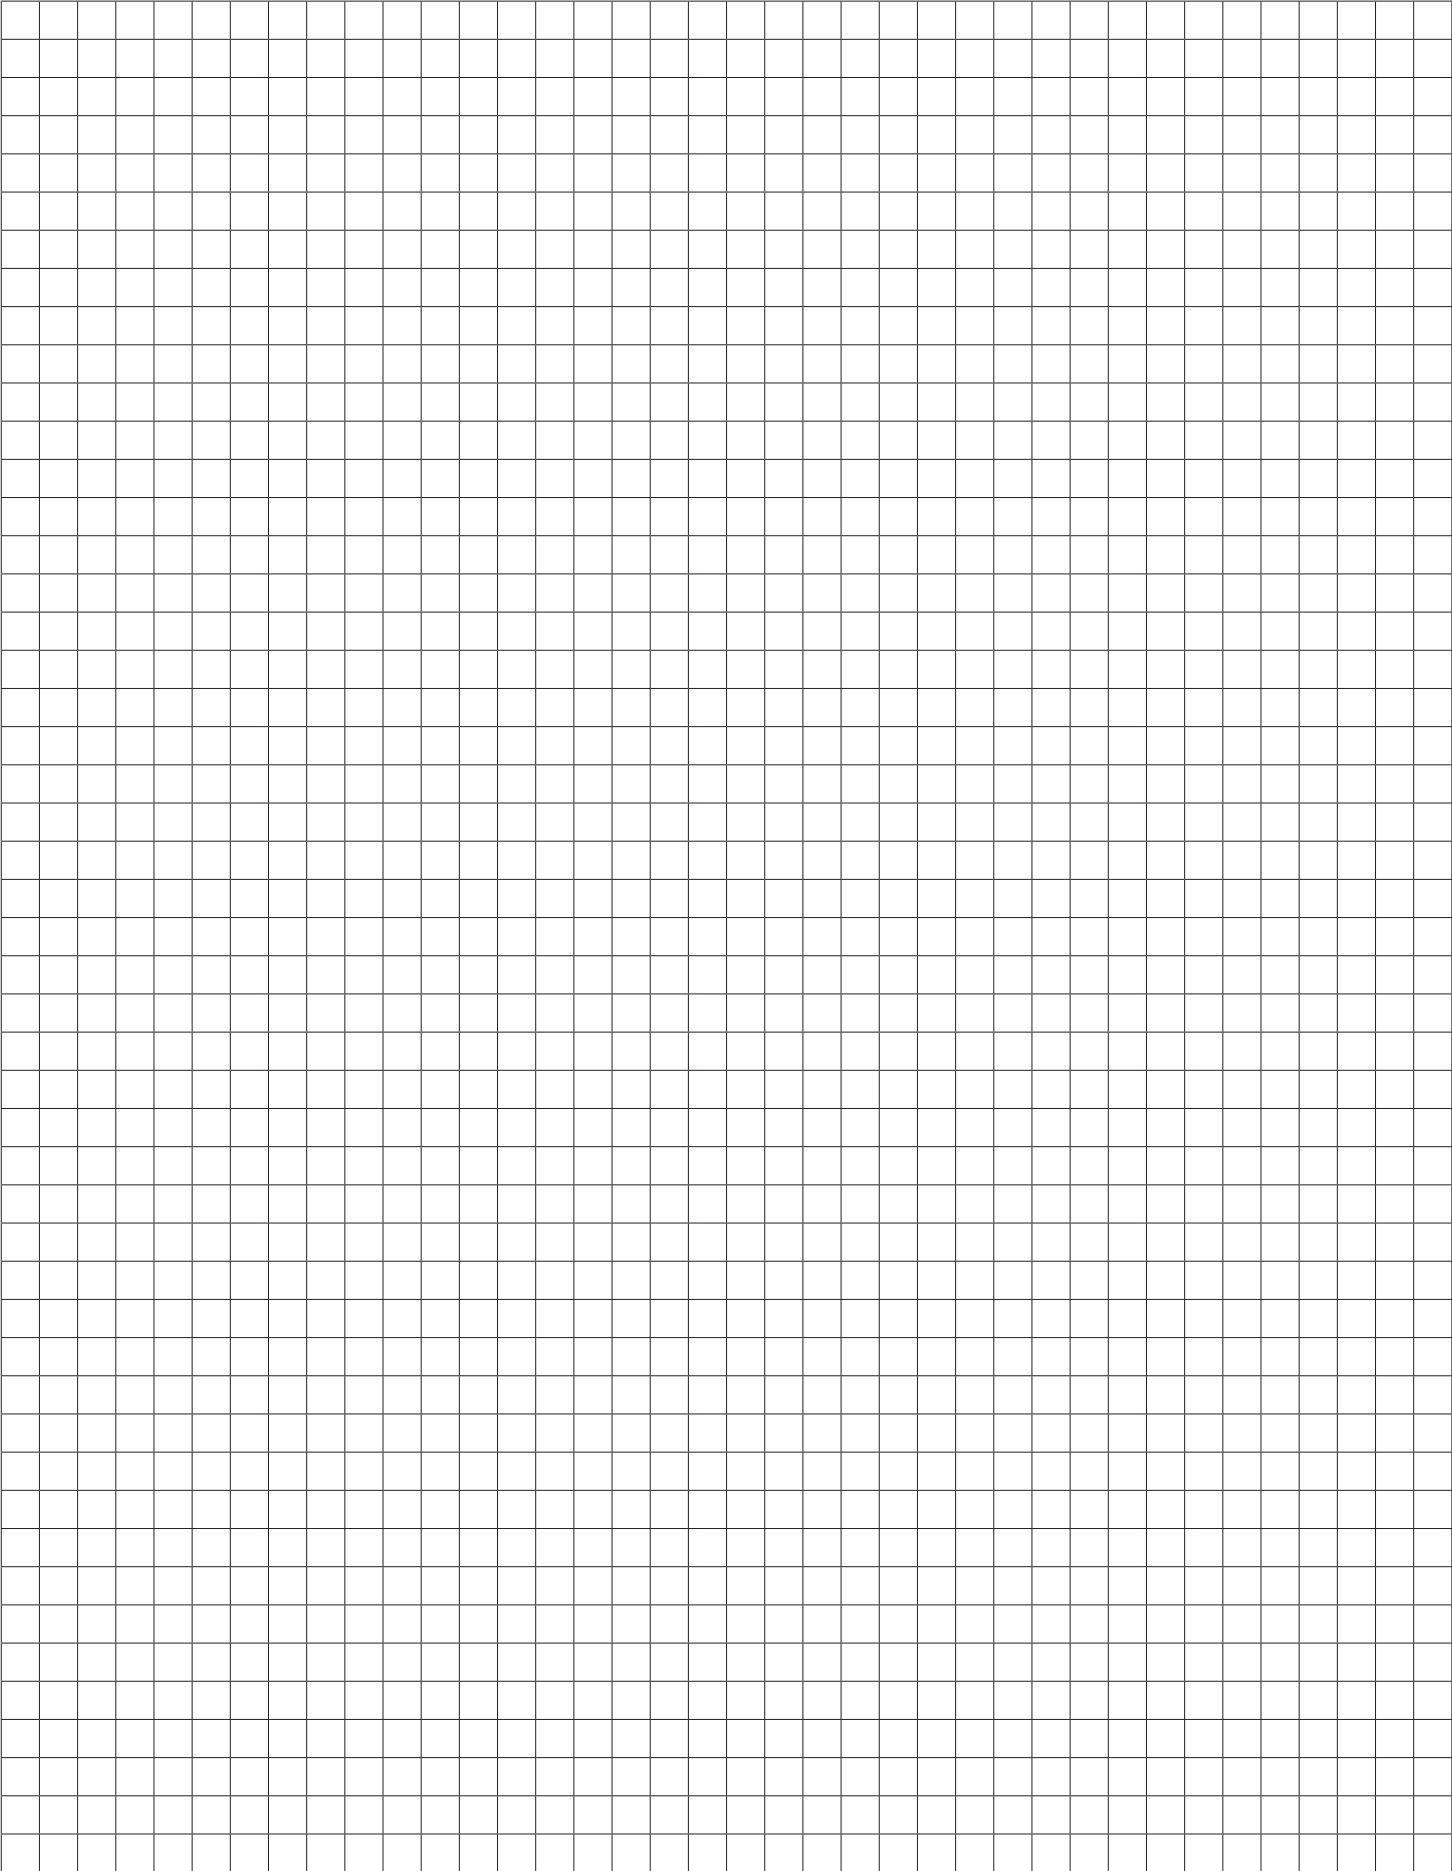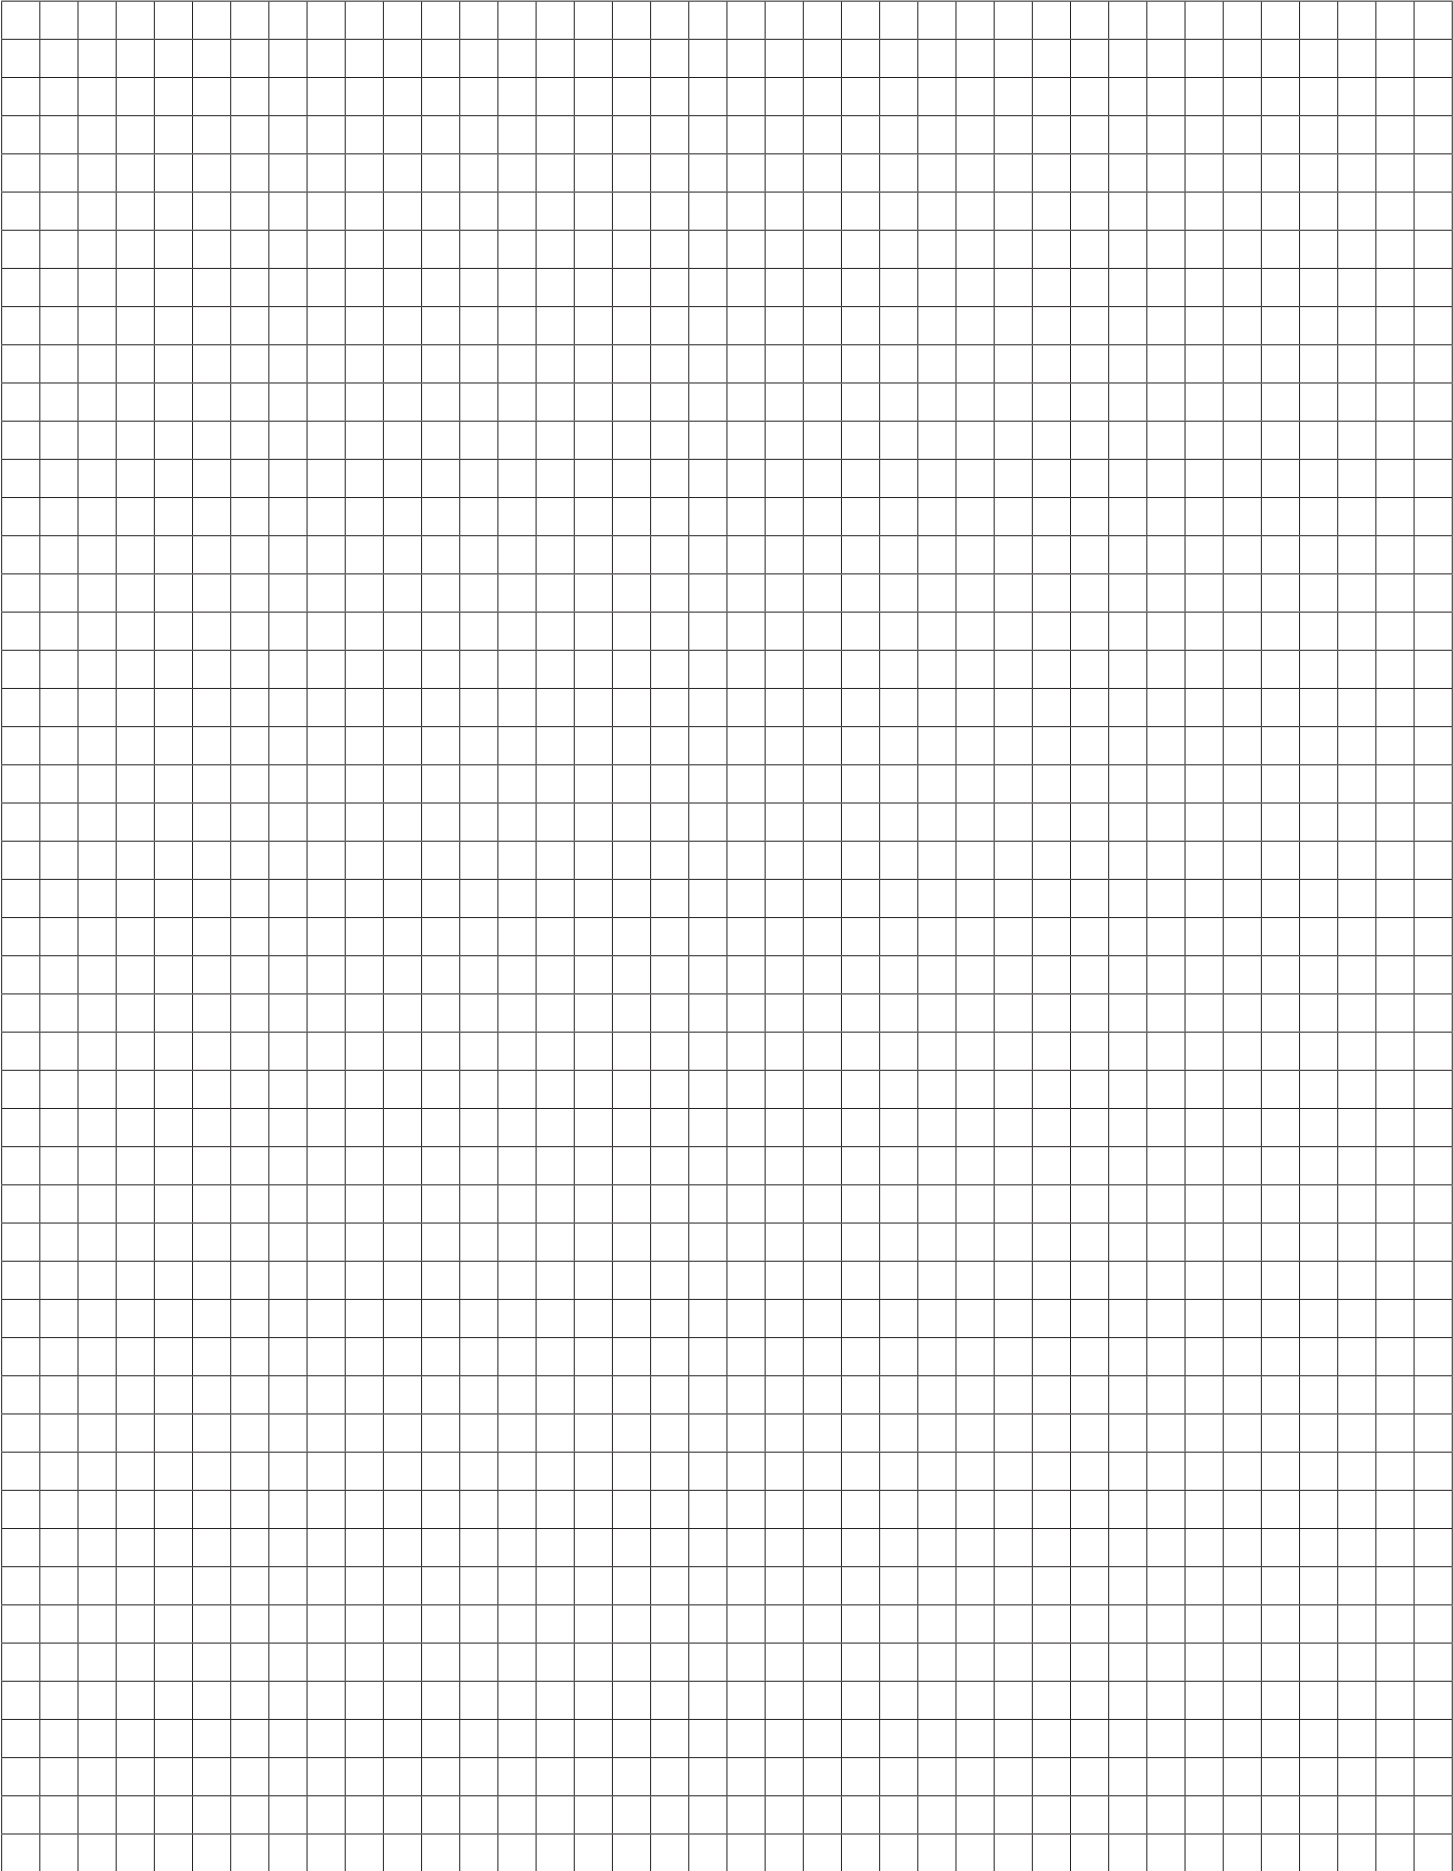

S.C. AVALON TOOLS IMPEX SRL
Bucuresti
Tel/Fax : 021-630.12.42
GSM : 0723-99 11 76 / 0764-22 03 71
e-mail : avalontools@yahoo.com
www.premiertc.ro

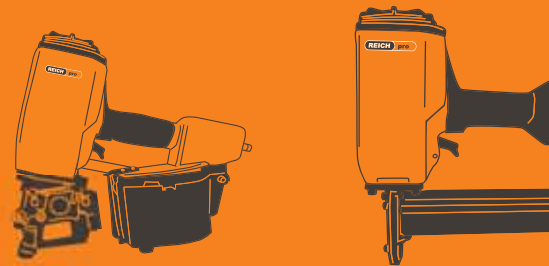

EN 76 9002 Printed in Germany 03/10

Karl M. Reich Verbindungstechnik GmbH
P.O. Box 1740, D-72607 Nürtingen
Germany
T +49 7022 71-0
F +49 7022 71-220
export@kmreich.com

printed carbon neutral 
www.natureOffice.com / DE-166-893555

www.kmreich.com

REICH



Edited with the demo version of
Infix Pro PDF Editor

To remove this notice, visit:
www.iceni.com/unlock.htm