



**Chicago
Pneumatic**



Built to last!

**Construction Tools
Range Overview**

Table of Contents

Pneumatic Equipment

Breakers	4
Spike Drivers	7
Pick Hammers	8
Clay Diggers	11
Chipping Hammers	12
River Busters	17
Rotary Hammers	18
Sinkers / Surface Rock Drills	20
Core Drill	22
Scabblers	22
Saw	23
Pumps	23

Hydraulic Equipment

Power Packs	26
Pick Hammers	27
Breakers	28
Cut-off Saw	32
Core Drill	32
Pumps	33

Petrol-driven Equipment

Breaker	36
---------	----

Compaction Equipment

Forward Soil and Asphalt Plates	38
Walk Behind Double Drum Roller	40
Forward and Reversible Plates	40
Vibrator	42
Tampers	43

Rig-mounted Equipment

Hydraulic Breakers	46
--------------------	----

Compressors

Portable Compressors	52
----------------------	----

Generators

Portable Generators	56
---------------------	----

Light tower

Portable light tower	60
----------------------	----

Important: Full details of sound and vibration measurement stated in the tables are available in the Safety and Operating Instructions of the product. It can be found on www.cprintshop.com



Pneumatic Equipment

Breakers



MODEL	CP 0112*	CP 0112 S	CP 0112 EX*
WEIGHT (kg)	13.5	14.5	16
LENGTH (mm)	535	535	800
AIR CONSUMPTION (l/s)	23	23	23
BLOWS PER MINUTE (bpm)	1620	1620	1620
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		16.3	
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		105	
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		93	
CHUCK SIZE (mm)	25 x 108	25 x 108	25 x 108
PART NUMBER	8900 0030 23	8900 0030 25	8900 0030 24

*Not sold within EU / EEA



MODEL	CP 0117*	CP 0117 S
WEIGHT (kg)	35	36
LENGTH (mm)	740	740
AIR CONSUMPTION (l/s)	35	35
BLOWS PER MINUTE (bpm)	1080	1080
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		11.9
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		108
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		95
CHUCK SIZE (mm)	see part number	see part number
PART NUMBER	T022090 (28 x 160 chuck)	T022093 (28 x 160 chuck)
	T022091 (32 x 160 chuck)	T022092 (32 x 160 chuck)

*Not sold within EU / EEA



MODEL	CP 1210*	CP 1210 S	CP 1210 S
WEIGHT (kg)	20	22	22.5
LENGTH (mm)	540	540	585
AIR CONSUMPTION (l/s)	26.5	26.5	26.5
BLOWS PER MINUTE (bpm)	1400	1400	1400
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		14.6	14.6
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		105	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		92	92
CHUCK SIZE (mm)	25 x 108	25 x 108	see part number
PART NUMBER	8900 0030 01 (N American shank)	8900 0030 03 (N American shank)	8900 0030 07 (28 x 160 chuck)
	8900 0030 02 (ISO standard shank)	8900 0030 04 (ISO standard shank)	8900 0030 09 (32 x 160 chuck)

*Not sold within EU / EEA



MODEL	CP 1210 SVR	CP 1210 SVR
WEIGHT (kg)	24.5	25
LENGTH (mm)	600	650
AIR CONSUMPTION (l/s)	26.5	26.5
BLOWS PER MINUTE (bpm)	1400	1400
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	5.3	5.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	105	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	92	92
CHUCK SIZE (mm)	see part number	see part number
PART NUMBER	8900 0030 05 (25 x 108 chuck, N American shank)	8900 0030 08 (28 x 160 chuck)
	8900 0030 06 (25 x 108 chuck, ISO standard shank)	8900 0030 10 (32 x 160 chuck)

Breakers



MODEL	CP 1230*	CP 1230 S	CP 1230 SVR
WEIGHT (kg)	29.5	31	34.5
LENGTH (mm)	680	680	730
AIR CONSUMPTION (l/s)	32	32	32
BLOWS PER MINUTE (bpm)	1300	1300	1300
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		18.2	7.4
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		108	108
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		95	95
CHUCK SIZE (mm)	see part number	see part number	see part number
PART NUMBER	T022073 (28 x 160 chuck)	T022158 (28 x 160 chuck)	T024227 (28 x 160 chuck)
	T022074 (32 x 160 chuck)	T022159 (32 x 160 chuck)	T024239 (32 x 160 chuck)

*Not sold within EU / EEA



MODEL	CP 1240*	CP 1240 S	CP 1240 SVR
WEIGHT (kg)	37.5	39	43
LENGTH (mm)	735	735	785
AIR CONSUMPTION (l/s)	40	40	40
BLOWS PER MINUTE (bpm)	1150	1150	1150
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		15.3	7.8
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		111	111
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		98	99
CHUCK SIZE (mm)	see part number	see part number	see part number
PART NUMBER	T022075 (28 x 160 chuck)	T022221 (28 x 160 chuck)	T024536 (28 x 160 chuck)
	T022076 (32 x 160 chuck)	T022222 (32 x 160 chuck)	T024535 (32 x 160 chuck)

*Not sold within EU / EEA

Spike Drivers

MODEL	CP 1230 SPDR*	CP 1230 S SPDR
WEIGHT (kg)	28.5	30
LENGTH (mm)	625	625
AIR CONSUMPTION (l/s)	32	32
BLOWS PER MINUTE (bpm)	1300	1300
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		18.2
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		108
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		95
CHUCK SIZE (mm)	N/A	N/A
PART NUMBER	T021612	T021613

*Not sold within EU / EEA



MODEL	CP 1240 SPDR*	CP 1240 S SPDR
WEIGHT (kg)	37	38.5
LENGTH (mm)	665	665
AIR CONSUMPTION (l/s)	40	40
BLOWS PER MINUTE (bpm)	1150	1150
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		15.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		111
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		98
CHUCK SIZE (mm)	N/A	N/A
PART NUMBER	T021042	T021041

*Not sold within EU / EEA

Pick Hammers



MODEL	CP 0111 CHLA*	CP 0111 CHIT*
WEIGHT (kg)	11	13
LENGTH (mm)	560	560
AIR CONSUMPTION (l/s)	21	21
BLOWS PER MINUTE (bpm)	1800	1800
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		
CHUCK SIZE (mm)	Hex 25 x 108	Hex 22 x 82.5
PART NUMBER	8900 0001 20	8900 0001 41

*Not sold within EU / EEA



MODEL	CP 0122 S	CP 0122 SL
WEIGHT (kg)	11	13
LENGTH (mm)	565	560
AIR CONSUMPTION (l/s)	22	22
BLOWS PER MINUTE (bpm)	1380	1380
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	16.3	16.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	105	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	89	93
CHUCK SIZE (mm)	Hex 22 x 82.5	Hex 22 x 82.5
PART NUMBER	8900 0001 43	8900 0001 48



MODEL	CP 0122 SVR	CP 0122 SVR
WEIGHT (kg)	13.5	13.5
LENGTH (mm)	665	665
AIR CONSUMPTION (l/s)	21	21
BLOWS PER MINUTE (bpm)	1380	1380
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	21.9	21.9
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	105	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	89	89
CHUCK SIZE (mm)	Hex 22 x 82.5	Rd 25 x 75
PART NUMBER	8900 0001 45	8900 0001 44



MODEL	CP 0125 S	CP 0125 SVR
WEIGHT (kg)	12.5	14
LENGTH (mm)	630	730
AIR CONSUMPTION (l/s)	17	17
BLOWS PER MINUTE (bpm)	1080	1080
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	28.7	30.1
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	105	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	91	91
CHUCK SIZE (mm)	Rd 25 x 75	Rd 25 x 75
PART NUMBER	8900 0001 46	8900 0001 47

Pick Hammers



MODEL	CP 0222 CHIT*	CP 0222 CHITBS	CP 0222 CHOTBS
WEIGHT (kg)	10	11	11
LENGTH (mm)	510	510	510
AIR CONSUMPTION (l/s)	19	19	19
BLOWS PER MINUTE (bpm)	1500	1500	1500
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²		19.8	19.8
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)		105	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		90	90
CHUCK SIZE (mm)	Hex 22 x 82.5	Hex 22 x 82.5	Hex 22 x 82.5
PART NUMBER	8900 0001 21	8900 0001 22	8900 0001 23

*Not sold within EU / EEA



MODEL	FL 0022 S
WEIGHT (kg)	10.5
LENGTH (mm)	495
AIR CONSUMPTION (l/s)	22
BLOWS PER MINUTE (bpm)	1380
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	16.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	89
CHUCK SIZE (mm)	Rd 25 x 75
PART NUMBER	8900 0001 42

*Not sold within EU / EEA

Clay Diggers



MODEL	FL 0022	FL 0022 S
WEIGHT (kg)	10.5	11
LENGTH (mm)	495	495
AIR CONSUMPTION (l/s)	22	22
BLOWS PER MINUTE (bpm)	1380	1380
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	16.3	16.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	-	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	-	89
CHUCK SIZE (mm)	Sq 19 x 82	Sq 19 x 82
PART NUMBER	8900 0001 24	8900 0001 25



MODEL	FL 0022 SVR	FL 0022 VR
WEIGHT (kg)	13	12.5
LENGTH (mm)	635	635
AIR CONSUMPTION (l/s)	21	21
BLOWS PER MINUTE (bpm)	1380	1380
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	21.9	21.9
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	105	-
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	89	-
CHUCK SIZE (mm)	Sq 19 x 82	Sq 19 x 82
PART NUMBER	8900 0001 39	T025402

Chipping Hammers



MODEL	CP 0012 19X50	CP 0012 2R	CP 0012 2H
WEIGHT (kg)	5.5	5.5	5.5
LENGTH (mm)	406	406	406
AIR CONSUMPTION (l/s)	9.5	9.5	9.5
BLOWS PER MINUTE (bpm)	2600	2600	2600
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	14.6	14.6	14.6
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	104	104	104
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	89	89	89
CHUCK SIZE (mm)	Hex 19 x 50	Rd 17.3	Hex 14.7
PART NUMBER	8900 0001 01	8900 0001 02	8900 0001 03



MODEL	CP 0016 19x50
WEIGHT (kg)	8.5
LENGTH (mm)	420
AIR CONSUMPTION (l/s)	12
BLOWS PER MINUTE (bpm)	1920
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	9.6
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	104
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	91
CHUCK SIZE (mm)	Hex 19 x 50
PART NUMBER	8900 0001 32



MODEL	CP 0017 SVR 19 x 50	CP 0017 SVR 3R	CP 0017 SVR 3H
WEIGHT (kg)	9.5	9.5	9.5
LENGTH (mm)	540	535	535
AIR CONSUMPTION (l/s)	17	17	17
BLOWS PER MINUTE (bpm)	1770	1770	1770
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	12.4	12.4	12.4
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	104	104	104
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	90	90	90
CHUCK SIZE (mm)	Hex 19 x 50	Rd 17.3	Hex 14.7
PART NUMBER	8900 0001 35	8900 0001 36	8900 0001 37



MODEL	CP 4123 2R*	CP 4123 2R*	CP 4123 3R*
WEIGHT (kg)	7	7	7.5
LENGTH (mm)	375	375	425
AIR CONSUMPTION (l/s)	12	12	14
BLOWS PER MINUTE (bpm)	2200	2220	1800
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	13.2	13.2	11.4
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)			
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)			
CHUCK SIZE (mm)	Rd 17.3	Hex 14.7	Rd 17.3
PART NUMBER	8900 0001 04	8900 0001 05	8900 0001 06

*Not sold within EU / EEA

Chipping Hammers



MODEL	CP 4123 3H*	CP 4123 4R*	CP 4123 4H*
WEIGHT (kg)	7.5	8	8
LENGTH (mm)	425	460	460
AIR CONSUMPTION (l/s)	14	13	13
BLOWS PER MINUTE (bpm)	1800	1440	1440
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	11.4	13.9	13.9
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)			
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)			
CHUCK SIZE (mm)	Hex 14.7	Rd 17.3	Hex 14.7
PART NUMBER	8900 0001 07	8900 0001 08	8900 0001 09

*Not sold within EU / EEA



MODEL	CP 4125 2R*	CP 4125 2H*	CP 4125 3R*
WEIGHT (kg)	7	7	7.5
LENGTH (mm)	380	380	415
AIR CONSUMPTION (l/s)	13	13	15
BLOWS PER MINUTE (bpm)	1920	1920	1680
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	13.8	13.8	15.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)			
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)			
CHUCK SIZE (mm)	Rd 17.3	Hex 14.7	Rd 17.3
PART NUMBER	8900 0001 10	8900 0001 11	8900 0001 12

*Not sold within EU / EEA



MODEL	CP 4125 3H*	CP 4125 4R*	CP 4125 4H*
WEIGHT (kg)	7.5	8	8
LENGTH (mm)	415	445	445
AIR CONSUMPTION (l/s)	15	13	13
BLOWS PER MINUTE (bpm)	1680	1440	1440
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	15.3	14.6	14.6
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)			
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)			
CHUCK SIZE (mm)	Hex 14.7	Rd 17.3	Hex 14.7
PART NUMBER	8900 0001 13	8900 0001 14	8900 0001 15

*Not sold within EU / EEA



MODEL	CP 4130 3R	CP 4130 3H
WEIGHT (kg)	8.5	8.5
LENGTH (mm)	420	420
AIR CONSUMPTION (l/s)	12	12
BLOWS PER MINUTE (bpm)	1920	1920
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	9.6	9.6
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	104	104
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	90	90
CHUCK SIZE (mm)	Rd 17.3	Hex 14.7
PART NUMBER	8900 0001 16	8900 0001 17

Chipping Hammers



MODEL	CP 4130 4R	CP 4130 4H
WEIGHT (kg)	9	9
LENGTH (mm)	450	450
AIR CONSUMPTION (l/s)	12.5	12.5
BLOWS PER MINUTE (bpm)	1440	1440
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	12.3	12.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	104	104
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	90	90
CHUCK SIZE (mm)	Rd 17.3	Hex 14.7
PART NUMBER	8900 0001 18	8900 0001 19



MODEL	CP 4131 3R	CP 4131 3H
WEIGHT (kg)	9	9
LENGTH (mm)	420	420
AIR CONSUMPTION (l/s)	12	12
BLOWS PER MINUTE (bpm)	1920	1920
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	9.6	9.6
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	104	104
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	91	91
CHUCK SIZE (mm)	Rd 17.3	Hex 14.7
PART NUMBER	8900 0001 33	8900 0001 34

Rivet Busters



MODEL	CP 4608 P	CP 4608 D
WEIGHT (kg)	13.5	14
LENGTH (mm)	585	600
AIR CONSUMPTION (l/s)	21	21
BLOWS PER MINUTE (bpm)	900	900
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	12.6	12.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	105	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	93	93
CHUCK SIZE	Jumbo	Jumbo
PART NUMBER	8900 0001 49	8900 0001 51



MODEL	CP 4611 P	CP 4611 D
WEIGHT (kg)	15	15.5
LENGTH (mm)	660	675
AIR CONSUMPTION (l/s)	21	21
BLOWS PER MINUTE (bpm)	720	720
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	13.3	14.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	105	105
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	93	93
CHUCK SIZE	Jumbo	Jumbo
PART NUMBER	8900 0001 50	8900 0001 52

Rotary Hammers



MODEL	CP 0009 A*	CP 0009 AC*	CP 0009 CS
WEIGHT (kg)	4	4	4.5
LENGTH (mm)	375	375	375
AIR CONSUMPTION (l/s)	9	9	9
BLOWS PER MINUTE (bpm)	3420	3420	3420
VIBRATION LEVEL 3 AXES (ISO 20643) BREAKING / DRILLING (m/s ²)	20.2 / 21.2	20.2 / 21.2	20.2 / 21.2
SOUND POWER LEVEL GUARANTEED (2000/14/EC)			103
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)			88
CHUCK SIZE (mm)	Rd 19 x 95	Rd 19 x 95	Rd 19 x 95
PART NUMBER	T022083	Z0027413	T022322

*Not sold within EU / EEA



MODEL	CP 0009 E*	CP 0009 ES	CP 0009 F*
WEIGHT (kg)	4	4.5	4
LENGTH (mm)	375	375	375
AIR CONSUMPTION (l/s)	9	9	9
BLOWS PER MINUTE (bpm)	3420	3420	3420
VIBRATION LEVEL 3 AXES (ISO 20643) BREAKING / DRILLING (m/s ²)	20.2 / 21.2	20.2 / 21.2	20.2 / 21.2
SOUND POWER LEVEL GUARANTEED (2000/14/EC)		103	
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		88	
CHUCK SIZE (mm)	Rd 19 x 14.7 Hex x 89	Rd 19 x 14.7 Hex x 89	Spline
PART NUMBER	T022180	T022330	T022511

*Not sold within EU / EEA



MODEL	CP 0014 RR*	CP 0014 RRBS
WEIGHT (kg)	6.5	7
LENGTH (mm)	470	470
AIR CONSUMPTION (l/s)	22	22
BLOWS PER MINUTE (bpm)	2520	2520
VIBRATION LEVEL 3 AXES (ISO 20643) BREAKING / DRILLING (m/s ²)	35.4 / 45.3	35.4 / 45.3
SOUND POWER LEVEL GUARANTEED (2000/14/EC)		
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)		
CHUCK SIZE (mm)	Hex 22 x 82	Hex 22 x 82
PART NUMBER	T022173	T022321

*Not sold within EU / EEA

Sinkers / Surface Rock Drills



MODEL	CP 0022	CP 0022	CP 0032
WEIGHT (kg)	15	15	24.5
LENGTH (mm)	475	500	560
AIR CONSUMPTION (l/s)	22	22	48
BLOWS PER MINUTE (bpm)	2220	2220	2100
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	25.7	25.7	21.9
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	116	116	122
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	106	106	111
CHUCK SIZE (mm)	Hex 22 x 82.5	Hex 22 x 108	Hex 22 x 82.5
PART NUMBER	8900 0020 01	8900 0020 02	T022318



MODEL	CP 0032 S	CP 0032	CP 0032
WEIGHT (kg)	28	26	26
LENGTH (mm)	575	575	575
AIR CONSUMPTION (l/s)	48	48	48
BLOWS PER MINUTE (bpm)	2100	2100	2100
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	21.9	21.9	21.9
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	114	122	122
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	103	111	111
CHUCK SIZE (mm)	Hex 22 x 108	Hex 22 x 108	Hex 25 x 108
PART NUMBER	T025431	T022117	T022319



MODEL	CP 0069 WET	CP 0069	CP 0069
WEIGHT (kg)	27.5	27.5	27.5
LENGTH (mm)	610	610	610
AIR CONSUMPTION (l/s)	61	61	61
BLOWS PER MINUTE (bpm)	1920	1920	1920
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	29	29	29
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	124	124	124
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	113	113	113
CHUCK SIZE (mm)	Hex 22 x 108	Hex 25 x 108	Hex 22 x 108
PART NUMBER	T025423	T022259	T006661

Core Drill



MODEL	CP 0315
POWER (kW)	0.9
WEIGHT (kg)	6
AIR CONSUMPTION (L/S)	20
REVOLUTIONS (rpm)	750
DRILLING DIAMETER (mm)	50-150
OUTPUT SHAFT THREAD (mm)	45 / 64-16
AIR INLET (in)	1/2" BSP
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	7.4
PART NUMBER	T024733

Scabblers



MODEL	CP 0006	CP 0006 SVR	CP 0066
WEIGHT (kg)	5	6.5	4.5
LENGTH (mm)	470	510	280
AIR CONSUMPTION (l/s)	13	13	11.5
BLOWS PER MINUTE (bpm)	3000	3000	3000
AIR INLET	1/2" NPTF	1/2" NPTF	1/2" BSP
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	23.1	7.1	12.8
SOUND PRESSURE LEVEL (2000/14/EC) dB(A)	92	92	
PART NUMBER	T022137	8900 0040 01	T024412


Saw



MODEL	CP 0044*
POWER (kW)	3
WEIGHT (kg)	11
AIR CONSUMPTION (l/s)	40
REVOLUTIONS (rpm)	4800
BLADE (mm)	355
MAX DEPTH (mm)	100
ARBOR (mm)	25
AIR INLET	1/2" NPT
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	6.6
SOUND POWER LEVEL GUARANTEED (2000/14/EC) dB(A)	112
PART NUMBER	T024421

*Not sold within EU / EEA

Pumps

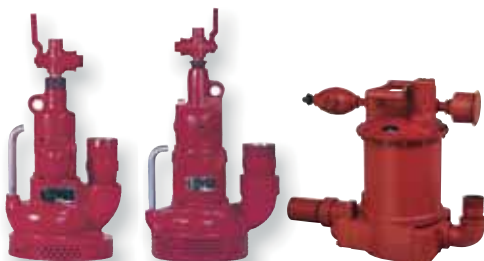

MODEL	CP 0010	CP 0020	CP 0077
POWER (kW)	2.2	2.9	
WEIGHT (kg)	15	26	69
MIN. OPENING (mm)	210x230	230x240	
MAX SUCTION LIFT (m)			6.1
MAX HEAD (m)	30.5	27.4	53
AIR CONSUMPTION (l/s)	47	51	40
AIR INLET (in)	3/4" NPT	1" NPT	3/4" NPT
DISCHARGE (in)	2" NPT	2½" NPT	2½" NPT
PART NUMBER	T022224	T022185	T024005


Notes:





Hydraulic Equipment

Power Packs

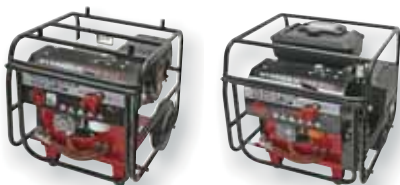

MODEL	PAC P9	PAC P13	PAC P18
ENGINE	9 HP Honda Petrol	13 HP Honda Petrol	18 HP B&S Vanguard Petrol
WEIGHT (INCL OIL) (kg)	59	87	110
DIMENSIONS (LxWxH) (mm)	585 x 525 x 680	705 x 600 x 745	720 x 700 x 745
OIL FLOW (l/min)	20	20-30	20-40
MAXIMUM PRESSURE (bar)	150	150	150
FUEL CAPACITY (l)	6	6.5	7.2
EHTMA CLASS	C	C/D	C/D/E
HOSE INCLUDED	NO	NO	NO
POWER ON DEMAND (POD)	YES	YES	NO
OIL CONTROL: ENGINE OIL	YES	YES	YES
ELECTRIC START	NO	NO	YES
PART NUMBER	1807 0080 33	1807 0110 29	1807 0160 28
NON-SILENCED VERSIONS *	1807 0080 26	1807 0110 25	1807 0160 34

* Not sold within EU / EEA



MODEL	PAC D10
ENGINE	18 HP Lombardini Diesel
WEIGHT (INCL OIL) (kg)	116
DIMENSIONS (LxWxH) (mm)	705 x 600 x 745
OIL FLOW (l/min)	20
MAXIMUM PRESSURE (bar)	140
FUEL CAPACITY (l)	5
EHTMA CLASS	C
HOSE INCLUDED	NO
POWER ON DEMAND (POD)	NO
OIL CONTROL: ENGINE OIL	NO
ELECTRIC START	YES
PART NUMBER	-
NON-SILENCED VERSIONS*	1807 0110 27

* Not sold within EU / EEA

Pick Hammer



MODEL	BRK 25 D
SHANK SIZE (hex mm)	22x82,5
WEIGHT (kg)	12,6
LENGTH (mm)	600
OIL FLOW (l/min)	20
WORKING PRESSURE (bar)	70-90
MAX. RETURN LINE PRESSURE (bar)	10
BLOWS PER MINUTE (bpm)	2400
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	16,5
SOUND POWER LEVEL GUARANTEED (2000/14/EC) L _w , dB(A)	105
SOUND PRESSURE LEVEL (ISO 11203) L _p , r=1m	93
EHTMA CLASS	C
PART NUMBER	1801 1746 12

Breakers



MODEL	BRK 40	BRK 40 VR
WEIGHT (kg)	17.5-19	22-23.5
LENGTH (mm)	640-690	650-700
OIL FLOW (l/min)	20	20
WORKING PRESSURE (bar)	95-115	95-115
MAX. RETURN LINE PRESSURE (bar)	10	10
BLOWS PER MINUTE (bpm)	1600	1600
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ² *	15.1	5.0
SOUND POWER LEVEL (2000/14/EC) L _w dB(A) *	107	107
SOUND PRESSURE LEVEL (2000/14/EC) L _p dB(A) *	93	93
EHTMA CLASS	C	C
PART NUMBER		
25 x 108 mm (1 x 4¼ in)	1801 3446 11	1801 3447 19
28 x 152 mm (1½ x 6 in)	-	1801 3447 20
28 x 160 mm (1½ x 6¼ in)	1801 3446 58	-
32 x 152 mm (1¼ x 6 in)	1801 3446 60	1801 3447 21
32 x 160 mm (1¼ x 6¼ in)	1801 3446 62	1801 3447 22
HIGH BACK PRESSURE VERSION		
MAX. RETURN LINE PRESSURE (bar)	-	-
PART NUMBER		
28 x 152 mm (1½ x 6 in)	-	-
32 x 152 mm (1¼ x 6 in)	-	-

* BRK 40 measured at 20 l/min



MODEL	BRK 55	BRK 55 VR
WEIGHT (kg)	20.5-22	25-26.5
LENGTH (mm)	680-730	690-735
OIL FLOW (l/min)	30 *	30 *
WORKING PRESSURE (bar)	110-125	110-125
MAX. RETURN LINE PRESSURE (bar)	15	15
BLOWS PER MINUTE at flow range (bpm)	1500-1980	1500-1980
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ² **	16.6	4.6
SOUND POWER LEVEL (2000/14/EC) Lw dB(A) **	107	107
SOUND PRESSURE LEVEL (2000/14/EC) Lp dB(A) **	94	94
EHTMA CLASS	D (C) *	D (C) *
PART NUMBER		
25 x 108 mm (1 x 4¼ in)	1801 3546 05	1801 3547 23
28 x 152 mm (1½ x 6 in)	-	-
28 x 160 mm (1½ x 6¼ in)	1801 3546 63	-
32 x 152 mm (1¼ x 6 in)	1801 3546 65	1801 3547 24
32 x 160 mm (1¼ x 6¼ in)	1801 3546 68	1801 3547 25
HIGH BACK PRESSURE VERSION		
MAX. RETURN LINE PRESSURE (bar)	30	30
PART NUMBER		
28 x 152 mm (1½ x 6 in)	1801 3546 83	-
32 x 152 mm (1¼ x 6 in)	-	1801 3546 66

* Can be adjusted to 20 l/min

** BRK 55 measured at 20 l/min

Breakers



MODEL	BRK 70	BRK 70 VR
WEIGHT (kg)	25	29.5
LENGTH (mm)	760	765
OIL FLOW (l/min)	30 *	30 *
WORKING PRESSURE (bar)	110-125	110-125
MAX. RETURN LINE PRESSURE (bar)	15	15
BLOWS PER MINUTE at flow range (bpm)	1380-1860	1380-1860
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ² **	19.4	4.6
SOUND POWER LEVEL (2000/14/EC) Lw dB(A) **	110	110
SOUND PRESSURE LEVEL (2000/14/EC) Lp dB(A) **	95	95
EHTMA CLASS	D (C) *	D (C) *
PART NUMBER		
25 x 108 mm (1 x 4¼ in)	-	-
28 x 152 mm (1½ x 6 in)	-	-
28 x 160 mm (1½ x 6¼ in)	1801 3646 70	1801 3647 26
32 x 152 mm (1¼ x 6 in)	1801 3646 73	1801 3647 27
32 x 160 mm (1¼ x 6¼ in)	1801 3646 07	1801 3647 28
HIGH BACK PRESSURE VERSION		
MAX. RETURN LINE PRESSURE (bar)	30	30
PART NUMBER		
28 x 152 mm (1½ x 6 in)	1801 3646 84	-
32 x 152 mm (1¼ x 6 in)	-	1801 3646 71

* Can be adjusted to 20 l/min

** BRK 70 measured at 20 l/min



MODEL	BRK 95	BRK 95 VR
WEIGHT (kg)	31.5	36
LENGTH (mm)	760	765
OIL FLOW (l/min)	30 *	30 *
WORKING PRESSURE (bar)	110-125	110-125
MAX. RETURN LINE PRESSURE (bar)	15	15
BLOWS PER MINUTE at flow range (bpm)	1100-1350	1100-1350
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ² **	20.1	5.4
SOUND POWER LEVEL (2000/14/EC) L _w dB(A) **	106	106
SOUND PRESSURE LEVEL (2000/14/EC) L _p dB(A) **	93	93
EHTMA CLASS	D (E) **	D (E) **
PART NUMBER		
25 x 108 mm (1 x 4¼ in)	-	-
28 x 152 mm (1½ x 6 in)	-	-
28 x 160 mm (1½ x 6¼ in)	-	-
32 x 152 mm (1¼ x 6 in)	1801 3746 75	1801 3747 29
32 x 160 mm (1¼ x 6¼ in)	1801 3746 09	1801 3747 30
HIGH BACK PRESSURE VERSION		
MAX. RETURN LINE PRESSURE (bar)	30	-
PART NUMBER		
28 x 152 mm (1½ x 6 in)	1801 3746 85	-
32 x 152 mm (1¼ x 6 in)	-	-

* Can be adjusted to 40 l/min

** BRK 95 measured at 30 l/min

Cut-Off Saws



MODEL	SAW 14	SAW 16
WEIGHT (kg)	9.8	10.6
OIL FLOW (l/min)	20-30	20-40
MAXIMUM OIL PRESSURE (bar)	170	170
REVOLUTIONS (rpm)	2500-4000	2000-4000
SPEED (m/s)	46-75	42-85
DISC SIZE (mm)	355	405
ARBOR SIZE (mm)	25.4	25.4
CUTTING DEPTH (mm)	133	160
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	4,9	4,9
SOUND POWER LEVEL GUARANTEED (2000/14/EC) Lw, dB(A)	99	115
SOUND PRESSURE LEVEL (ISO 11203) Lp, dB(A) r=1m	86	102
EHTMA CLASS	C/D	C/D/E
PART NUMBER	1809 0140 03	1809 0166 13

Core Drills



MODEL	COR 5	COR 15
WEIGHT (kg)	8.2	8.2
OIL FLOW (l/min)	20-30	20-30
LENGTH WITHOUT DRILL (mm)	414	406
WORKING PRESSURE (bar)	80-172	80-172
REVOLUTIONS (rpm)	600-900	1500-2250
DRILL DIAMETER (mm)	50-202	12-75
THREAD FEMALE (drive) *	½" BSP	½" BSP
VIBRATION LEVEL 3 AXES (ISO 20643) m/s ²	3,1	2,7
SOUND PRESSURE LEVEL (ISO 11203) Lp, dB(A) r=1m	<70	<70
EHTMA CLASS	C/D	C/D
PART NUMBER	1806 1014 54	1806 1014 55

* 1/2" BSP male x 1 1/4 UNC male drive adaptor included for use of larger diameter core bits.

Pumps



MODEL	WAP 2	WAP 3
WEIGHT (kg)	10.25	12.70
DIMENSIONS HxW (mm)	267 x 215	360 x 300
OIL FLOW (l/min)	18-24	26-38
WORKING PRESSURE (bar)	100	140
MAXIMUM WORKING PRESSURE (bar)	160	172
PUMP MAXIMUM HEAD (m)	25	32
PUMP MAXIMUM FLOW (l/min)	840	1920
DISCHARGE	2"	3"
SOLIDS HANDLING UP TO (mm)	10	60
EHTMA CLASS	C	D
PART NUMBER	1806 1014 41	1806 1014 42

Notes:





Petrol-driven Equipment

Breaker



MODEL	RED HAWK
WEIGHT (kg)	22.5
LENGTH (mm)	694
IMPACT ENERGY (joules)	24
IMPACT RATE (bpm)	2600
ENGINE POWER (kW)	2
FUEL CAPACITY (l)	1.2
VIBRATION LEVEL 3 AXES (ISO 20643) (m/s ²)	8.4
SOUND POWER LEVEL GUARANTEED (2000/14/EC) (L _w) dB(A)	107
SOUND PRESSURE LEVEL (ISO 11203) dB(A)	94
SHANK SIZE (mm)	22x108
PART NUMBER	8318 0900 02



Compaction Equipment

Forward Soil and Asphalt Plates



MODEL	MV 52	MV 58	MV 84
OPERATING WEIGHT (kg)	51.4	56.4	85.1
CENTRIFUGAL FORCE (kN)	7.5	9.5	16.5
SPEED (m/min)	24	25	34
PLATE WIDTH (mm)	320	350	420
ENGINE	Honda	Honda	Honda
SOUND POWER GUARANTEED (L _w AdB(A))	100	100	103
SOUND PRESSURE AT OPERATORS EAR (L _w AdB(A))	89	88	91
H/A VIBRATIONS (m/s ²)	6.9	7.9	6.7
H/A VIBRATIONS, VIBRATION REDUCED HANDLE (m/s ²)	1.8	1.9	1.2
PART NUMBER	4812 0991 25	4812 0991 26	4812 0991 27



MODEL	MV 135	MV 140
OPERATING WEIGHT (kg)	130.9	136.9
CENTRIFUGAL FORCE (kN)	19.4	19.4
SPEED (m/min)	22	22
PLATE WIDTH (mm)	500	500
ENGINE	Honda	Hatz
SOUND POWER GUARANTEED (L _w AdB(A))	102	104
SOUND PRESSURE AT OPERATORS EAR (L _w AdB(A))	91	93
H/A VIBRATIONS (m/s ²)	5.4	6.8
H/A VIBRATIONS, VIBRATION REDUCED HANDLE (m/s ²)	1.1	1.1
PART NUMBER	4812 0991 30	4812 0991 31



MODEL	MV 90	MV 100	MV 115
OPERATING WEIGHT (kg)	87	97.6	114.1
CENTRIFUGAL FORCE (kN)	11.6	15.5	14.5
SPEED (m/min)	27	25	25
PLATE WIDTH (mm)	420	500	500
ENGINE	Honda	Honda	Hatz
SOUND POWER GUARANTEED (L _w AdB(A))	104	104	104
SOUND PRESSURE AT OPERATORS EAR (L _w AdB(A))	93	93	93
H/A VIBRATIONS (m/s ²)	6	6	9.3
H/A VIBRATIONS, VIBRATION REDUCED HANDLE (m/s ²)	1.2	1.3	1.9
PART NUMBER	4812 0991 32	4812 0991 28	4812 0991 29

Walk Behind Double Drum Roller



MODEL	MR 7000 Electric Start	MR 7000 Manual Start
OPERATING WEIGHT (kg)	658	658
CENTRIFUGAL FORCE (kN)	21	21
SPEED (m/min)	60/38	60/38
PLATE WIDTH (mm)	650	650
ENGINE	Hatz	Hatz
SOUND POWER GUARANTEED (L _{wAdB} (A))	107	107
SOUND PRESSURE AT OPERATORS EAR (L _{wAdB} (A))	90	90
H/A VIBRATIONS (m/s ²)	4	4.3
PART NUMBER	4812 0991 46	4812 0991 47

Forward and Reversible Plates



MODEL	MV 165	MV 170
OPERATING WEIGHT (kg)	156	171
CENTRIFUGAL FORCE (kN)	28	28
SPEED (m/min)	22	22
PLATE WIDTH (mm)	450	450
ENGINE	Honda	Hatz
SOUND POWER GUARANTEED (L _{wAdB} (A))	108	108
SOUND PRESSURE AT OPERATORS EAR (L _{wAdB} (A))	92	92
H/A VIBRATIONS (m/s ²)	1.5	2.4
PART NUMBER	4812 0991 42	4812 0991 43



MODEL	MV 220	MV 245 Electric Start
OPERATING WEIGHT (kg)	215	245
CENTRIFUGAL FORCE (kN)	36	36
SPEED (m/min)	25	25
PLATE WIDTH (mm)	500	500
ENGINE	Honda	Hatz
SOUND POWER GUARANTEED (L _w AdB(A))	105	108
SOUND PRESSURE AT OPERATORS EAR (L _w AdB(A))	90	90
H/A VIBRATIONS (m/s ²)	3.5	3.5
PART NUMBER	4812 0991 44	4812 0991 45



MODEL	MV 305	MV 320
OPERATING WEIGHT (kg)	263	300
CENTRIFUGAL FORCE (kN)	40	40
SPEED (m/min)	25	25
PLATE WIDTH (mm)	600	600
ENGINE	Honda	Hatz
SOUND POWER GUARANTEED (L _w AdB(A))	108	108
SOUND PRESSURE AT OPERATORS EAR (L _w AdB(A))	92	94
H/A VIBRATIONS (m/s ²)	2.4	1.7
PART NUMBER	4812 0991 40	4812 0991 41

Forward and Reversible Plates



MODEL	MV 480 Electric Start
OPERATING WEIGHT (kg)	504
CENTRIFUGAL FORCE (kN)	60
SPEED (m/min)	25
PLATE WIDTH (mm)	700
ENGINE	Hatz
SOUND POWER GUARANTEED (LwAdB(A))	108
SOUND PRESSURE AT OPERATORS EAR (LwAdB(A))	95
H/A VIBRATIONS (m/s ²)	2.4
PART NUMBER	4812 0991 39

Vibrator



MODEL	CP 2190
WEIGHT (kg)	19
LENGTH (mm)	350
DIAMETER (mm)	64
AIR CONSUMPTION (l/s)	31
FREQUENCY (vpm)	12000
AIR INLET (in)	1/2" NPTF
VIBRATION LEVEL 3 AXES (ISO 20643) (m/s ²)	1.6
PART NUMBER	T019308

Tampers



MODEL	CP 0003	CP 0004
WEIGHT (kg)	13.5	19
LENGTH (mm)	1320	1270
BUTT DIAMETER (mm)	125	160
AIR CONSUMPTION (l/s)	8.4	13
BLOWS PER MINUTE (bpm)	800	780
AIR INLET (in)	1/2" NPTF	1/2" NPTF
VIBRATION LEVEL 3 AXES (ISO 20643) (m/s ²)	32.3	44.8
PART NUMBER	T019307	T022292

Tampers



MODEL	MS 620	MS 680
OPERATING WEIGHT (kg)	64	74
CENTRIFUGAL FORCE (kN)	14.8	18.6
SPEED (m/min)	15-18	15-18
PLATE WIDTH (mm)	230	280
ENGINE	Honda	Honda
SOUND POWER GUARANTEED (LwAdB(A))	104	107
SOUND PRESSURE AT OPERATORS EAR (LwAdB(A))	91	96
H/A VIBRATIONS (m/s ²)	7	11.9
PART NUMBER	4812 0991 36	4812 0991 37



MODEL	MS 840
OPERATING WEIGHT (kg)	84
CENTRIFUGAL FORCE (kN)	21.4
SPEED (m/min)	13-16
PLATE WIDTH (mm)	280
ENGINE	Hatz
SOUND POWER GUARANTEED (LwAdB(A))	106
SOUND PRESSURE AT OPERATORS EAR (LwAdB(A))	96
H/A VIBRATIONS (m/s ²)	12.6
PART NUMBER	4812 0991 38



Rig-Mounted Equipment

Hydraulic Breakers



MODEL	RX2	RX3
CARRIER WEIGHT CLASS (t) ¹⁾	1,3-3,0	2,1-4,5
SERVICE WEIGHT (kg) ²⁾	117	166
OIL FLOW RATE (l/min)	15-35	30-50
OPERATING PRESSURE (bar)	110-130	110-140
BLOW FREQUENCY (bpm)	560-1700	670-1450
BLOW FREQUENCY (bpm) ³⁾	-	-
WORKING TOOL DIAMETER Ø mm	42	52
WORKING LENGTH OF TOOL (mm)	265	320
SOUND POWER LEVEL GUARANTEED dB(A)	109	111
SOUND PRESSURE LEVEL (r=10m) dB(A)	81	83
PART NUMBER	8460 0500 38	8460 0500 39

MODEL	RX4	RX6
CARRIER WEIGHT CLASS (t) ¹⁾	2,9-6,0	4,2-9,0
SERVICE WEIGHT (kg) ²⁾	233	284
OIL FLOW RATE (l/min)	35-60	45-75
OPERATING PRESSURE (bar)	110-140	100-140
BLOW FREQUENCY (bpm)	520-1150	530-1150
BLOW FREQUENCY (bpm) ³⁾	-	-
WORKING TOOL DIAMETER Ø mm	62	70
WORKING LENGTH OF TOOL (mm)	350	380
SOUND POWER LEVEL GUARANTEED dB(A)	113	114
SOUND PRESSURE LEVEL (r=10m) dB(A)	85	86
PART NUMBER	8460 0500 40	8460 0500 41

1) Weights apply to standard carriers only. Any variances must be agreed with Chicago Pneumatic and/or the carrier manufacturer prior to attachment.

2) Breaker and breaker box with standard adapter plus working tool.

3) Power Control: The blow frequency and impact energy can be adjusted to better meet the application requirements.



MODEL	RX8	RX11
CARRIER WEIGHT CLASS (t) ¹⁾	5,2-12,0	9-15
SERVICE WEIGHT (kg) ²⁾	380	550
OIL FLOW RATE (l/min)	60-90	70-100
OPERATING PRESSURE (bar)	120-150	120-150
BLOW FREQUENCY (bpm)	530-1050	590-1100
BLOW FREQUENCY (bpm) ³⁾	-	-
WORKING TOOL DIAMETER Ø mm	80	80
WORKING LENGTH OF TOOL (mm)	415	390
SOUND POWER LEVEL GUARANTEED dB(A)	115	116
SOUND PRESSURE LEVEL (r=10m) dB(A)	87	-
PART NUMBER	8460 0500 42	3363 1095 21

MODEL	RX14	RX18
CARRIER WEIGHT CLASS (t) ¹⁾	10-17	15-24
SERVICE WEIGHT (kg) ²⁾	800	1200
OIL FLOW RATE (l/min)	100-120	120-140
OPERATING PRESSURE (bar)	150-170	150-170
BLOW FREQUENCY (bpm)	650-850	550-720
BLOW FREQUENCY (bpm) ³⁾	-	-
WORKING TOOL DIAMETER Ø mm	100	120
WORKING LENGTH OF TOOL (mm)	495	540
SOUND POWER LEVEL GUARANTEED dB(A)	-	-
SOUND PRESSURE LEVEL (r=10m) dB(A)	-	-
PART NUMBER	3363 1049 61	3363 1052 39

1) Weights apply to standard carriers only. Any variances must be agreed with Chicago Pneumatic and/or the carrier manufacturer prior to attachment.

2) Breaker and breaker box with standard adapter plus working tool.

3) Power Control: The blow frequency and impact energy can be adjusted to better meet the application requirements.

Hydraulic Breakers



MODEL	RX22	RX25
CARRIER WEIGHT CLASS (t) ¹⁾	17-28	20-33
SERVICE WEIGHT (kg) ²⁾	1500	1800
OIL FLOW RATE (l/min)	140-160	130-180
OPERATING PRESSURE (bar)	150-170	150-170
BLOW FREQUENCY (bpm)	520-680	400-680
BLOW FREQUENCY (bpm) ³⁾	-	460-800
WORKING TOOL DIAMETER Ø mm	135	140
WORKING LENGTH OF TOOL (mm)	565	585
SOUND POWER LEVEL GUARANTEED dB(A)	-	-
SOUND PRESSURE LEVEL (r=10m) dB(A)	-	-
PART NUMBER	3363 1051 01	3363 1056 01

MODEL	RX29	RX45
CARRIER WEIGHT CLASS (t) ¹⁾	25-40	29-46
SERVICE WEIGHT (kg) ²⁾	2200	3000
OIL FLOW RATE (l/min)	150-200	210-260
OPERATING PRESSURE (bar)	150-170	160-180
BLOW FREQUENCY (bpm)	375-600	380-580
BLOW FREQUENCY (bpm) ³⁾	440-800	-
WORKING TOOL DIAMETER Ø mm	150	165
WORKING LENGTH OF TOOL (mm)	590	670
SOUND POWER LEVEL GUARANTEED dB(A)	-	121
SOUND PRESSURE LEVEL (r=10m) dB(A)	-	-
PART NUMBER	3363 1058 93	3363 1053 59

1) Weights apply to standard carriers only. Any variances must be agreed with Chicago Pneumatic and/or the carrier manufacturer prior to attachment.

2) Breaker and breaker box with standard adapter plus working tool.

3) Power Control: The blow frequency and impact energy can be adjusted to better meet the application requirements.



MODEL	RX53
CARRIER WEIGHT CLASS (t) ¹⁾	40-70
SERVICE WEIGHT (kg) ²⁾	4200
OIL FLOW RATE (l/min)	250-320
OPERATING PRESSURE (bar)	160-180
BLOW FREQUENCY (bpm)	350-560
BLOW FREQUENCY (bpm) ³⁾	-
WORKING TOOL DIAMETER Ø mm	180
WORKING LENGTH OF TOOL (mm)	735
SOUND POWER LEVEL GUARANTEED dB(A)	-
SOUND PRESSURE LEVEL (r=10m) dB(A)	-
PART NUMBER	3363 1097 39

- 1) *Weights apply to standard carriers only. Any variances must be agreed with Chicago Pneumatic and/or the carrier manufacturer prior to attachment.*
- 2) *Breaker and breaker box with standard adapter plus working tool.*
- 3) *Power Control: The blow frequency and impact energy can be adjusted to better meet the application requirements.*

Notes:





Compressors

Portable Compressors



MODEL	CPS 2.0 CPS 70	CPS 2.5 CPS 90	CPS 3.0 CPS 110
AIRFLOW ACC. TO ISO 1217 AT WORKING PRESSURE m ³ /min	2.0	2.5	3.0
WORKING PRESSURE bar(e) psi	7 / 102	7 / 102	7 / 102
AIR FLOW (l/s)	33,3	41,7	50
MIN./MAX. WORKING SPEED (rpm)	2400-3600	2400-3000	1850-2750
SOUND POWER LEVEL ACC to 20001/14EC dB(A)	<98	<98	<98
CAPACITY OF FUEL TANK (l)	32	32	40
AIR OUTLET VALVES - QTY X SIZE (in)	2 x 3/4	2 x 3/4	2 x 3/4
LENGTH WITH HORIZONTAL TOWBAR (mm)	2953	2953	3863
WIDTH (mm)	1280	1280	1310
HEIGHT (mm)	1205	1205	1282
OPERATIONAL WEIGHT (FULL FUEL TANK) (kg)	552	556	730
ENGINE	Kubota	Kubota	Deutz
ENGINE TYPE	D905	D1105	D2011L02
OUTPUT AT NOMINAL SPEED (kW)	18.5	19.4	23.3



MODEL	CPS 3.5 CPS 130	CPS 4.5 CPS 150	CPS 5.5 CPS 185
AIRFLOW ACC. TO ISO 1217 AT WORKING PRESSURE m ³ /min	3.7	4.3	5.3
WORKING PRESSURE bar(e) psi	7 / 102	7 / 102	7 / 102
AIR FLOW (l/s)	61,7	71,7	88,3
MIN./MAX. WORKING SPEED (rpm)	1850-2400	1850-2300	1850-2750
SOUND POWER LEVEL ACC to 20001/14EC dB(A)	<98	<98	<98
CAPACITY OF FUEL TANK (l)	80	80	80
AIR OUTLET VALVES - QTY X SIZE (in)	2 x 3/4	2 x 3/4	3 x 3/4
LENGTH WITH HORIZONTAL TOWBAR (mm)	3758	3758	3758
WIDTH (mm)	1400	1400	1400
HEIGHT (mm)	1280	1280	1280
OPERATIONAL WEIGHT (FULL FUEL TANK) (kg)	918	960	960
ENGINE	Deutz	Deutz	Deutz
ENGINE TYPE	D2011L03	D2011L03	D2011L03
OUTPUT AT NOMINAL SPEED (kW)	32.5	31.5	36.0

Portable Compressors



MODEL	CPS 7.5 CPS 275	CPS 11.0 CPS 375	CPS 11-12 CPS 375-12
AIRFLOW ACC. TO ISO 1217 AT WORKING PRESSURE m ³ /min	7.6	11.1	10.4
WORKING PRESSURE bar(e) psi	7 / 102	7 / 102	12 / 175
AIR FLOW (l/s)	126,7	185	173,3
MIN./MAX. WORKING SPEED (rpm)	1800-2400	1700-2300	1550-2200
SOUND POWER LEVEL ACC to 20001/14EC dB(A)	<99	<99	<99
CAPACITY OF FUEL TANK (l)	117	175	175
AIR OUTLET VALVES - QTY X SIZE (in)	3 x 3/4 + 1 x 1 1/2	3 x 3/4 + 1 x 1 1/2	3 x 3/4 + 1 x 1 1/2
LENGTH WITH HORIZONTAL TOWBAR (mm)	4365	4546	4546
WIDTH (mm)	1680	1770	1770
HEIGHT (mm)	1465	1780	1780
OPERATIONAL WEIGHT (FULL FUEL TANK) (kg)	1475	1850	1850
ENGINE	Deutz	Deutz	Deutz
ENGINE TYPE	BF4M2011	TCD2012L04	TCD2013L04
OUTPUT AT NOMINAL SPEED (kW)	58	83.0	104.0



Generators

Portable Generators



MODEL	CPG 12	CPG 20	CPG 30
PRODUCT CONFIGURATION	400V - 3PH	400V - 3PH	400V - 3PH
RATED FREQUENCY	50	50	50
RATED SPEED	1500	1500	1500
RATED APPARENT POWER (PRP)	12	20	30
RATED VOLTAGE 3PH. LINE TO LINE (A)	17.3	28.9	43.3
ENGINE MAKE	DEUTZ	DEUTZ	DEUTZ
MAKE	F2M 2011 F	F3M 2011 F	BF3M 2011 F
RATED NET OUTPUT (kW)	12	19	27.6
BASIC UNIT DIMENSIONS (LxWxH) m	2.02 x 1.04 x 1.02	2.02 x 1.04 x 1.02	2.02 x 1.04 x 1.02
WEIGHT (READY TO OPERATE) (kg)	706	804	827

Built and tested to ISO 9001 quality assurance standards.



MODEL	CPG 40	CPG 60
PRODUCT CONFIGURATION	400V - 3PH	400V - 3PH
RATED FREQUENCY	50	50
RATED SPEED	1500	1500
RATED APPARENT POWER (PRP)	40	60
RATED VOLTAGE 3PH. LINE TO LINE (A)	57.1	86.6
ENGINE MAKE	DEUTZ	DEUTZ
MAKE	BF4M 2011	BF4M 2011C
RATED NET OUTPUT (kW)	36.4	55.2
BASIC UNIT DIMENSIONS (LxWxH) m	2.36 x 1.28 x 1.18	2.36 x 1.28 x 1.18
WEIGHT (READY TO OPERATE) (kg)	1144	1144

Built and tested to ISO 9001 quality assurance standards.

Notes:





Light tower



Light tower



	CPLT
ENGINE CHARACTERISTICS	
MODEL	Yanmar 2TNV70, 2 Cylinder Diesel engine
POWER – kW	6.7
FUEL TANK CAPACITY – US gal (l)	30 (113.6)
FUEL AUTONOMY – hour	85
EMISSIONS	EPA Tier 4
ALTERNATOR CHARACTERISTICS	
MODEL	Permanent magnet brushless, LE G24N1-001
RATED POWER – kVA	5
INSULATION CLASS	H
TORCH CHARACTERISTICS	
LAMPS	4 metal halide 1000 W lamps
EXTERNAL BALLAST	No
MAX. LIGHTING CAPACITY	110.000 lumen/bulb
MAST CHARACTERISTICS	
MAXIMUM HEIGHT – ft (m)	31 (9.44)
ROTATION	360°
OPERATION	Manual
MAXIMUM WIND SPEED – miles/h (km/h)	65 (105)
DIMENSIONS AND WEIGHT L x W x H inch (m)	175 x 120 x 69 (4.45 x 3.04 x 1.75)
WEIGHT – lbs (kg)	1460 (662)

* Not sold within EU/EEU

Notes:



Notes:



www.cp.com



Over 100 years of experience

Since 1901 the name Chicago Pneumatic has stood for innovative, high-performance power tools. Today a wide range of pneumatic and hydraulic construction tools, including breakers, clay diggers, picks and busters, scabblers, rock drills, rotary and chipping hammers, sump and sludge pumps, and a whole lot more, are available through a worldwide sales organization.

For more detailed information, please contact:

Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty or Product Liability.

PMI 9800 1092 01 Copyright 2010, Chicago Pneumatic Construction Equipment AB. Subject to technical modifications.