



For a perfect shining finish.

FESTOOL

Polishing 11

Application overview | 235

Machine overview | 236

Rotary polisher | 237

RAP 80, SHINEX RAP 150, POLLUX 180

System overview | 241

Accessories | 242

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

A more than careful approach is required when working on delicate surfaces or avoiding holograms. Festool not only offers tools here, but also a versatile system that is equal to any polishing task and whose components originate from a single source: from polish and polishing pads to machines.


Polishing

Extra shine from a single source.



From its vast experience with sanding tools, Festool developed its polisher expertise more than 20 years ago. Festool is the only manufacturer currently offering a polishing system that is fully compatible in every way.

Ergonomic machines ensure rapid, non-tiring work. The PoliStick system saves time and increases economic efficiency and our range of compatible accessories optimises your working results. For customers who want it all: from machines to polish, paintwork preparation and polishing out paintwork blemishes. And with the launch of the ROTEX (from page 174), Festool

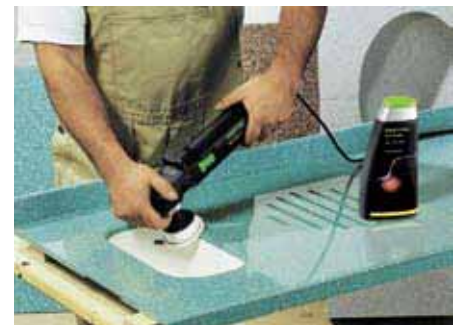

Improved handling over small surfaces: the RAP 80 is also impressive in awkward spots and its ergonomics counteract any risk of tipping over.

introduced the first machine that could polish away holograms! System-compatible from A to Z – from the machine to the polish.

- Uniquely ergonomic, powerful machines that can tackle virtually any polishing task
- Expertise that includes polishing out trapped dust and polishing away holograms



Brilliant performance over large surface areas: the POLLUX 180 is suitable for all work requiring a large coverage capacity.



The all-rounder for medium-sized surfaces: the SHINEX RAP 150 is an impressive, handy machine for universal use – even on delicate surfaces. Because the higher the quality of the workpiece, the greater the tool requirements.

FESTOOL The system



At Festool, we do not only think in terms of tools, but also in terms of systems so that you can work more quickly, easily and efficiently.



Polishing pads.

The integral cushion ensures optimal pressure distribution during polishing.

Polishing pads from page 241



PoliStick system.

Polishing sponges, polishing felt and sheepskins can be changed quickly thanks to the PoliStick system.

PoliStick system from page 242

Application overview – Polishing

Refer to the table below to determine which machine is the most suitable for large or small surfaces, paintwork preparation or high-gloss polish, correction of blemishes in paintwork, removal of trapped dust or holograms. See the following pages for more details.

	RAP 80	SHINEX RAP 150	POLLUX 180 E	ROTEX ¹⁾ RO 125	ROTEX ¹⁾ RO 150	T 15+3 ²⁾	Polish MPA
Small surfaces	●	◐	○	●	◐	●	
Medium-sized surfaces	○	●	◐	●	●	○	
Large surfaces	○	●	●	○	●	○	
Sensitive surfaces	◐	●	◐	●	●	◐	
For long periods of use	◐	●	◐	◐	◐	◐	
Faded paintwork/Preparation	○	●	●	○	●	○	MPA 6000, MPA 8000, MPA 9000
Mineral materials	●	●	●	●	●	○	MPA 6000
Scratch-proof/scratch-resistant paintwork	●	●	●	●	●	●	MPA 5000, MPA 8000, MPA 11000
UV paints	●	●	●	●	●	●	MPA 8000, MPA 10800
Polishing to a high gloss finish	●	●	●	●	●	●	MPA 10000, MPA 10800, MPA 11000
Eliminating holograms				●	●		MPA 10000, MPA 10800, MPA 11000
Polishing out trapped dust	●	●	○	○	○	●	MPA 8000, MPA 11000
Touched up surfaces (blending/spot repair)	●	●	◐	○	○	●	MPA 5000, MPA 8000, MPA 11000
Removing paint drips	●	●	◐	○	○	●	MPA 8000, MPA 11000
Sealing surfaces	●	●	●	●	●	●	MPA-V, MPA 9000

○ Appropriate ◐ Very appropriate ● Extremely appropriate

¹⁾ Separate specifications for ROTEX RO 125 and RO 150 in „Sanding“ section from page 174

²⁾ Separate specifications for cordless drill T 15+3 in „Drilling and fastening“ section from page 14



Polish.

The right polish for every task: from heavy-duty polishing to fine high gloss finishes.

Polish from page 241



Microfibre cloths.

Microfibre cloths for gentle paintwork cleaning and a perfect finish.

Microfibre cloths from page 241



Finishing cleaner.

Removes polish residues and grease spots.

Accessories from page 241

Rotary polisher RAP 80.02



Main applications

- Specialist for small surfaces
- Slim, compact design for excellent manoeuvrability
- For horizontal and vertical surfaces
- Polishing different surfaces: paintwork, mineral materials, etc.

Strengths and benefits

- Ergonomic dome grip and perfect weight distribution for relaxed work
- Speed preselection, controlled speed, smooth start-up
- Temperature-dependent overload protection

Next page 237

Power consumption	500 W
Idle engine speed	750-2300 min ⁻¹
Maximum polishing pad diameter	80 mm
Spindle thread	M14
Weight	1,6 kg

 = with MMC electronics



SHINEX RAP 150 rotary polisher



Main applications


- The all-purpose polish for an exacting finish
- Polishing different surfaces: paintwork, mineral materials, etc.
- For horizontal and vertical surfaces
- Working on awkward, curved spots where a high coverage capacity is also required


Strengths and benefits

- Longer working due to ergonomic handling and light weight
- Accurate polishing at speeds of 400 – 2,100 rpm⁻¹
- Accelerator switch, speed preselection, controlled speed, smooth start-up
- Temperature-dependent overload protection
- Can take heavy loading because of its 2-speed motor
- Handle does not get hot because of the cooling element

Next page 238

Power consumption	1200 W
Idle engine speed	400-2100 min ⁻¹
Maximum polishing pad diameter	150 mm
Spindle thread	M14
Weight	2,1 kg

 = with electronics



Rotary polisher POLLUX 180



Main applications

- Ideal for polishing large areas
- Speed range of 0-2400 rpm (via accelerator switch) for a wide range of uses
- Ideal for horizontal surfaces
- Polishing different surfaces: paintwork, mineral materials, etc.

Strengths and benefits

- Ergonomic dome grip and perfect weight distribution for relaxed work
- Accelerator switch, speed preselection, controlled speed, smooth start-up
- Temperature-dependent overload protection
- Exceptional cooling in lower speed range – allows work under heavy loads

Next page 240

Power consumption	1500 W
Idle engine speed	800-2400 min ⁻¹
Maximum polishing pad diameter	180 mm
Spindle thread	M14
Weight	3,6 kg

 = with MMC electronics



Specialist for small surfaces.

The superior ergonomics of the RAP80.02E are impressive, as is the case with all polishers by Festool: functional dome grip, compact design and low weight. After all, non-tiring work forms the basis for quality working results. Vertical surfaces no longer pose a problem.

Temperature- dependent overload protection.

For a long service life and protection against motor damage.

Better grip.

Ergonomic dome grip, perfect weight distribution and safe machine guidance.

Time-saving changes.

Polishing sponges, polishing felt, sheepskins with PoliStick system, tool-less polishing pad changing thanks to the spindle stop.



Slim and compact.

Slim and compact design. Lightweight and snug in your hand.

Stepless speed preselector.

Stepless speed preselector (MMC electronics) so that you always work at the right speed.

Controlled speed.

Controlled speed and smooth start-up for adaptation to the working surface.

The dome grip on the RAP 80.02 E is designed „around your hand“, the weight is distributed perfectly and the ergonomically shaped side handle always guarantees a firm grip when you guide the machine.



Ideal for awkward spots. The ergonomic handle reduces the risk of the machine tipping over to a minimum.



High gloss finish for small areas. The RAP 80.02 E polishes out trapped dust on painted wooden surfaces, for example, with minimum effort.



The RAP 80.02 E is ideal for small, curved surfaces, eg a motorcycle tank.



The slim, compact design of the RAP 80.02 E is perfect for surfaces such as the wings on a car.

Rotary polisher RAP 80.02

E = with electronics S = with SYSTEMAINER

Model	E	S	Equipment/Scope of delivery	Order no.
RAP 80.02 E	●	—	1 StickFix polishing pad Ø 80 mm, extra hand grip, in carton	570722

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17

Polishing | SHINEX RAP 150 rotary polisher

It runs slow. It runs fast. It runs just the way you want it to.

The requirement that every Festool product must fulfil is to make your everyday work even more effective and better. The new SHINEX polisher was developed as the result of closely working with polishing specialists.


Compact and ergonomic.

The SHINEX weighs just 2.1 kg. Pleasant soft-grip material and the tool's slim design make for a secure hold in any position.



Fluff filter.

Constant high performance – the fluff filter protects the motor against dirt and dust. In combination with the temperature dependant overload protection, it proves a long service life.



Spindle stop.

The spindle lock allows pads to be changed without the use of tools. The slightly recessed location and the sophisticated mechanics prevent it from being engaged when polishing and thus protect the motor.



Abrasion-resistant PU cable.

Sturdy and durable: the new abrasion-resistant PU cable.



Accelerator switch.

The accelerator trigger switch makes careful, controlled polishing at low speed possible. In addition, this switch can be set to maximum speed and locked if necessary.

Close to the surface.

The minimal distance from the pad to the tool body allows more sensitive control when polishing, reducing the risk of the tool tipping over. The back of the housing functions as a secure rest point.



2-speed motor.

The motor makes polishing at speeds of 400 to 2,100 rpm possible, and makes the SHINEX powerful and robust. The built-in cooling element ensures that the handle will not get too warm.

SHINEX RAP 150 rotary polisher – The different options

E = with electronics S = with SYSTAINER

Model	E	S	Equipment/Scope of delivery	Order no.
RAP 150 FE-Set	–	●	Extra handle, StickFix polishing pad Ø 150 mm, sanding disc mix (Titan 2), Platin 2 mix (Ø 80 mm), Titan 2 mix (Ø 77 mm), spot sander, MPA 8000 polish, MPA 11000 polish, PoliStick polishing sponge Ø 150 mm, orange, medium, PoliStick polishing sponge Ø 150 mm, black, very fine, Polistick premium sheepskin Ø 150 mm, 2 microfibre polishing cloths, finishing cleaner, in a SYS MAXI SYSTAINER	570786
RAP 150 FE	●	–	additional side-mounted hand grip, StickFix Ø 150 mm polishing pad, in carton	570762

Technical data, see page 236

Accessories see page 246

It will even impress you the first time you see it. By the second time, you will be delighted.



All-purpose.

The SHINEX is the perfect solution for polishing paintwork, material compounds such as Corian® and Varicolor® and furniture to a high-gloss finish.



From 400 to 2,100 rpm.

Power is one thing, but to use it in a carefully controlled manner is quite another. By using the properly positioned accelerator trigger, the SHINEX can be run at low rpm to provide the right amount of feel and can be accelerated up to 2,100 rpm at the highest speed setting.




Developed for long periods of use.

Because of its 2-speed motor, the SHINEX has enough available power reserves to perform polishing work for extended periods of time. Both at high speeds and at particularly demanding low speeds. The integrated cooling element ensures that the handle does not get too warm.



Close to the subject.

To transfer power optimally to a surface, the SHINEX was designed to sit somewhat lower. The small space between the power tool and the pad provides polishing with a high degree of feel and, as a result of the location of its centre of gravity, guarantees the best polishing results.

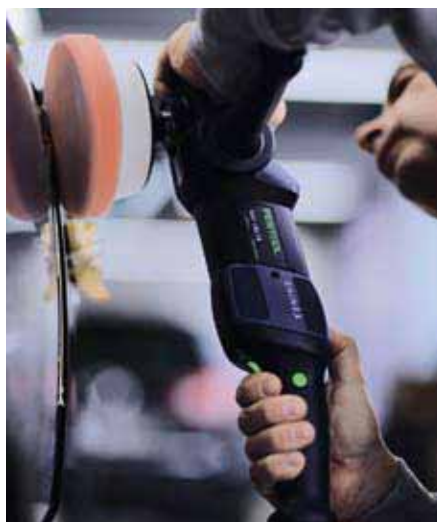

Brilliant work conditions.

The ergonomic shape of the handle and the high-quality soft-grip material make the SHINEX noticeably more pleasant and secure to guide. And at a total weight of just 2.1 kg it is well-suited even to long polishing jobs – with very little effort required.



For comfortable work.

For example, even during set-up, pad changes can be made without the use of tools by using the spindle lock. Or just put the SHINEX down while using the back of the housing to prevent it from tipping over and you will be able to change the polishing sponge by using the PoliStick attachment system.

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17

Polishing | Rotary polisher POLLUX 180

Powerhouse with high coverage capacity.

This machine is particularly economical because of its high coverage capacity – ideal for those who have their work cut out. Without a stepless speed preselector and accelerator switch, you'll be hard pushed to finish your work as quickly. Optimised cooling and high load capacity.

Better grip.

Ergonomic dome grip and perfect weight distribution.

Stepless speed preselector.

Stepless speed preselector (MMC electronics) so that you always work at the right speed.

High torque and load capacity.

Improved cooling in the lower speed range, temperature- dependent overload protection ensures high load capacity.

Accelerator switch.

Enables a slow start-up and prevents the polish from spraying off.

Time-saving changes.

Polishing sponges, polishing felt, sheepskins with PoliStick system, tool-less polishing pad changing thanks to the spindle stop.

Controlled speed.

Controlled speed and smooth start-up for adaptation to the working surface.



The POLLUX 180 E enables perfect adaptation to different materials and surfaces. The motor speed always remains constant thanks to the MMC electronics and allows you to work evenly without damaging the workpiece and avoid time-consuming reworking.



The POLLUX 180 E does just the job on large surfaces: its high load capacity ensures economical use.



The accelerator switch with smooth start-up prevents the polish from spraying off and minimises impurities.



All switches within easy reach. The speed range of 0 to 2400 rpm (via accelerator switch) widens the application range considerably.



Controlled power. Using the POLLUX 180 E only requires minimal effort thanks to the perfect weight distribution.

Rotary polisher POLLUX 180

E = with electronics S = with SYSTAINER


Model	E	S	Equipment/Scope of delivery	Order no.
POLLUX 180 E	●	—	1 StickFix polishing pad Ø 180 mm, extra hand grip, in carton	570734

Technical data, see page 236


Accessories see page 247

Festool polishes make polishing easy as well as saving time. Ideally suited to different kinds of polishing work, the four grades of polish guarantee the best results with minimum effort in combination with the appropriate Festool machines.

A perfect surface in 3 steps

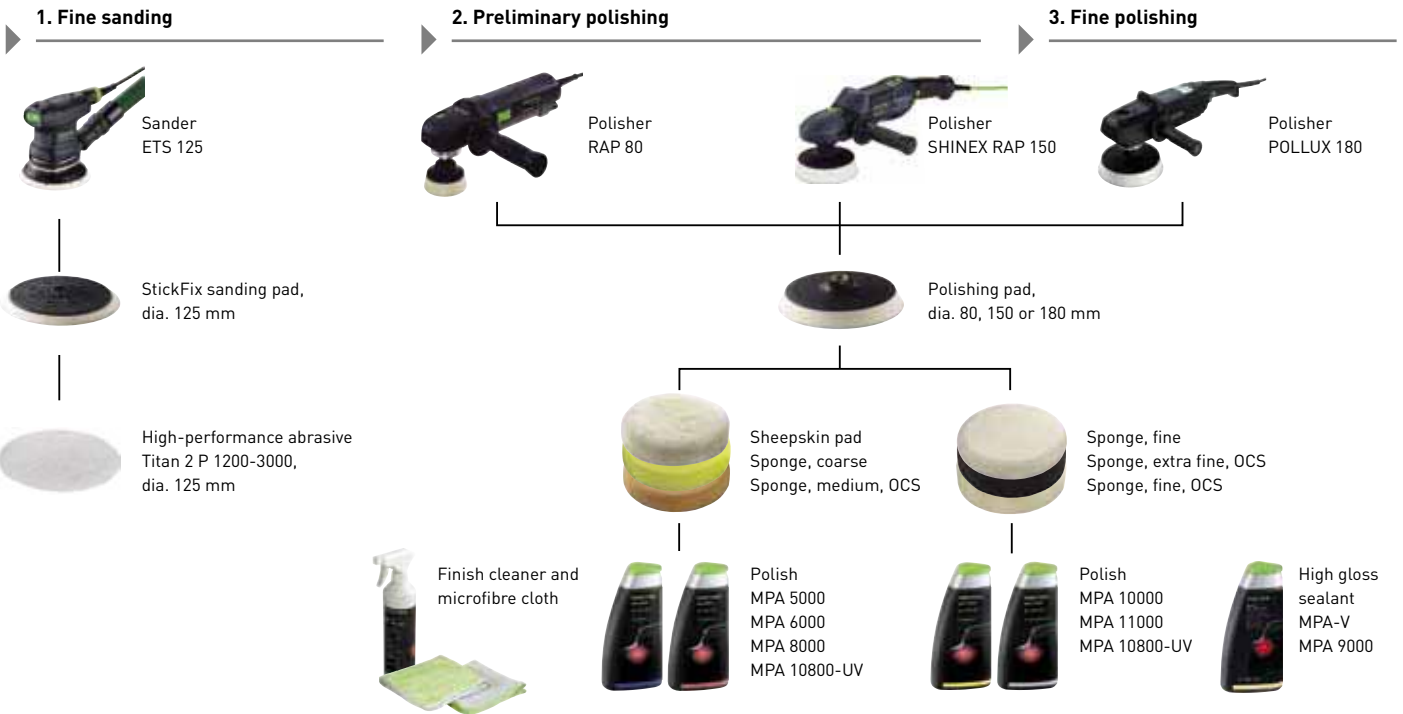

Special applications

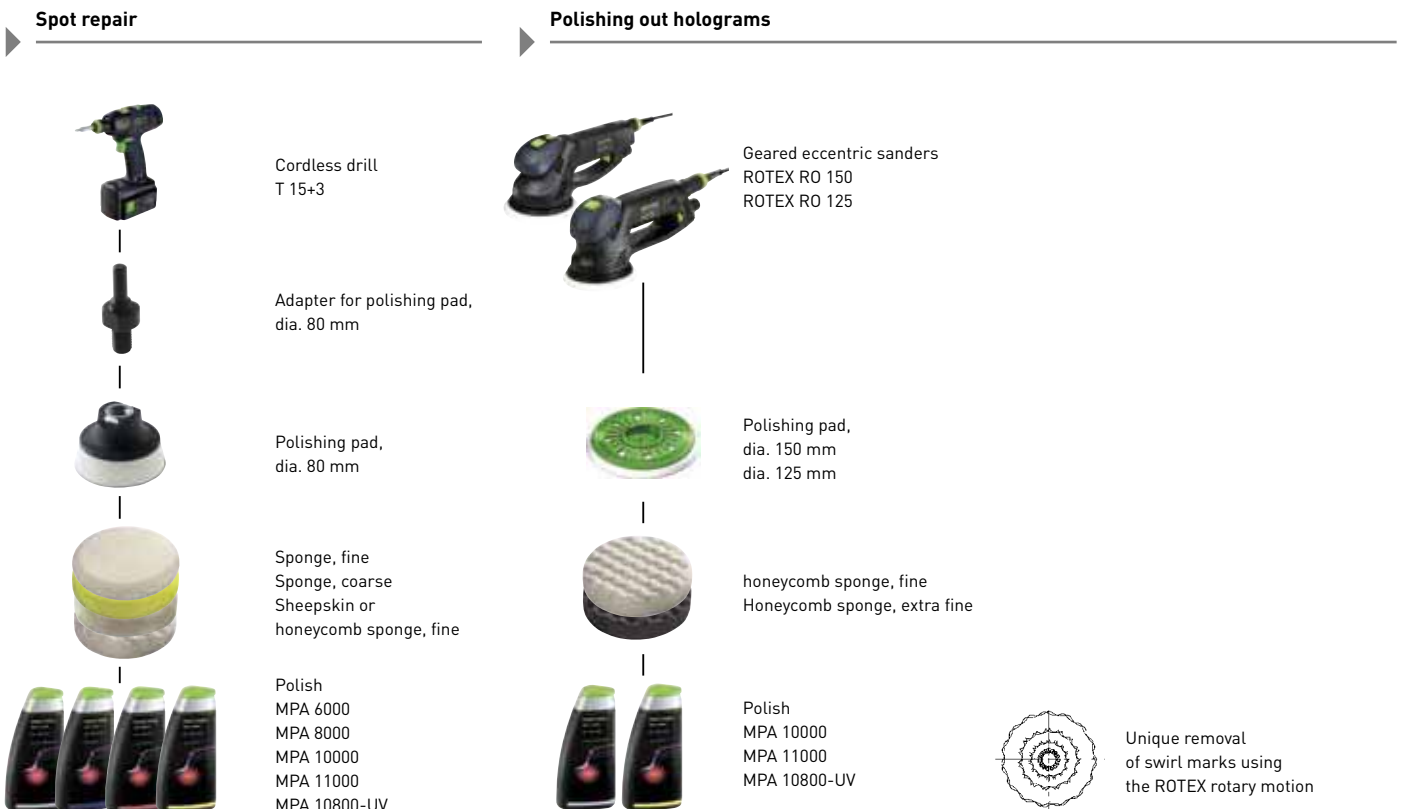

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17

High gloss finish with system.

Festool offers the perfect solution for every application: from polishing pads and different polishing sponges and felt to sheepskins in a wide variety of textures and sizes with rounded edges and special velour adapted to prevent minute grooves from forming. One polishing system by one manufacturer: from machines to polishing agents.



Polishing felt, hard

For preliminary polishing of mineral materials, acrylic glass and gloss paints.

Polishing felt, soft

For re-polishing mineral materials, acrylic glass and gloss paints.



Polishing sponge, fine

For repolishing/finishing after removing trapped dust, for high-gloss polish with honeycombed texture for polishing away holograms



Sheepskin pad

With abrasive qualities – for preparing paintwork and eliminating blemishes. Circulating air cools the surface to the ideal temperature.



Polishing sponge, medium/fine OCS¹⁾

For polishing out paint flaws, dust inclusions and paint drips. Sponge with open cell structure (OCS) to absorb the polish more efficiently.



Polishing sponge, coarse

For polishing badly weathered surfaces and for paintwork preparation.



Polishing sponge, extra fine OCS¹⁾

For processing sealant and buffing polish, honeycombed for polishing out minor holograms. Open cell structure (OCS) to minimise polish spray-off.

¹⁾ OCS = open cell structure

Equipped for special applications.




Scratch-proof paintwork? No problem.

When used for preliminary polishing scratch-proof or scratch-resistant transparent varnish, Festool sheepskin achieves an excellent surface finish.



Designed for mineral materials.

Different grades of Festool polishing felt are available. They are particularly suited to polishing mineral materials, acrylic glass and varnishes.

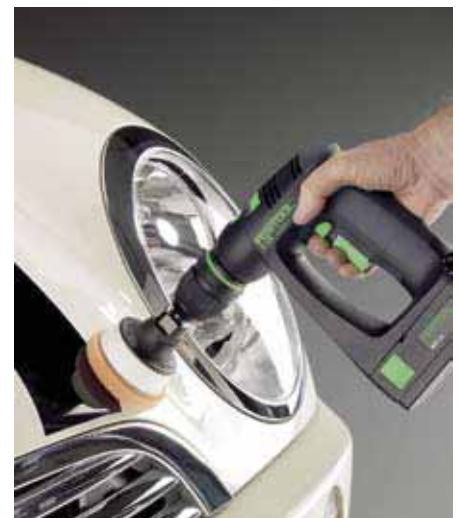

High-gloss polish.

Festool honeycomb sponges are suitable for high-gloss polishing. The fine texture produces a perfect gloss finish, ensures adequate air circulation (the surface does not become too hot) and polishes away holograms, in combination with ROTEX (p. 174).

A gleaming performance.



Polishing like new.

With our improved formulas, you can achieve a finish that is as good as new. All four polishes are aluminium-oxide-based: The grit disintegrates during sanding. The mechanical functioning principle here makes silicone and wax superfluous – for perfect results in an instant.



The sanding polish: MPA 6000.

Areas of application: 1. Hardened paint surfaces with long drying time. 2. For extremely good results on weathered paint. 3. For paintwork blemishes, e.g. orange peel, dust nibs. 4. Also after preliminary treatment of blemishes with Titan 2 P3000.



The MPA 8000 sanding polish.

Areas of application: 1. Finishing work shortly after painting. 2. For excellent results when polishing touched-up surfaces (blending, spot repair). 3. Also after using MPA 6000 or Platin 2 S4000.



The high-gloss polish: MPA 10000.

Areas of application: 1. Finishing work after polishing out paintwork blemishes. 2. For removing swirl marks. 3. Produces a high gloss on any painted surface, even on dark and sensitive colours. 4. Also after using MPA 6000 or MPA 8000.



Ceramic high-gloss polish: MPA 11000.

Areas of application: 1. Scratch-proof clear coats. 2. Removing polish haze, swirl marks and microscratches. 3. Dark and sensitive colours. 4. Improving the finish of new paintwork and new vehicles. 5. Also after using MPA 6000 or MPA 8000.



A complete system.

All included in one product range: tool, polishing sponges, sheepskin, polishes, etc. Only Festool offers a complete system for increased economic efficiency. Those who wish to transport and store all system components within easy reach will find the SYSTAINER a useful accessory.

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

PoliStick for Ø 80 mm

	Denomination and application	Type	Order no.
	Adapter for Festool stirrers: to mount in a drill chuck, for sanding disc with M14 thread: for mounting in drilling and boring machines, for polishing pad Ø80: for use in cordless drills Clamping flange Ø 10 mm	AD-D10/M14	483944
	Polishing pad for RAP 80 fits polishing accessories, with integrated shock absorber for optimum distribution of pressure during polishing Diameter 70 mm, Height 20 mm, qty. in pack 1 piece(s)	PT-STF-D80-M14	488337
	Polishing sponge coarse, yellow, for polishing heavily weathered surfaces (preparation for painting) Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D 80X20-G/5	493842
	Polishing sponge orange, mid, for preliminary polishing when repairing paint flaws Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D 80X20-M-OCS/5	493849
	Polishing sponge white, fine, for preliminary polishing and finishing when removing trapped dust and for buffing Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D 80X20-F/5	493863
	Polishing sponge white, fine (honeycombed), for preliminary polishing and finishing when removing dust inclusions, for polishing out holograms Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D 80X20-F-GEW/5	493870
	Polishing sponge beige, fine, for removing paintwork blemishes, for re-polishing when removing dust inclusions Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D 80X20-F-OCS/5	493856
	Polishing sponge black, very fine, for processing sealant, for high-gloss polish Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D 80X20-SF-OCS/5	493877
	Polishing sponge black, very fine (honeycombed), for polishing out holograms, for high-gloss polish Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D 80X20-SF-OCS/5	493884
	Polishing felt hard, for preliminary polishing of mineral materials, acrylic glass and gloss paints Diameter 80 mm, Height 10 mm, qty. in pack 5 piece(s)	PF-STF-D80x10-H/5	488339
	Polishing felt soft, for re-polishing mineral materials, acrylic glass and gloss paints Diameter 80 mm, Height 10 mm, qty. in pack 5 piece(s)	PF-STF-D80x10-W/5	488341
	Sheepskin for polishing scratch-resistant paints Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	LF-STF-D80/5	490247
	Premium sheepskin suitable for UV paints, scratch-resistant paints Diameter 80 mm, Height 20 mm, qty. in pack 5 piece(s)	LF-PREM.-STF-D 80/5	493835

PoliStick for Ø 125 mm

	Denomination and application	Type	Order no.
	Polishing pad FastFix for R0 125 FEQ fits polishing accessories Diameter 125 mm, Height 10 mm, qty. in pack 1 piece(s)	PT-STF-D125 FX-R0125	492128
	Polishing sponge yellow, coarse, for polishing heavily weathered surfaces (preparation for painting) Diameter 125 mm, Height 20 mm, qty. in pack 1 piece(s) Diameter 125 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D125X20-G/1 PS-STF-D125X20-G/5	493843 493844
	Polishing sponge orange, mid, for preliminary polishing when repairing paint flaws Diameter 125 mm, Height 20 mm, qty. in pack 1 piece(s) Diameter 125 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D125X20-M-OCS/1 PS-STF-D125X20-M-OCS/5	493850 493851
	Polishing sponge white, fine, for preliminary polishing and finishing when removing trapped dust and for buffing Diameter 125 mm, Height 20 mm, qty. in pack 1 piece(s) Diameter 125 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D125X20-F/1 PS-STF-D125X20-F/5	493864 493865
	Polishing sponge white, fine (honeycombed), for preliminary polishing and finishing when removing dust inclusions, for polishing out holograms Diameter 125 mm, Height 20 mm, qty. in pack 1 piece(s) Diameter 125 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D125X20-F-GEW/1 PS-STF-D125X20-F-GEW/5	493871 493872
	Polishing sponge beige, fine, for removing paintwork blemishes, for re-polishing when removing dust inclusions Diameter 125 mm, Height 20 mm, qty. in pack 1 piece(s) Diameter 125 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D125X20-F-OCS/1 PS-STF-D125X20-F-OCS/5	493857 493858
	Polishing sponge black, very fine, for processing sealant, for high-gloss polish Diameter 125 mm, Height 20 mm, qty. in pack 1 piece(s) Diameter 125 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D125X20-SF-OCS/1 PS-STF-D125X20-SF-OCS/5	493878 493879
	Polishing sponge black, very fine (honeycombed), for polishing out holograms, for high-gloss polish Diameter 125 mm, Height 20 mm, qty. in pack 1 piece(s) Diameter 125 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D125X20-SF-OCS/1 PS-STF-D125X20-SF-OCS/5	493885 493886
	Polishing felt hard, for preliminary polishing of mineral materials, acrylic glass and gloss paints Diameter 125 mm, Height 10 mm, qty. in pack 5 piece(s)	PF-STF-D125x10-H/5	493078
	Polishing felt for re-polishing mineral materials, acrylic glass and gloss paints Diameter 125 mm, Height 10 mm, qty. in pack 5 piece(s)	PF-STF-D125x10-W/5	493077
	Sheepskin for polishing scratch-resistant paints Diameter 125 mm, Height 20 mm, qty. in pack 5 piece(s)	LF-STF-D125/5	493079
	Premium sheepskin suitable for UV paints, scratch-resistant paints Diameter 125 mm, Height 20 mm, qty. in pack 1 piece(s)	LF-PREM.-STF-D125/1	493836

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15


16

17


PoliStick for Ø 150 mm

	Denomination and application	Type	Order no.
	Polishing pad FastFix for RO 150 FEQ fits polishing accessories Diameter 130 mm, Height 10 mm	PT-STF D150 FX-RO150	493914
	Polishing pad for RO 150 fits polishing accessories Diameter 145 mm, Height 6 mm	PT-STF-D150-M8	485748
	Polishing pad for RAP 150 fits polishing accessories, with integrated shock absorber for optimum distribution of pressure during polishing Diameter 125 mm, Height 25 mm, qty. in pack 1 piece(s)	PT-STF-D150-M14	488342
	Additional hand grip for RO 150, RAS, WTS 150	ZG-RAS/RO	487865
	Handle for RO 150 FEQ	BG-RO 150	495188
	Polishing sponge yellow, coarse, for polishing heavily weathered surfaces (preparation for painting) Diameter 150 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D150X30-G/1 PS-STF-D150X30-G/5	493845 493846
	Polishing sponge orange, mid, for preliminary polishing when repairing paint flaws Diameter 150 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D150X30-M-OCS/1 PS-STF-D150X30-M-OCS/5	493852 493853
	Polishing sponge white, fine, for preliminary polishing and finishing when removing trapped dust and for buffing Diameter 150 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D150X30-F/1 PS-STF-D150X30-F/5	493866 493867
	Polishing sponge white, fine, with edge Diameter 150 mm, Height 20 mm, qty. in pack 5 piece(s)	PS-STF-D150X20-F/m.K./5	495180
	Polishing sponge white, fine (honeycombed), for polishing out holograms, for preliminary polishing and finishing when removing dust inclusions Diameter 150 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D150X30-F-GEW/1 PS-STF-D150X30-F-GEW/5	493873 493874
	Polishing sponge beige, fine, for removing paintwork blemishes, for re-polishing when removing dust inclusions Diameter 150 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D150X30-F-OCS/1 PS-STF-D150X30-F-OCS/5	493859 493860
	Polishing sponge black, very fine, for processing sealant, for high-gloss polish Diameter 150 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D150X30-SF-OCS/1 PS-STF-D150X30-SF-OCS/5	493880 493881

PoliStick for Ø 150 mm

	Denomination and application	Type	Order no.
	Polishing sponge black, very fine (honeycombed), for polishing out holograms, for high-gloss polish Diameter 150 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D150X30-SF-OCS/1 PS-STF-D150X30-SF-OCS/5	493887 493888
	Polishing felt hard, for preliminary polishing of mineral materials, acrylic glass and gloss paints Diameter 150 mm, Height 10 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 10 mm, qty. in pack 5 piece(s)	PF-STF-D150x10-H/1 PF-STF-D150x10-H/5	485970 488348
	Polishing felt soft, for re-polishing mineral materials, acrylic glass and gloss paints Diameter 150 mm, Height 10 mm, qty. in pack 1 piece(s) Diameter 150 mm, Height 10 mm, qty. in pack 5 piece(s)	PF-STF-D150x10-W PF-STF-D150x10-W/5	485972 488347
	Sheepskin for polishing scratch-resistant paints Diameter 150 mm, Height 20 mm, qty. in pack 1 piece(s)	LF-STF-D150/1	484131
	Premium sheepskin suitable for UV paints, scratch-resistant paints Diameter 150 mm, Height 20 mm, qty. in pack 1 piece(s)	LF-PREM.-STF-D150/1	493838


PoliStick for Ø 180 mm

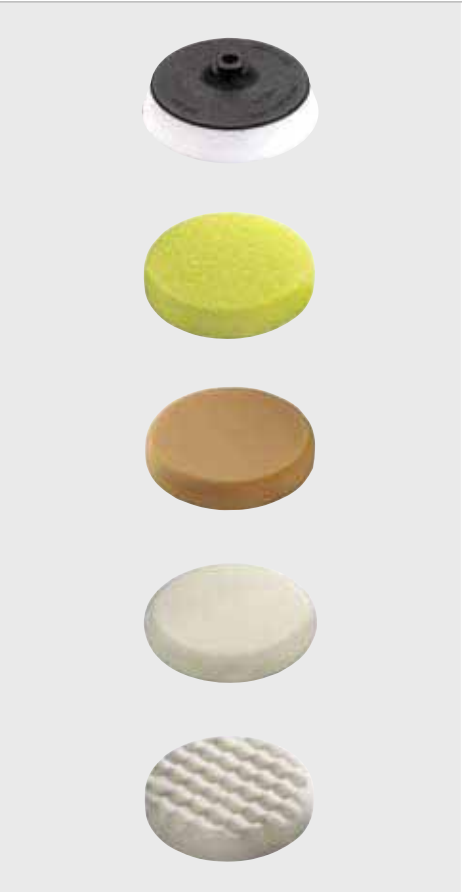











	Denomination and application	Type	Order no.
	Polishing pad for RAP 180 fits polishing accessories, with integrated shock absorber for optimum distribution of pressure during polishing Diameter 165 mm, Height 30 mm, qty. in pack 1 piece(s)	PT-STF-D180-M14	488349
	Polishing sponge yellow, coarse, for polishing heavily weathered surfaces (preparation for painting) Diameter 180 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 180 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D180X30-G/1 PS-STF-D180X30-G/5	493847 493848
	Polishing sponge orange, mid, for preliminary polishing when repairing paint flaws Diameter 180 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 180 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D180X30-M-OCS/1 PS-STF-D180X30-M-OCS/5	493854 493855
	Polishing sponge white, fine, for preliminary polishing and finishing when removing trapped dust and for buffing Diameter 180 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 180 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D180X30-F/1 PS-STF-D180X30-F/5	493868 493869
	Polishing sponge white, fine (honeycombed), for preliminary polishing and finishing when removing dust inclusions, for polishing out holograms Diameter 180 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 180 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D180X30-F-GEW/1 PS-STF-D180X30-F-GEW/5	493875 493876

PoliStick for Ø 180 mm

	Denomination and application	Type	Order no.
	Polishing sponge beige, fine, for removing paintwork blemishes, for re-polishing when removing dust inclusions Diameter 180 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 180 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D180X30-F-OCS/1 PS-STF-D180X30-F-OCS/5	493861 493862
	Polishing sponge black, very fine, for processing sealant, for high-gloss polish Diameter 180 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 180 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D180X30-SF-OCS/1 PS-STF-D180X30-SF-OCS/5	493882 493883
	Polishing sponge black, very fine (honeycombed), for polishing out holograms, for high-gloss polish Diameter 180 mm, Height 30 mm, qty. in pack 1 piece(s) Diameter 180 mm, Height 30 mm, qty. in pack 5 piece(s)	PS-STF-D180X30-SF-OCS/1 PS-STF-D180X30-SF-OCS/5	493889 493890
	Polishing felt hard, for preliminary polishing of mineral materials, acrylic glass and gloss paints Diameter 180 mm, Height 15 mm, qty. in pack 5 piece(s)	PF-STF-D180x15-H/5	488355
	Polishing felt soft, for re-polishing mineral materials, acrylic glass and gloss paints Diameter 180 mm, Height 15 mm, qty. in pack 5 piece(s)	PF-STF-D180x15-W/5	488354
	Sheepskin for polishing scratch-resistant paints Diameter 180 mm, Height 20 mm, qty. in pack 1 piece(s)	LF-STF-D180/1	485248
	Premium sheepskin suitable for UV paints, scratch-resistant paints Diameter 180 mm, Height 20 mm, qty. in pack 1 piece(s)	LF-PREM.-STF-D180/1	493840

Spot sander and sanding pads

	Denomination and application	Type	Order no.
	Self-adhesive sanding disc self-adhesive, in a bag, Titan 2 qty. in pack 100 piece(s), Grit P2000 qty. in pack 1000 piece(s), Grit P2000 qty. in pack 100 piece(s), Grit P2500 qty. in pack 1000 piece(s), Grit P2500 qty. in pack 100 piece(s), Grit 3000 qty. in pack 1000 piece(s), Grit 3000 qty. in pack 100 piece(s), Grit 5000 qty. in pack 1000 piece(s), Grit 5000	SK D36/0 P2000 T12/100 SK D36/0 P2000 T12/1000 SK D36/0 P2500 T12/100 SK D36/0 P2500 T12/1000 SK D36/0 3000 T12/100 SK D36/0 3000 T12/1000 SK D36/0 5000 T12/100 SK D36/0 5000 T12/1000	495059 495058 495061 495060 495063 495062 495065 495064
	Spot sander for self-adhesive sanding D 36 on a roll	RH-SK D 36/1	493069

Polishing agent	Denomination and application	Type	Order no.
	SPEEDCUT polish qty. in pack 1 piece(s), Volume 500 ml	MPA 5000/1	496299
	Polishing agent sanding polish Volume 500 ml, qty. in pack 1 piece(s) Volume 500 ml, qty. in pack 6 piece(s)	MPA 6000/1 MPA 6000/6	492424 492419
 	Polishing agent fine sanding polish Volume 500 ml, qty. in pack 1 piece(s) Volume 500 ml, qty. in pack 6 piece(s) Canister capacity 5 kg	MPA 8000/1 MPA 8000/6 MPA 8000/ 5 kg	493816 493817 494134
	Polishing agent High-gloss polish Volume 500 ml, qty. in pack 1 piece(s) Volume 500 ml, qty. in pack 6 piece(s)	MPA 10000/1 MPA 10000/6	492426 492421
	Polishing agent ceramic high-gloss polish, For polishing UV varnishes Volume 500 ml, qty. in pack 1 piece(s) Canister capacity 5 kg, qty. in pack 1 piece(s)	MPA 10800-UV 0,5L MPA 10800-UV/5KG	495562 494475
 	Polishing agent ceramic high-gloss polish Volume 500 ml, qty. in pack 1 piece(s) Volume 500 ml, qty. in pack 6 piece(s) Canister capacity 5 kg	MPA 11000/1 MPA 11000/6 MPA 11000/5KG	492427 492422 493544
	Finish-Cleaner for removing polish residues and grease marks qty. in pack 1 piece(s), Volume 500 ml	MPA-F	493066
	Sealant Volume 500 ml	MPA-V 0,5L	495223
	Sealant for removing light scratches as well as sealing in a single step Volume 500 ml, qty. in pack 1 piece(s)	MPA 9000/1	496300
	Microfibre cloth for excellent finish of new paints qty. in pack 2 piece(s)	MPA-Microfibre/2	493068

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17